



Is Now Part of



**ON Semiconductor®**

To learn more about ON Semiconductor, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (\_), the underscore (\_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (\_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at [www.onsemi.com](http://www.onsemi.com). Please email any questions regarding the system integration to [Fairchild\\_questions@onsemi.com](mailto:Fairchild_questions@onsemi.com).

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# FAN49103 — 2.5 A, 1.8 MHz, TinyPower™ I<sup>2</sup>C Buck-Boost Regulator

## Features

- 24  $\mu$ A Typical PFM Quiescent Current
- Above 95% Efficiency
- Total Layout Area = 11.61 mm<sup>2</sup>
- Input Voltage Range: 2.5 V to 5.5 V
- Maximum Continuous Load Current:
  - 3.0 A at  $V_{OUT}=3.4$  V,  $V_{IN}=3.3$  V
  - 2.5 A at  $V_{OUT}=3.4$  V,  $V_{IN}=3.0$  V
  - 2.0 A at  $V_{OUT}=3.4$  V,  $V_{IN}=2.5$  V
- I<sup>2</sup>C Compatible Interface
- Programmable Output Voltage:
  - 2.8 V to 4.0 V in 25 mV Steps
- 1.8 MHz Fixed-Frequency Operation in PWM Mode
- Automatic / Seamless Step-up and Step-down Mode Transitions
- Forced PWM and Automatic PFM/PWM Mode Selection
- 0.5  $\mu$ A Typical Shutdown Current
- Low Quiescent Current Pass-Through Mode
- Internal Soft-Start and Output Discharge
- Low Ripple and Excellent Transient Response
- Internally Set, Automatic Safety Protections (UVLO, OTP, SCP, OCP)
- Package: 20 Bump, 0.4 mm Pitch WLCSP

## Applications

- Smart Phones
- Tablets, Netbooks®, Ultra-Mobile PCs
- Portable Devices with Li-ion Battery
- 2G/3G/4G Power Amplifiers
- NFC Applications

## Description

The FAN49103 is a high efficiency buck-boost switching mode regulator which accepts input voltages either above or below the regulated output voltage. Using full-bridge architecture with synchronous rectification, the FAN49103 is capable of delivering up to 2.5 A while regulating the output at 3.4 V. The FAN49103 exhibits seamless transition between step-up and step-down modes reducing output disturbances. The output voltage and operation mode of the regulator can be programmed through an I<sup>2</sup>C interface.

At moderate and light loads, Pulse Frequency Modulation (PFM) is used to operate the device in power-save mode to maintain high efficiency. In PFM mode, the part still exhibits excellent transient response during load steps. At moderate to heavier loads or Forced PWM mode, the regulator switches to PWM fixed-frequency control. While in PWM mode, the regulator operates at a nominal fixed frequency of 1.8 MHz, which allows for reduced external component values.

The FAN49103 is available in a 20-bump 1.615 mm x 2.015 mm with 0.4 mm pitch WLCSP.

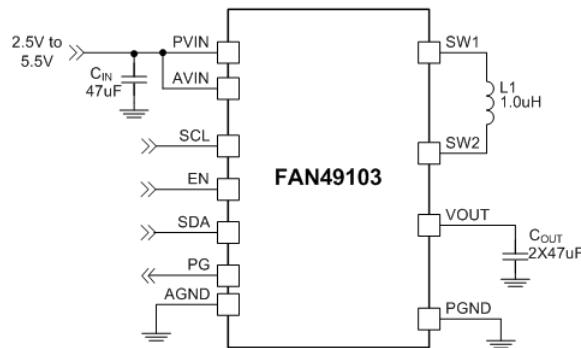


Figure 1. Typical Application

## Ordering Information

Part Number	Output Discharge	Temperature Range	Package	Packing Method	Device Marking
FAN49103AUC340X	Yes	-40 to 85°C	20-Ball (WLCSP)	Tape and Reel	FC

## Block Diagram

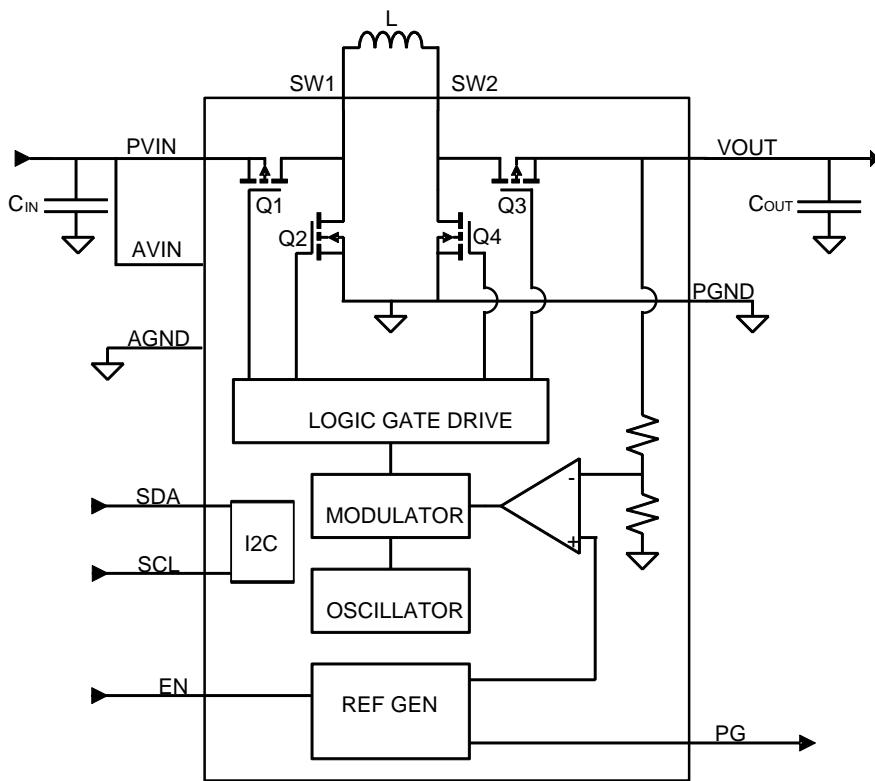


Figure 2. Block Diagram

## Pin Configuration

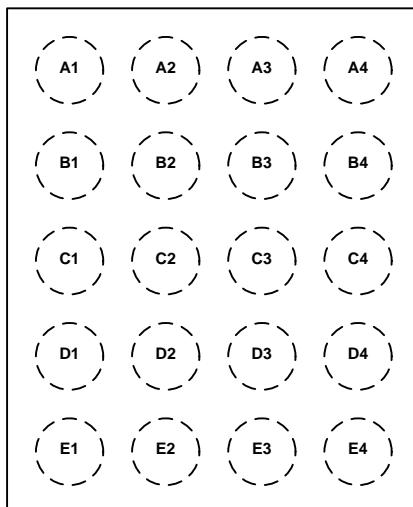


Figure 3. Top View (bump down)

## Pin Definitions<sup>(1)</sup>

Pin #	Name	Description
A3, A4	PVIN	<b>Power Input Voltage.</b> Connect to input power source. Connect to C <sub>IN</sub> with minimal path.
A1	AVIN	<b>Analog Input Voltage.</b> Analog input for device. Connect to C <sub>IN</sub> and PVIN.
A2	EN	<b>Enable.</b> A HIGH logic level on this pin forces the device to be enabled. A LOW logic level forces the device into shutdown. EN pin can be tied to VIN or driven via a GPIO logic voltage.
B3, B4	SW1	<b>Switching Node 1.</b> Connect to inductor L1.
E1	AGND	<b>Analog Ground.</b> Control block signal is referenced to this pin. Short AGND to PGND at GND pad of C <sub>OUT</sub> .
B1, C1, C2, C3, C4, D1	PGND	<b>Power Ground.</b> Low-side MOSFET of buck and main MOSFET of boost are referenced to this pin. C <sub>IN</sub> and C <sub>OUT</sub> should be returned with a minimal path to these pins.
D2	SDA	<b>I<sup>2</sup>C Data Line.</b> Used for I <sup>2</sup> C communication.
D3, D4	SW2	<b>Switching Node 2.</b> Connect to inductor L1.
E2	PG	<b>Power Good.</b> This is an open-drain output and normally High Z. An external pull-up resistor from V <sub>OUT</sub> can be used to generate a logic HIGH. PG is pulled LOW if output falls out of regulation due to current overload or if thermal protection threshold is exceeded. If EN is LOW, PG is high impedance.
B2	SCL	<b>I<sup>2</sup>C Clock Line.</b> Used for I <sup>2</sup> C communication.
E3, E4	VOUT	<b>Output Voltage.</b> Buck-Boost Output. Connect to output load and C <sub>OUT</sub> .

### Note:

1. Refer to Layout Recommendation section located near the end of the datasheet.

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter		Min.	Max.	Unit
PVIN/AVIN	PVIN/AVIN Voltage		-0.3	6.5	V
VOUT	VOUT Voltage		-0.3	6.5	V
SW1, SW2	SW Nodes Voltage		-0.3	7.0	V
	Other Pins		-0.3	6.5	V
ESD	Electrostatic Discharge Protection Level	Human Body Model per JESD22-A114	2000		V
		Charged Device Model per JESD22-C101	1000		
T <sub>J</sub>	Junction Temperature		-40	+150	°C
T <sub>STG</sub>	Storage Temperature		-65	+150	°C
T <sub>L</sub>	Lead Soldering Temperature, 10 Seconds			+260	°C

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Min.	Typ.	Max.	Unit
PVIN	Supply Voltage Range	2.5		5.5	V
I <sub>OUT</sub>	Output Current <sup>(2)</sup>	0		2.5	A
L	Inductor <sup>(5)</sup>		1.0		µH
C <sub>IN</sub>	Input Capacitance <sup>(2,3,4,5)</sup>	2	47		µF
C <sub>OUT</sub>	Output Capacitance <sup>(2,3,4,5)</sup>	17	47		µF
T <sub>A</sub>	Operating Ambient Temperature	-40		+85	°C
T <sub>J</sub>	Operating Junction Temperature	-40		+125	°C

### Notes:

- Depends on input and output voltages. Thermal properties of the device should be taken into consideration; refer to Thermal Consideration in the Application Information section.
- Typical value reflects the capacitor value needed to meet minimum requirement. Minimum passive component values indicate effective capacitance which includes temperature, voltage de-rating, tolerance, and stability.
- Output capacitance affects load transient response and loop phase margin; see Application Information section.
- Refer to Additional Application Information section.

## Thermal Properties

Junction-to-ambient thermal resistance is a function of application and board layout. This data is measured with four-layer 2s2p with vias JEDEC class boards in accordance to JEDEC standard JESD51. Special attention must be paid not to exceed junction temperature T<sub>J(max)</sub> at a given ambient temperature T<sub>A</sub>.

Symbol	Parameter	Min.	Typ.	Max.	Unit
θ <sub>JA</sub>	Junction-to-Ambient Thermal Resistance <sup>(6)</sup>		66		°C/W

### Note:

- See Thermal Considerations in the Application Information section.

**Electrical Characteristics<sup>(7)</sup>**

Minimum and maximum values are at PVIN = AVIN = 2.5 V to 5.5 V, TA = -40°C to +85°C. Typical values are at TA = 25°C, PVIN = AVIN = VEN = 3.6 V, VOUT = 3.4 V.<sup>(8)</sup>

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
<b>Power Supplies</b>						
IQ	Quiescent Current	PFM Mode, I <sub>OUT</sub> = 0 mA <sup>(9)</sup>		24		µA
		PT Mode, I <sub>OUT</sub> = 0 mA		27		
ISD	Shutdown Supply Current	EN = GND, PVIN = 3.6 V		0.5	5.0	µA
V <sub>UVLO</sub>	Under-Voltage Lockout Threshold	Falling PVIN	1.95	2.00	2.05	V
V <sub>UVHYST</sub>	Under-Voltage Lockout Hysteresis			200		mV
<b>EN, SDA, SCL</b>						
V <sub>IH</sub>	HIGH Level Input Voltage		1.1			V
V <sub>IL</sub>	LOW Level Input Voltage				0.4	V
I <sub>IN</sub>	Input Bias Current Into Pin	Input Tied to GND or PVIN		0.01	1.00	µA
<b>PG</b>						
V <sub>PG</sub>	PG LOW	I <sub>PG</sub> = 5 mA			0.4	V
I <sub>PG_LK</sub>	PG Leakage Current	V <sub>PG</sub> = 5 V			1	µA
<b>Switching</b>						
f <sub>sw</sub>	Switching Frequency	PVIN = 3.6 V, TA = 25°C	1.6	1.8	2.0	MHz
I <sub>p_LIM</sub>	Peak PMOS Current Limit	PVIN = 3.6 V	4.6	5.2	5.9	A
<b>Accuracy</b>						
V <sub>OUT_ACC</sub>	DC Output Voltage Accuracy	PVIN = 3.6 V, Forced PWM, I <sub>OUT</sub> = 0 mA, VOUT = 3.4 V	3.366	3.400	3.434	V
		PVIN = 3.6 V, PFM Mode, I <sub>OUT</sub> = 0 mA, VOUT = 3.4 V	3.366	3.475	3.563	

**Notes:**

- Refer to Typical Characteristics waveforms/graphs for Closed-Loop data and its variation with input voltage and ambient temperature. Electrical Characteristics reflects Open-Loop steady state data. System Characteristics reflects both steady state and dynamic Close-Loop data associated with the recommended external components.
- Minimum and Maximum limits are verified by design, test, or statistical analysis. Typical (Typ.) values are not tested, but represent the parametric norm.
- Device is not switching.

## System Characteristics

The following table is verified by design and bench test while using circuit of Figure 1 with the following external components:  $L = 1.0 \mu\text{H}$ , DFE201612E-1R0M (TOKO),  $C_{IN} = 47 \mu\text{F}$ ,  $C_{OUT} = 2 \times 47 \mu\text{F}$ , 0603 (1608 metric) CL10A476MQ8NZNE (SEMCO). Typical values are at  $T_A = 25^\circ\text{C}$ ,  $PVIN = AVIN = V_{EN} = 3.6 \text{ V}$ ,  $VOUT = 3.4 \text{ V}$ . These parameters are not verified in production.


Symbol	Parameter		Min.	Typ.	Max.	Unit
$V_{OUT\_ACC}$	Total Accuracy (Includes DC accuracy and load transient) <sup>(10)</sup>			$\pm 5$		%
$\Delta V_{OUT}$	Load Regulation	$I_{OUT} = 0.4 \text{ A to } 2.5 \text{ A}$ , $PVIN = 3.6 \text{ V}$		-0.20		%/A
$\Delta V_{OUT}$	Line Regulation	$3.0 \text{ V} \leq PVIN \leq 4.2 \text{ V}$ , $I_{OUT} = 1.5 \text{ A}$		-0.06		%/V
$V_{OUT\_RIPPLE}$	Ripple Voltage	$PVIN = 4.2 \text{ V}$ , $VOUT = 3.4 \text{ V}$ , $I_{OUT} = 1 \text{ A}$ , PWM Mode		4		mV
		$PVIN = 3.6 \text{ V}$ , $VOUT = 3.4 \text{ V}$ , $I_{OUT} = 100 \text{ mA}$ , PFM Mode		22		
		$PVIN = 3.0 \text{ V}$ , $VOUT = 3.4 \text{ V}$ , $I_{OUT} = 1 \text{ A}$ , PWM Mode		14		
$\eta$	Efficiency	$PVIN = 3.0 \text{ V}$ , $VOUT = 3.4 \text{ V}$ , $I_{OUT} = 50 \text{ mA}$ , PFM		90		%
		$PVIN = 3.0 \text{ V}$ , $VOUT = 3.4 \text{ V}$ , $I_{OUT} = 500 \text{ mA}$ , PWM		96		
		$PVIN = 3.8 \text{ V}$ , $VOUT = 3.4 \text{ V}$ , $I_{OUT} = 50 \text{ mA}$ , PFM		90		
		$PVIN = 3.8 \text{ V}$ , $VOUT = 3.4 \text{ V}$ , $I_{OUT} = 600 \text{ mA}$ , PWM		94		
		$PVIN = 3.4 \text{ V}$ , $VOUT = 3.4 \text{ V}$ , $I_{OUT} = 300 \text{ mA}$ , PWM		94		
$T_{SS}$	Soft-Start	EN HIGH to 95% of Target VOUT, $I_{OUT} = 68 \text{ mA}$		260		μs
$\Delta V_{OUT\_LOAD}$	Load Transient	$PVIN = 3.4 \text{ V}$ , $I_{OUT} = 0.5 \text{ A} \Leftrightarrow 1 \text{ A}$ , $T_R = T_F = 1 \mu\text{s}$		$\pm 45$		mV
		$PVIN = 3.4 \text{ V}$ , $I_{OUT} = 0.5 \text{ A} \Leftrightarrow 2.0 \text{ A}$ , $T_R = T_F = 1 \mu\text{s}$ , Pulse Width = 577 μs		$\pm 125$		
$\Delta V_{OUT\_LINE}$	Line Transient	$PVIN = 3.0 \text{ V} \Leftrightarrow 3.6 \text{ V}$ , $T_R = T_F = 10 \mu\text{s}$ , $I_{OUT} = 1 \text{ A}$		$\pm 60$		mV

### Note:


- Load transient is from 0.5 A  $\leftrightarrow$  1 A.

## Typical Characteristics


Unless otherwise noted, PVIN = AVIN = V<sub>EN</sub> = 3.6 V, VOUT = 3.4 V, L = 1.0  $\mu$ H, DFE201612E-1R0M (TOKO), C<sub>IN</sub> = 47  $\mu$ F, C<sub>OUT</sub> = 2 x 47  $\mu$ F, 0603 (1608 metric) CL10A476MQ8NZNE (SEMCO), AUTO Mode, T<sub>A</sub> = 25°C.

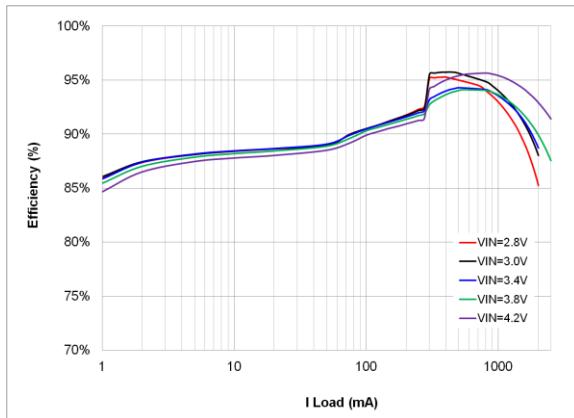


**Figure 4. Efficiency vs. Load**

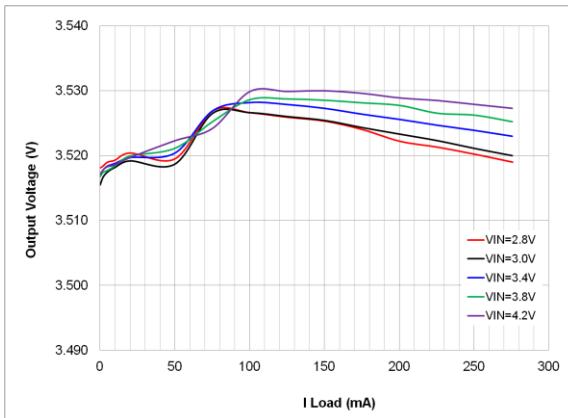


**Figure 5. Output Regulation vs. Load**

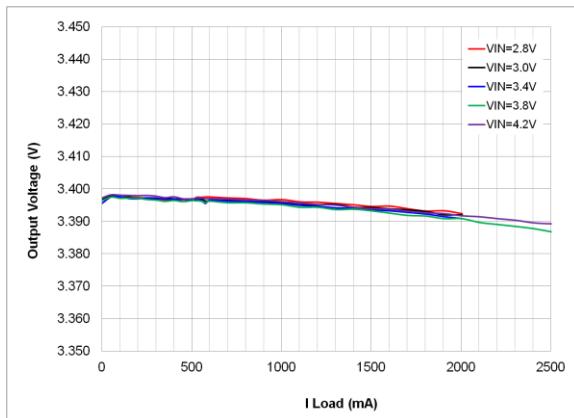


**Figure 6. Output Regulation vs. Load, FPWM Mode**

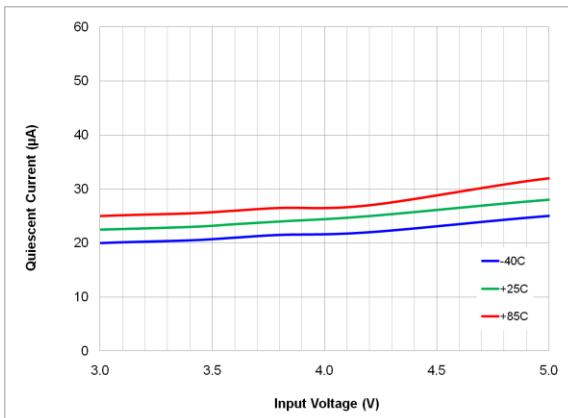

**Figure 7. Quiescent Current (No Switching) vs. Input Voltage**

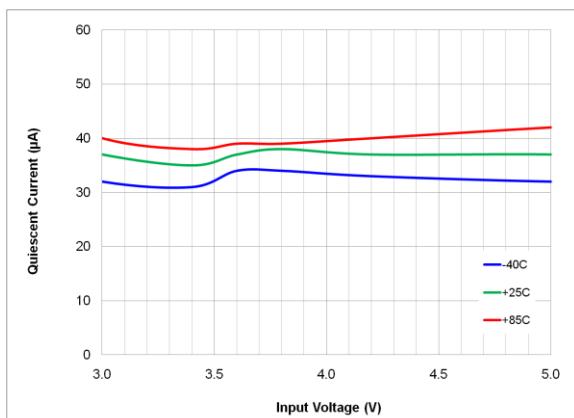

**Figure 8. Quiescent Current (Switching) vs. Input Voltage**

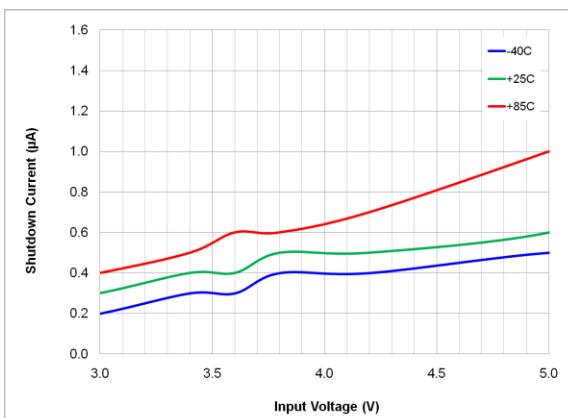

**Figure 9. Shutdown Current vs. Input Voltage**

## Typical Characteristics (Continued)

Unless otherwise noted, PVIN = AVIN = V<sub>EN</sub> = 3.6 V, VOUT = 3.4 V, L = 1.0  $\mu$ H, DFE201612E-1R0M (TOKO), C<sub>IN</sub> = 47  $\mu$ F, C<sub>OUT</sub> = 2 x 47  $\mu$ F, 0603 (1608 metric) CL10A476MQ8NZNE (SEMCO), AUTO Mode, T<sub>A</sub> = 25°C.

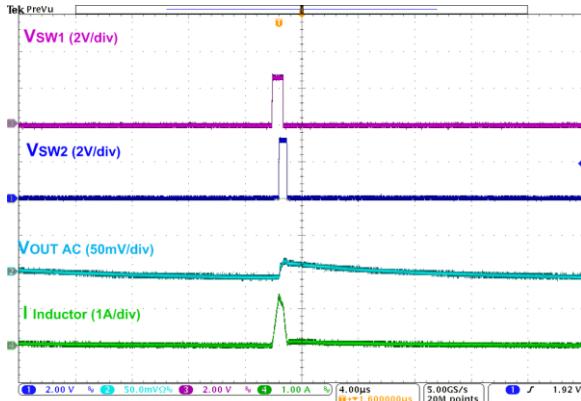


Figure 10. Output Ripple, VIN = 2.8 V, I<sub>OUT</sub> = 20 mA, Boost Operation

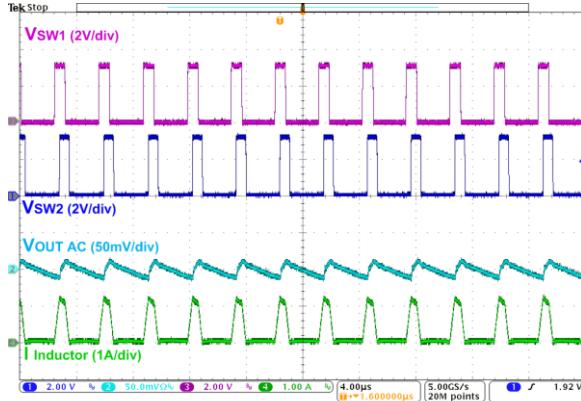


Figure 11. Output Ripple, VIN = 3.3 V, I<sub>OUT</sub> = 200 mA, Buck-Boost Operation

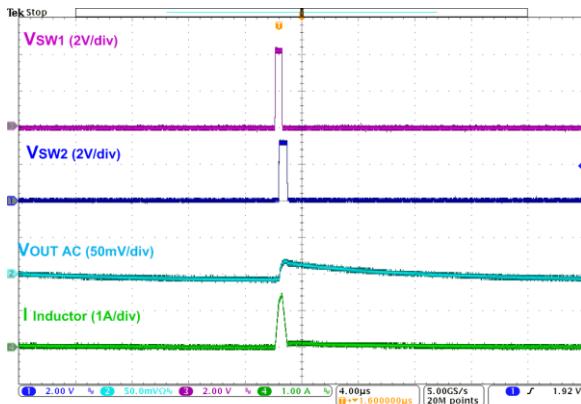


Figure 12. Output Ripple, VIN = 4.2 V, I<sub>OUT</sub> = 20 mA, Buck Operation

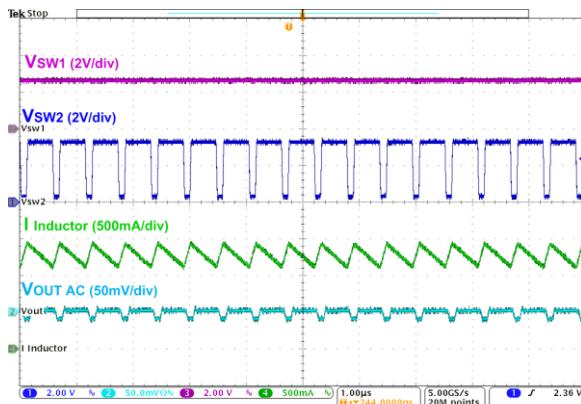


Figure 13. Output Ripple, VIN = 2.5 V, I<sub>OUT</sub> = 1000 mA, Boost Operation

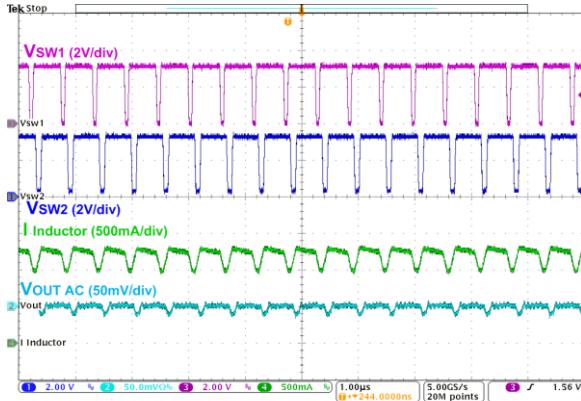


Figure 14. Output Ripple, VIN = 3.3 V, I<sub>OUT</sub> = 1000 mA, Buck-Boost Operation

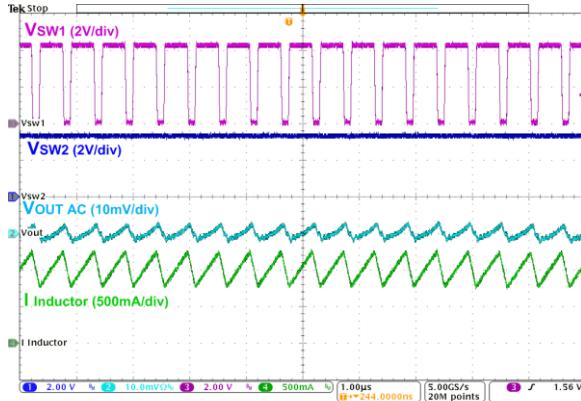


Figure 15. Output Ripple, VIN = 4.5 V, I<sub>OUT</sub> = 1000 mA, Buck Operation

## Typical Characteristics (Continued)

Unless otherwise noted, PVIN = AVIN = V<sub>EN</sub> = 3.6 V, VOUT = 3.4 V, L = 1.0  $\mu$ H, DFE201612E-1R0M (TOKO), C<sub>IN</sub> = 47  $\mu$ F, C<sub>OUT</sub> = 2 x 47  $\mu$ F, 0603 (1608 metric) CL10A476MQ8NZNE (SEMCO), AUTO Mode, T<sub>A</sub> = 25°C.

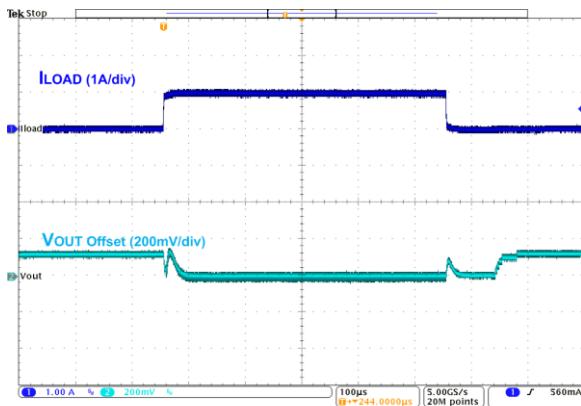


Figure 16. Load Transient, 0 mA  $\leftrightarrow$  1000 mA, 1  $\mu$ s Edge, VIN = 3.60 V

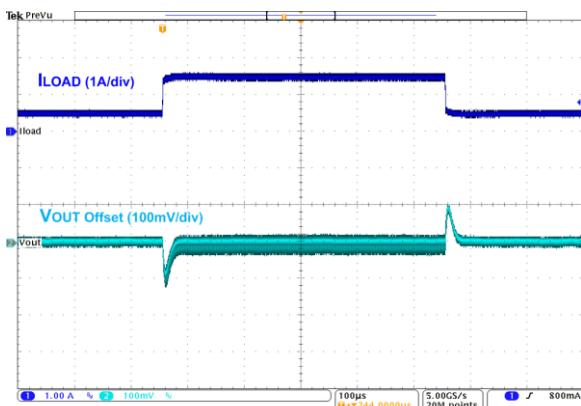


Figure 17. Load Transient, 500 mA  $\leftrightarrow$  1500 mA, 1  $\mu$ s Edge, VIN = 3.60 V

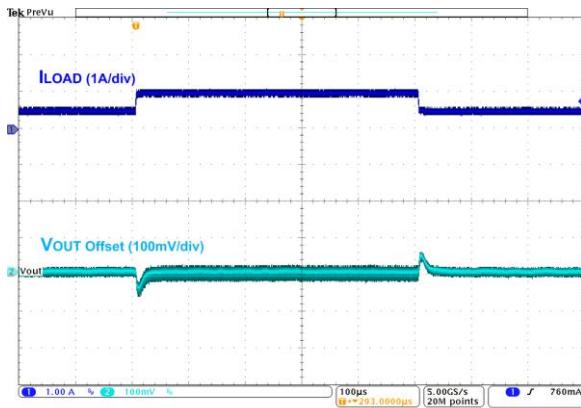


Figure 18. Load Transient, 500 mA  $\leftrightarrow$  1000 mA, 1  $\mu$ s Edge, VIN = 3.40 V

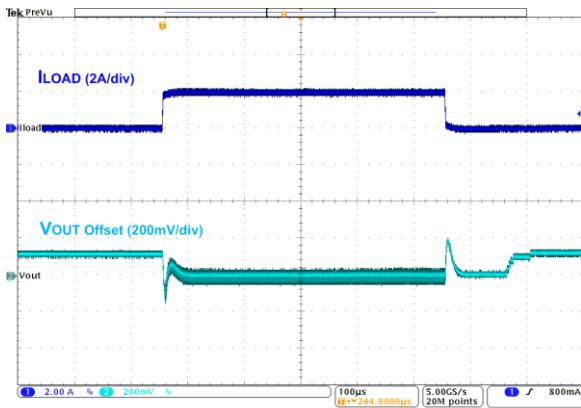


Figure 19. Load Transient, 0 mA  $\leftrightarrow$  2000 mA, 1  $\mu$ s Edge, VIN = 3.60 V

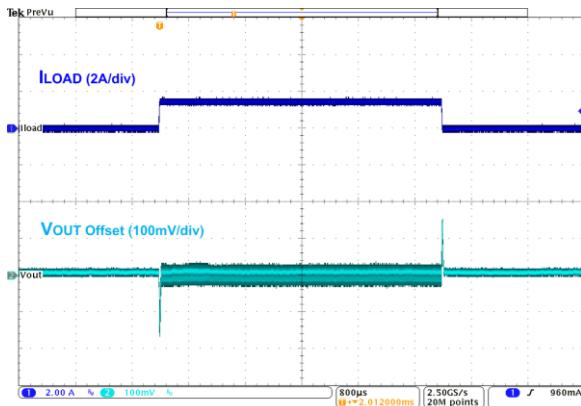


Figure 20. Load Transient, 0 mA  $\leftrightarrow$  1500 mA, 10  $\mu$ s Edge, VIN = 2.80 V, PWM Mode

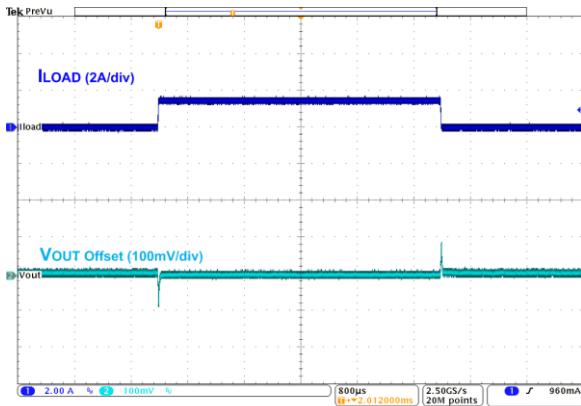


Figure 21. Load Transient, 0 mA  $\leftrightarrow$  1500 mA, 10  $\mu$ s Edge, VIN = 4.20 V, PWM Mode

## Typical Characteristics (Continued)

Unless otherwise noted, PVIN = AVIN = V<sub>EN</sub> = 3.6 V, VOUT = 3.4 V, L = 1.0  $\mu$ H, DFE201612E-1R0M (TOKO), C<sub>IN</sub> = 47  $\mu$ F, C<sub>OUT</sub> = 2 x 47  $\mu$ F, 0603 (1608 metric) CL10A476MQ8NZNE (SEMCO), AUTO Mode, T<sub>A</sub> = 25°C.

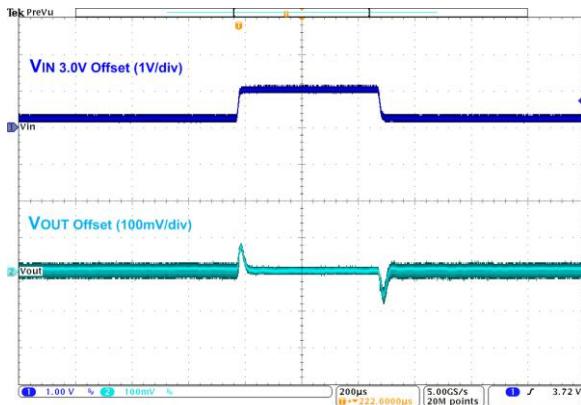


Figure 22. Line Transient, 3.2 <-> 4.0 VIN, 10  $\mu$ s Edge, 1000 mA Load

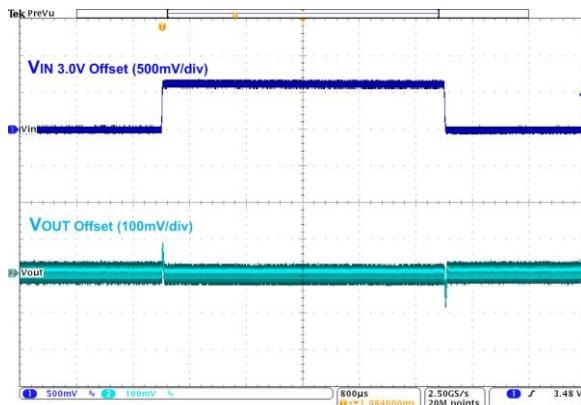


Figure 23. Line Transient, 3.0 <-> 3.6 VIN, 10  $\mu$ s Edge, 1500 mA Load, PWM

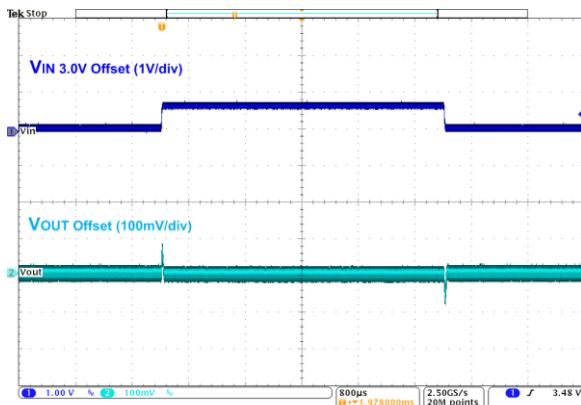


Figure 24. Line Transient, 3.0 <-> 3.6 VIN, 10  $\mu$ s Edge, 1000 mA Load, PWM

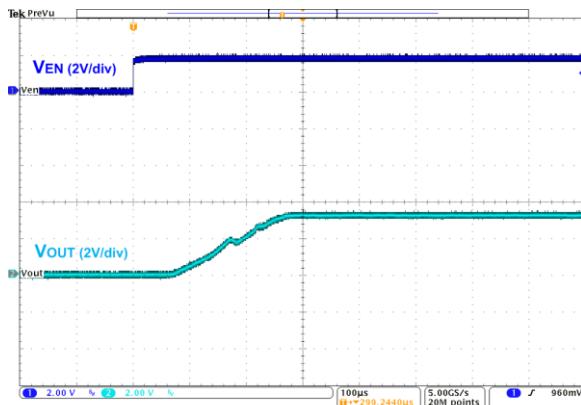


Figure 25. Startup, VIN = 3.6 V, I<sub>OUT</sub> = 0 mA

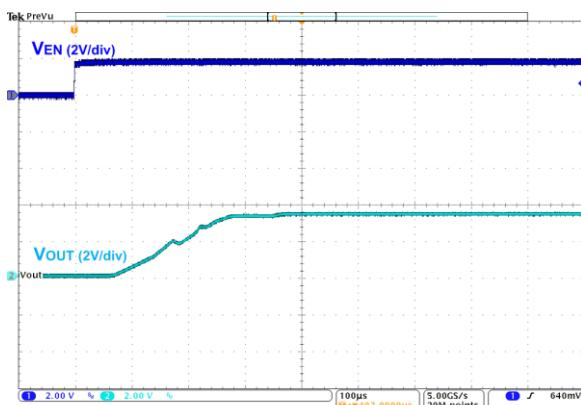


Figure 26. Startup, VIN = 3.6 V, I<sub>OUT</sub> = 68 mA

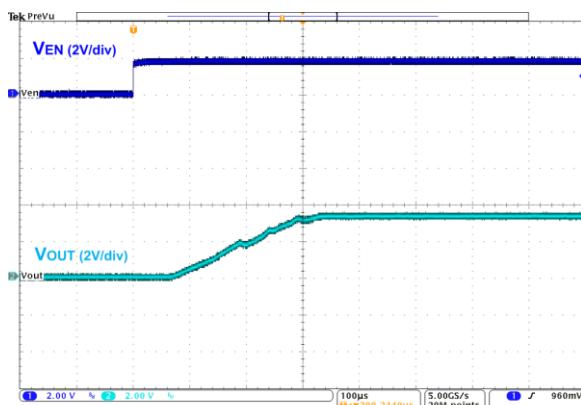


Figure 27. Startup, VIN = 3.6 V, I<sub>OUT</sub> = 1000 mA

## Typical Characteristics (Continued)

Unless otherwise noted, PVIN = AVIN = V<sub>EN</sub> = 3.6 V, VOUT = 3.4 V, L = 1.0  $\mu$ H, DFE201612E-1R0M (TOKO), C<sub>IN</sub> = 47  $\mu$ F, C<sub>OUT</sub> = 2 x 47  $\mu$ F, 0603 (1608 metric) CL10A476MQ8NZNE (SEMCO), AUTO Mode, T<sub>A</sub> = 25°C.

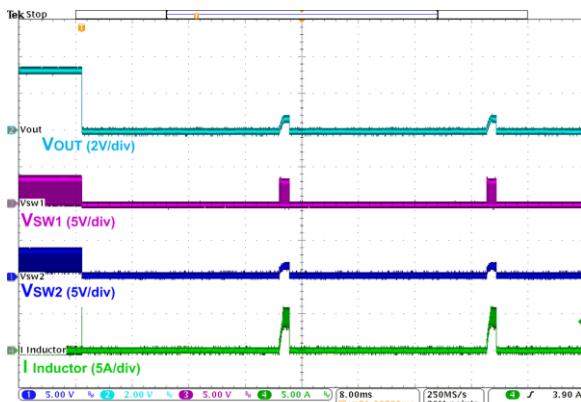


Figure 28. Short-Circuit Protection

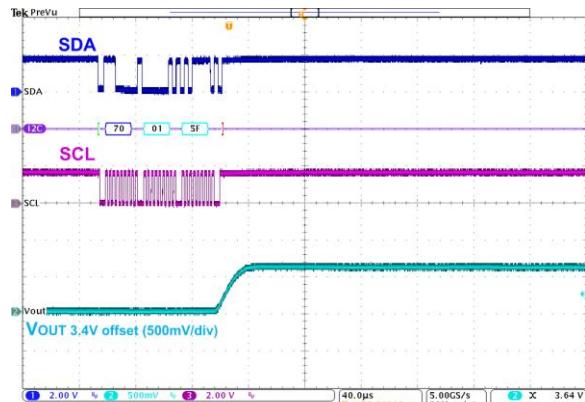


Figure 29. VOUT Transition, 3.4 V <-> 4.0 V, 500 mA Load

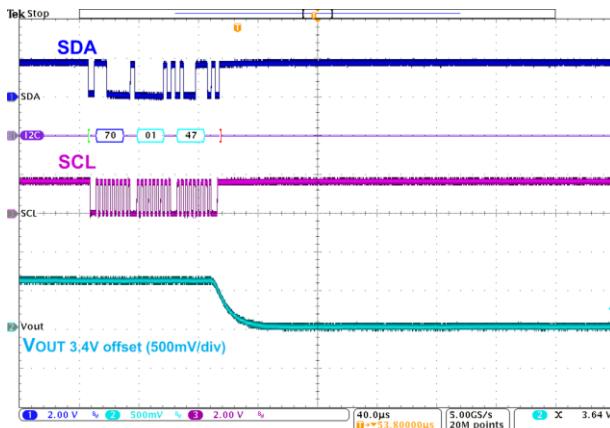


Figure 30. VOUT Transition, 4.0 V <-> 3.4 V, 500 mA Load

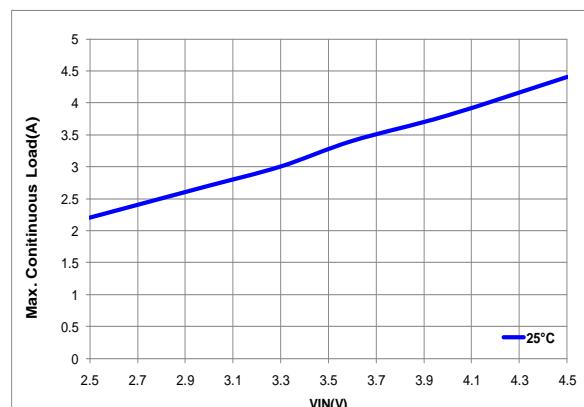


Figure 31. Typical Maximum Continuous Load vs. Input Voltage, V<sub>OUT</sub> = 3.4 V, 25°C

## Application Information

### Functional Description

FAN49103 is a fully integrated synchronous, full bridge DC-DC converter that can operate in buck operation (during high PVIN), boost operation (for low PVIN) and a combination of buck-boost operation when PVIN is close to the target VOUT value. The PWM/PFM controller switches automatically and seamlessly between buck, buck-boost and boost modes.

The FAN49103 uses a four-switch operation during each switching period when in the buck-boost mode. Mode operation is as follows: referring to the power drive stage shown in Figure 32 if PVIN is greater than target VOUT, then the converter is in buck mode: Q3 is ON and Q4 is OFF continuously leaving Q1, Q2 to operate as a current-mode controlled PWM converter. If PVIN is lower than target VOUT then the converter is in boost mode with Q1 ON and Q2 OFF continuously, while leaving Q3, Q4 to operate as a current-mode boost converter. When PVIN is near VOUT, the converter goes into a 3-phase operation in which combines a buck phase, a boost phase and a reset phase; all switches are switching to maintain an average inductor volt-second balance.

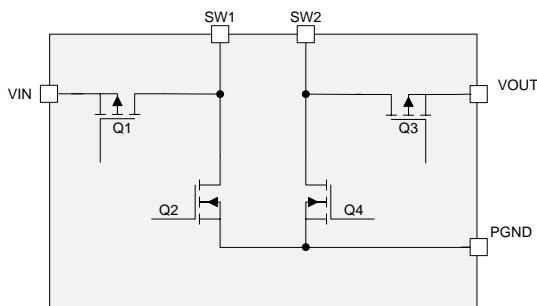


Figure 32. Simplified Block Diagram

### PFM/PWM Mode

The FAN49103 uses a current-mode modulator to achieve smooth transitions between PWM and PFM operation. In Pulsed Frequency Modulation (PFM), frequency is reduced to maintain high efficiency. During PFM operation, the converter positions the output voltage typically 75 mV higher than the nominal output voltage during PWM operation, allowing additional headroom for voltage drop during a load transient from light to heavy load. As the load increased from light loads, the converter enters PWM operation typically at 300 mA of current load. The converter switching frequency is typically 1.8 MHz during PWM operation for moderate to heavy load currents.

### PT (Pass-Through) Mode

In Pass-Through mode, all of the switches are not switching and VOUT tracks PVIN ( $VOUT = PVIN - I_{OUT} * (Q1_{RDSON} + Q3_{RDSON} + L_{DCR})$ ) In PT mode only Over-Temperature (OTP) and Under Voltage Lockout (UVLO) protection circuits are activated. There is no Over-Current Protection (OCP) in PT mode.

### Shutdown and Startup

When the EN pin is LOW, the IC is shut down, all internal circuits are off, and the part draws very little current. During shutdown, VOUT is isolated from PVIN. Raising EN pin activates the device and begins the soft-start cycle. During soft-start, the modulator's internal reference is ramped slowly to minimize surge currents on the input and prevent overshoot of the output voltage. If VOUT fails to reach target VOUT value after 1ms, a FAULT condition is declared.

### Over-Temperature (OTP)

The regulator shuts down when the die temperature exceeds 150°C. Restart occurs when the IC has cooled by approximately 20°C.

### Output Discharge

When the regulator is disabled and driving the EN pin LOW, a 230 Ω internal resistor is activated between VOUT and GND. The Output Discharge is not activated during a FAULT state condition.

### Over-Current Protection (OCP)

If the peak current limit is activated for a typical 700 μs, a FAULT state is generated, so that the IC protects itself as well as external components and load.

### FAULT State

The regulator enters the FAULT state under any of the following conditions:

- VOUT fails to achieve the voltage required after soft-start.
- Peak current limit triggers.
- OTP or UVLO are triggered.

Once a FAULT is triggered, the regulator stops switching and presents a high-impedance path between PVIN and VOUT. After waiting 30 ms, a restart is attempted.

### Power Good

PG, an open-drain output, is LOW during FAULT state and HIGH for Power Good.

The PG pin is provided for signaling the system when the regulator has successfully completed soft-start and no FAULTs have occurred. PG pin also functions as a warning flag for high die temperature and overload conditions.

- PG is released HIGH when the soft-start sequence is successfully completed.
- PG is pulled LOW when a FAULT is declared.

Any FAULT condition causes PG to be de-asserted.

## Thermal Considerations

For best performance, the die temperature and the power dissipated should be kept at moderate values. The maximum power dissipated can be evaluated based on the following relationship:

$$P_{D(\max)} = \left\{ \frac{T_{J(\max)} - T_A}{\Theta_{JA}} \right\} \quad (1)$$

where  $T_{J(\max)}$  is the maximum allowable junction temperature of the die;  $T_A$  is the ambient operating temperature; and  $\theta_{JA}$  is dependent on the surrounding PCB layout and can be improved by providing a heat sink of surrounding copper ground.

The addition of backside copper with through-holes, stiffeners, and other enhancements can help reduce  $\theta_{JA}$ . The heat contributed by the dissipation of devices nearby must be included in design considerations. Following the layout recommendation may lower the  $\theta_{JA}$ .

## I<sup>2</sup>C Interface

The FAN49103's serial interface is compatible with Standard, Fast, Fast Plus, and HS Mode I<sup>2</sup>C-Bus® specifications. The SCL line is an input and its SDA line is a bi-directional open-drain output; it can only pull down the bus when active. The SDA line only pulls LOW during data reads and when signaling ACK. All data is shifted in MSB (bit 7) first.

## I<sup>2</sup>C Slave Address


In hex notation, the slave address assumes a 0 LS Bit. The hex slave address is F0.

Table 1. I<sup>2</sup>C Slave Address

Hex	Bits							
	7	6	5	4	3	2	1	0
E0	1	1	1	0	0	0	0	R/W


## Bus Timing

As shown in Figure 33, data is normally transferred when SCL is LOW. Data is clocked in on the rising edge of SCL. Typically, data transitions shortly at or after the falling edge of SCL to allow ample time for the data to set up before the next SCL rising edge.




**Figure 33. Data Transfer Timing**

Each bus transaction begins and ends with SDA and SCL HIGH. A transaction begins with a START condition, which is defined as SDA transitioning from 1 to 0 with SCL HIGH, as shown in Figure 34.

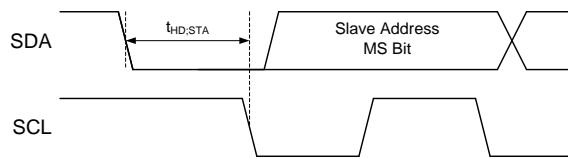

**Figure 34. START Bit**

A transaction ends with a STOP condition, which is defined as SDA transitioning from 0 to 1 with SCL HIGH, as shown in Figure 35.

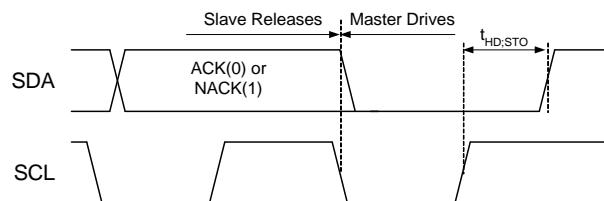

**Figure 35.** STOP Bit

During a read from the FAN49103, the master issues a REPEATED START after sending the register address, and before resending the slave address. The REPEATED START is a 1 to 0 transition on SDA while SCL is HIGH, as shown in Figure 36.

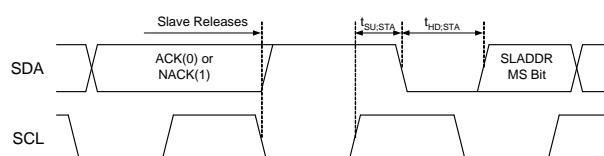


Figure 36. REPEATED START Timing

## High-Speed (HS) Mode

The protocols for High-Speed (HS), Low-Speed (LS), and Fast-Speed (FS) Modes are identical; except the bus speed for HS mode is 3.4 MHz. HS Mode is entered when the bus master sends the HS master code 00001XXX after a START condition. The master code is sent in Fast or Fast-Plus Mode (less than 1 MHz clock); slaves do not ACK this transmission.

The master generates a REPEATED START condition (Figure 34) that causes all slaves on the bus to switch to HS Mode. The master then sends I<sup>2</sup>C packets, as described above, using the HS Mode clock rate and timing.

The bus remains in HS Mode until a STOP bit (Figure 35) is sent by the master. While in HS Mode, packets are separated by REPEATED START conditions (Figure 36).

## Read and Write Transactions

The following figures outline the sequences for data read and write. Bus control is signified by the shading of the packet, defined as **Master Drives Bus** and **Slave Drives Bus**. All addresses and data are MSB first.

**Table 2. I<sup>2</sup>C Bit Definitions for Figure 37 & Figure 38**

Symbol	Definition
R	REPEATED START, see <i>Figure 36</i>
P	STOP, see <i>Figure 35</i>
S	START, see <i>Figure 34</i>
A	ACK. The slave drives SDA to 0 to acknowledge the preceding packet.
$\bar{A}$	NACK. The slave sends a 1 to NACK the preceding packet.
R	REPEATED START, see <i>Figure 36</i> .
P	STOP, see <i>Figure 35</i> .



**Figure 37. Write Transaction**



**Figure 38. Read Transaction**

## Register Description

**Table 3. Register Table**

Hex Address	Name	Function
00	SOFT-RESET	Resets all registers to default values.
01	VOUT_REF	Set the target regulation point of VOUT.
02	CONTROL	PT and MODE control.
40	Manufacturer_ID	Read-only register identifies vendor and device type.
41	Device_ID	Read-only register identifies die ID.

## Bit Definitions

The following table defines the operation of each register bit. **Bold** indicates power-on default values.

Bit	Name	Value	Description																																																																																																																																								
	<b>SOFT-RESET</b>	<b>W</b>	<b>Register Address: 00</b>																																																																																																																																								
7:1	Reserved	<b>0000000</b>																																																																																																																																									
0	Soft_reset	<b>0</b>	Write 1 to reset all registers.																																																																																																																																								
	<b>VOUT_REF</b>	<b>R/W</b>	<b>Register Address: 01</b>																																																																																																																																								
7	Reserved	<b>0</b>	Sets the target regulation point for VOUT.																																																																																																																																								
6:0	Ref_dac_code	<b>1000111</b>	<table border="1"> <thead> <tr> <th>HEX</th> <th>VOUT</th> <th></th> <th>HEX</th> <th>VOUT</th> </tr> </thead> <tbody> <tr><td>00 - 2E</td><td>Reserved</td><td></td><td>47</td><td>3.400</td></tr> <tr><td>2F</td><td>2.800</td><td></td><td>48</td><td>3.425</td></tr> <tr><td>30</td><td>2.825</td><td></td><td>49</td><td>3.450</td></tr> <tr><td>31</td><td>2.850</td><td></td><td>4A</td><td>3.475</td></tr> <tr><td>32</td><td>2.875</td><td></td><td>4B</td><td>3.500</td></tr> <tr><td>33</td><td>2.900</td><td></td><td>4C</td><td>3.525</td></tr> <tr><td>34</td><td>2.925</td><td></td><td>4D</td><td>3.550</td></tr> <tr><td>35</td><td>2.950</td><td></td><td>4E</td><td>3.575</td></tr> <tr><td>36</td><td>2.975</td><td></td><td>4F</td><td>3.600</td></tr> <tr><td>37</td><td>3.000</td><td></td><td>50</td><td>3.625</td></tr> <tr><td>38</td><td>3.025</td><td></td><td>51</td><td>3.650</td></tr> <tr><td>39</td><td>3.050</td><td></td><td>52</td><td>3.675</td></tr> <tr><td>3A</td><td>3.075</td><td></td><td>53</td><td>3.700</td></tr> <tr><td>3B</td><td>3.100</td><td></td><td>54</td><td>3.725</td></tr> <tr><td>3C</td><td>3.125</td><td></td><td>55</td><td>3.750</td></tr> <tr><td>3D</td><td>3.150</td><td></td><td>56</td><td>3.775</td></tr> <tr><td>3E</td><td>3.175</td><td></td><td>57</td><td>3.800</td></tr> <tr><td>3F</td><td>3.200</td><td></td><td>58</td><td>3.825</td></tr> <tr><td>40</td><td>3.225</td><td></td><td>59</td><td>3.850</td></tr> <tr><td>41</td><td>3.250</td><td></td><td>5A</td><td>3.875</td></tr> <tr><td>42</td><td>3.275</td><td></td><td>5B</td><td>3.900</td></tr> <tr><td>43</td><td>3.300</td><td></td><td>5C</td><td>3.925</td></tr> <tr><td>44</td><td>3.325</td><td></td><td>5D</td><td>3.950</td></tr> <tr><td>45</td><td>3.350</td><td></td><td>5E</td><td>3.975</td></tr> <tr><td>46</td><td>3.375</td><td></td><td>5F</td><td>4</td></tr> <tr><td></td><td></td><td></td><td>60 - 7F</td><td>Reserved</td></tr> </tbody> </table>	HEX	VOUT		HEX	VOUT	00 - 2E	Reserved		47	3.400	2F	2.800		48	3.425	30	2.825		49	3.450	31	2.850		4A	3.475	32	2.875		4B	3.500	33	2.900		4C	3.525	34	2.925		4D	3.550	35	2.950		4E	3.575	36	2.975		4F	3.600	37	3.000		50	3.625	38	3.025		51	3.650	39	3.050		52	3.675	3A	3.075		53	3.700	3B	3.100		54	3.725	3C	3.125		55	3.750	3D	3.150		56	3.775	3E	3.175		57	3.800	3F	3.200		58	3.825	40	3.225		59	3.850	41	3.250		5A	3.875	42	3.275		5B	3.900	43	3.300		5C	3.925	44	3.325		5D	3.950	45	3.350		5E	3.975	46	3.375		5F	4				60 - 7F	Reserved	
HEX	VOUT		HEX	VOUT																																																																																																																																							
00 - 2E	Reserved		47	3.400																																																																																																																																							
2F	2.800		48	3.425																																																																																																																																							
30	2.825		49	3.450																																																																																																																																							
31	2.850		4A	3.475																																																																																																																																							
32	2.875		4B	3.500																																																																																																																																							
33	2.900		4C	3.525																																																																																																																																							
34	2.925		4D	3.550																																																																																																																																							
35	2.950		4E	3.575																																																																																																																																							
36	2.975		4F	3.600																																																																																																																																							
37	3.000		50	3.625																																																																																																																																							
38	3.025		51	3.650																																																																																																																																							
39	3.050		52	3.675																																																																																																																																							
3A	3.075		53	3.700																																																																																																																																							
3B	3.100		54	3.725																																																																																																																																							
3C	3.125		55	3.750																																																																																																																																							
3D	3.150		56	3.775																																																																																																																																							
3E	3.175		57	3.800																																																																																																																																							
3F	3.200		58	3.825																																																																																																																																							
40	3.225		59	3.850																																																																																																																																							
41	3.250		5A	3.875																																																																																																																																							
42	3.275		5B	3.900																																																																																																																																							
43	3.300		5C	3.925																																																																																																																																							
44	3.325		5D	3.950																																																																																																																																							
45	3.350		5E	3.975																																																																																																																																							
46	3.375		5F	4																																																																																																																																							
			60 - 7F	Reserved																																																																																																																																							
	<b>CONTROL</b>	<b>R/W</b>	<b>Register Address: 02</b>																																																																																																																																								
7:4	Reserved	<b>0000</b>																																																																																																																																									
3	i2c_pt_in	<b>0</b>	Enables Pass-Through mode. <table border="1"> <thead> <tr> <th>Code</th> <th>Mode</th> </tr> </thead> <tbody> <tr><td>0</td><td>Regulated output (Boost, Buck or Buck-Boost)</td></tr> <tr><td>1</td><td>Pass-Through enabled</td></tr> </tbody> </table>		Code	Mode	0	Regulated output (Boost, Buck or Buck-Boost)	1	Pass-Through enabled																																																																																																																																	
Code	Mode																																																																																																																																										
0	Regulated output (Boost, Buck or Buck-Boost)																																																																																																																																										
1	Pass-Through enabled																																																																																																																																										
2	i2c_mode_in	<b>0</b>	Enables Forced PWM mode, as long as Pass-Through is not enabled. <table border="1"> <thead> <tr> <th>Code</th> <th>Mode</th> </tr> </thead> <tbody> <tr><td>0</td><td>Auto PWM - PFM mode based on load</td></tr> <tr><td>1</td><td>Forced PWM mode enabled</td></tr> </tbody> </table>		Code	Mode	0	Auto PWM - PFM mode based on load	1	Forced PWM mode enabled																																																																																																																																	
Code	Mode																																																																																																																																										
0	Auto PWM - PFM mode based on load																																																																																																																																										
1	Forced PWM mode enabled																																																																																																																																										
1:0	Reserved	<b>00</b>																																																																																																																																									
	<b>Manufacturer_ID</b>	<b>R</b>	<b>Register Address: 40</b>																																																																																																																																								
7:0	Manufacture_ID	<b>10000011</b>																																																																																																																																									
	<b>Device_ID</b>	<b>R</b>	<b>Register Address: 41</b>																																																																																																																																								
7:0	Device_ID	<b>00000110</b>																																																																																																																																									

## Additional Application Information

**Table 4. Recommended Capacitors**

Capacitor	Part Number	Vendor	Value	Case Size	Rating
$C_{IN}$	CL10A476MQ8NZNE	SEMCO	47 $\mu$ F	0603 (1608 Metric)	6.3 V
$C_{OUT}$	CL10A476MQ8NZNE	SEMCO	2 x 47 $\mu$ F	0603 (1608 Metric)	6.3 V

### Output Capacitance ( $C_{OUT}$ ) and Input Capacitance ( $C_{IN}$ ) Stability

The effective capacitance ( $C_{EFF}$ ) of small, high-value, ceramic capacitors will decrease as bias voltage increases. FAN49103 is guaranteed for stable operation with the minimum value of 17  $\mu$ F ( $C_{EFF(MIN)}$ ) output capacitance when using a 1  $\mu$ H value inductor and a minimum value of 13  $\mu$ F ( $C_{EFF(MIN)}$ ) output capacitance when using a 0.47  $\mu$ H value inductor. Furthermore, FAN49103 is guaranteed for stable operation with the minimum value of 2  $\mu$ F ( $C_{EFF(MIN)}$ ) input capacitance. De-rating factors should be taken into consideration to ensure selected components meet minimum requirement.

**Table 5. Minimum  $C_{EFF}^{(11)}$  Required for Stability**

V <sub>OUT</sub> (V)	I <sub>LOAD</sub> (A)	Inductor Value	$C_{EFF(MIN)}$
3.4 V	0 – 2.5 A	1.0 $\mu$ H	17 $\mu$ F
3.4 V	0 – 2.5 A	0.47 $\mu$ H	13 $\mu$ F

**Note:**

11.  $C_{EFF}$  is defined as the capacitance value during operating conditions and not the capacitor value. A capacitor varies with manufacturer, material, case size, voltage rating and temperature.

### Inductor Selection

Recommended nominal inductance value is 1.0  $\mu$ H. An inductor value of 0.47  $\mu$ H can be used but higher peak currents could lead to lower efficiency; however, transient response performance may be improved. FAN49103 employs peak current limiting and the peak inductor current can reach typically 5.2 A for a short duration during overload conditions. Therefore, current saturation value should be taken into consideration when choosing an inductor.

**Table 6. Recommended Inductors**

Part Number	Vendor	Value	Dimension	I <sub>sat</sub>	DCR
DFE201610E1R0M	TOKO	1.0 $\mu$ H	2.0 mm x 1.6 mm x 1.0 mm	3.9 A	48 m $\Omega$
DFE201612E1R0M			2.0 mm x 1.6 mm x 1.2 mm	4.4 A	40 m $\Omega$
DFE201610ER47M		0.47 $\mu$ H <sup>(12)</sup> (Optional)	2.0 mm x 1.6 mm x 1.0 mm	5.3 A	26 m $\Omega$
DFE201612ER47M			2.0 mm x 1.6 mm x 1.2 mm	6.1 A	20 m $\Omega$

**Note:**

12. When using 0.47  $\mu$ H inductor value, one 47  $\mu$ F (CL10A476MQ8NZNE) capacitor can be used at the output of the regulator.

## Layout Recommendations

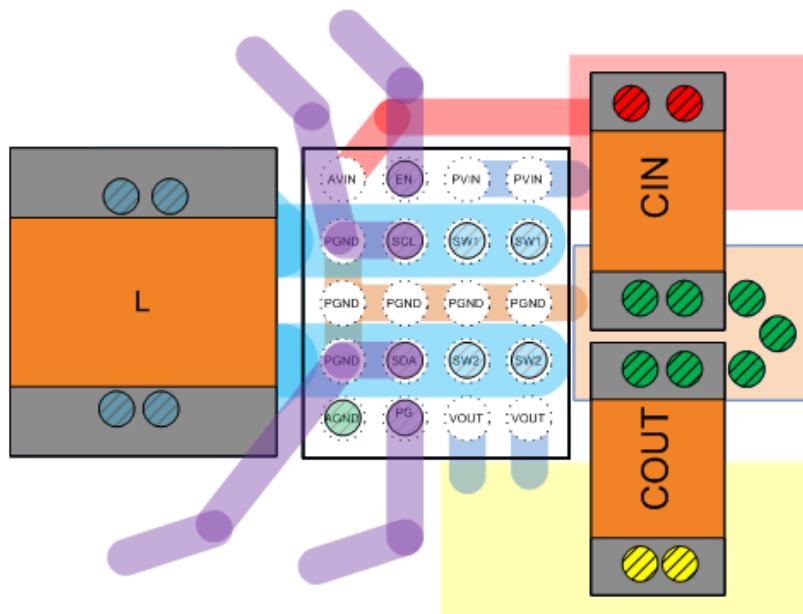


Figure 39. Component Placement and Routing for FAN49103



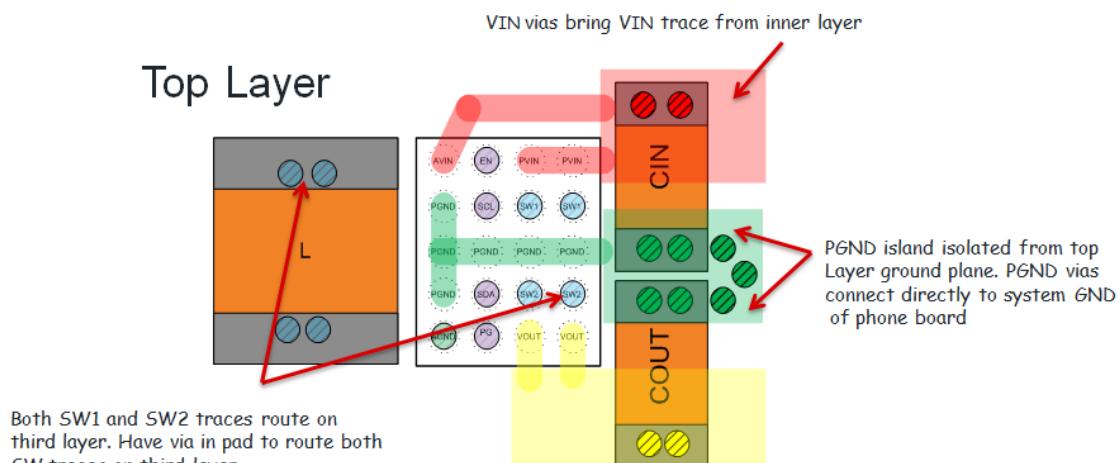


Figure 40. Top Layer Routing for FAN49103

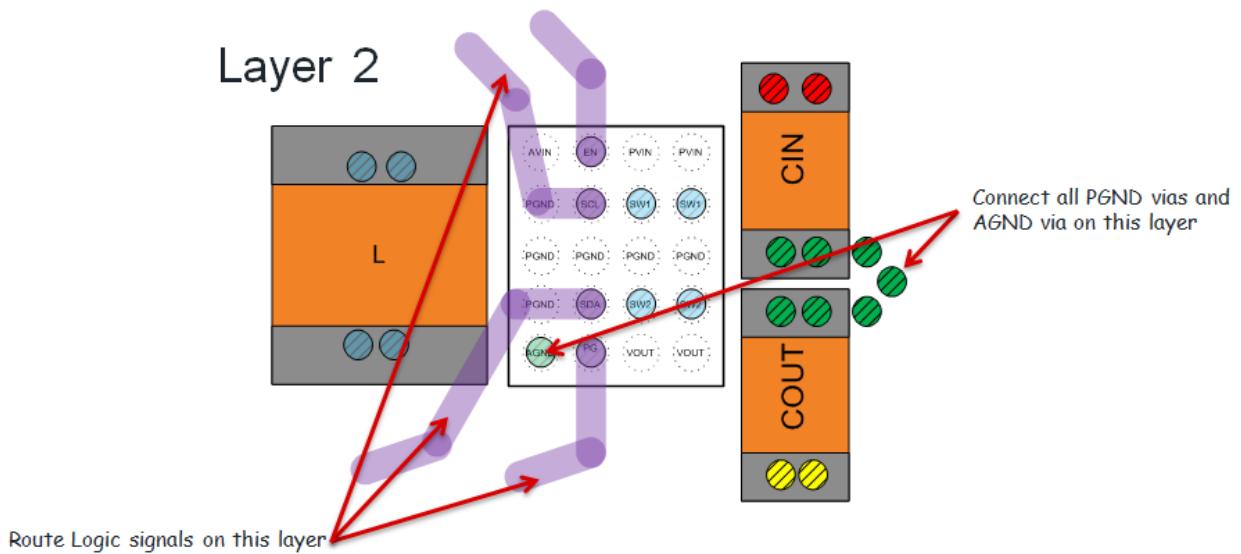

**Figure 41. Layer 2 Routing for FAN49103**

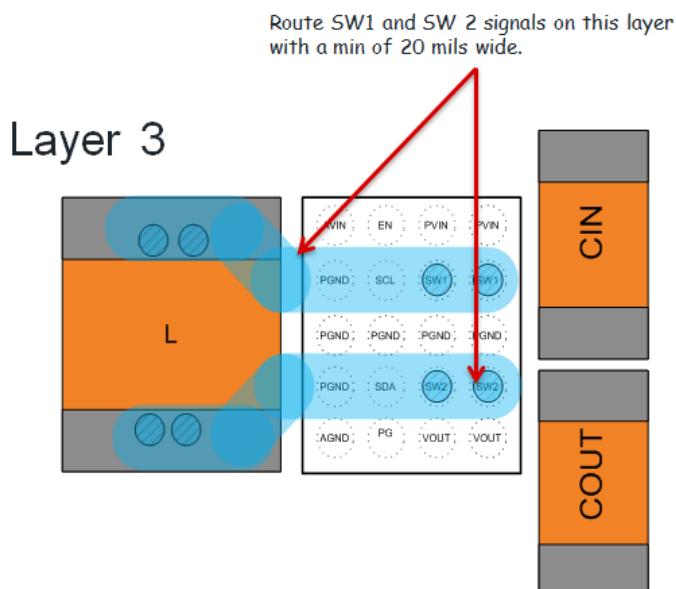


**Figure 42. Layer 3 Routing for FAN49103**


## **Physical Dimensions**

This table information applies to the Package drawing on the following page.


<b>Product</b>	<b>D</b>	<b>E</b>	<b>X</b>	<b>Y</b>
FAN49103AUC340X	2.015 ±0.030	1.615 ±0.030	0.2075	0.2075

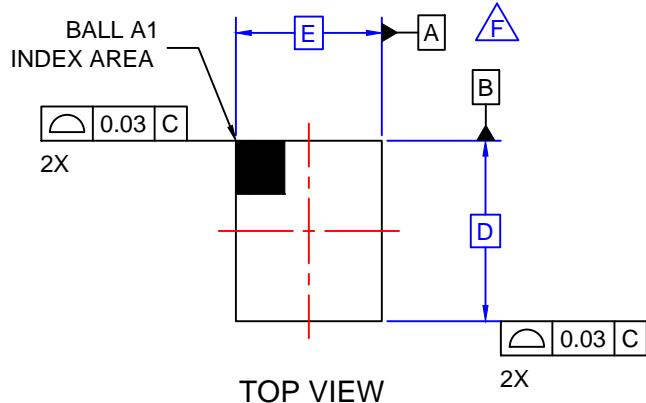


TOP VIEW

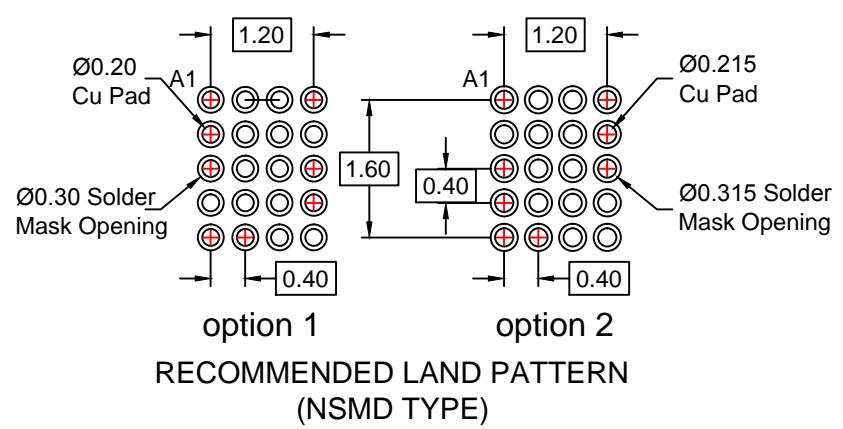

RECOMMENDED LAND PATTERN  
(NSMD TYPE)

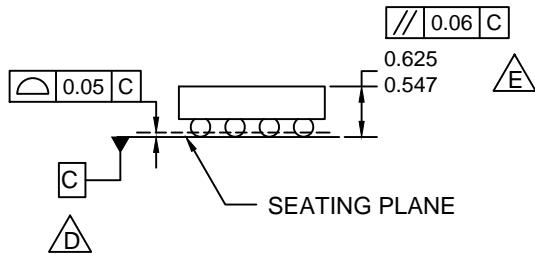


SIDE VIEWS

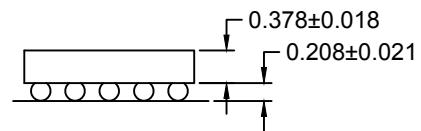

### NOTES:

- A. NO JEDEC REGISTRATION APPLIES.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCE PER ASME Y14.5M, 2009.
- D. DATUM C IS DEFINED BY THE SPHERICAL CROWNS OF THE BALLS.
- E. PACKAGE NOMINAL HEIGHT IS 586 MICRONS ±39 MICRONS (547-625 MICRONS).
- F. FOR DIMENSIONS D, E, X, AND Y SEE PRODUCT DATASHEET.
- G. DRAWING FILNAME: MKT-UC020AArev4.

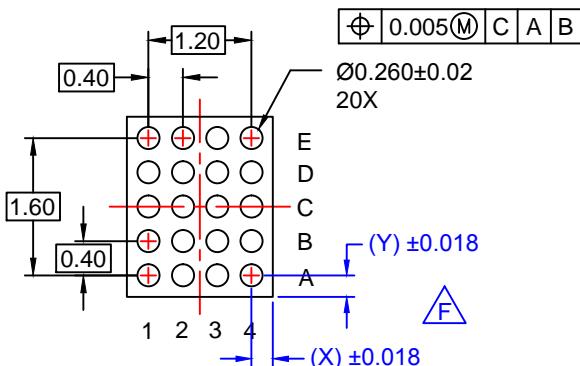

BOTTOM VIEW



ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative