


SURFACE MOUNT OSCILLATORS **TAPE AND REEL SPECIFICATIONS**

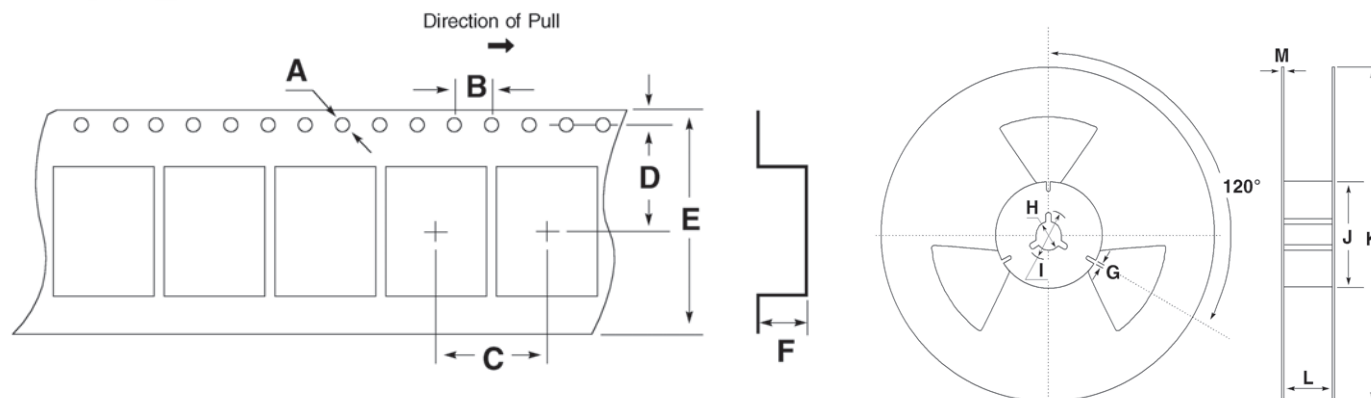

• TAPE SPECIFICATIONS (millimeters)

MODEL	A	B	C	D	E	F	STD QTY ¹
F310/F330/F340 Series	Ø1.5	4.0	4.0	3.5	8.0	1.3	3,000
F510L/F520L/F540L Series	Ø1.5	4.0	8.0	7.5	16.0	2.5	2,000
F530L Series	Ø1.5	4.0	8.0	7.5	16.0	2.5	2,000
F4200 Series	Ø1.5	4.0	8.0	5.5	12.0	1.9	2,000
F4500 Series	Ø1.5	4.0	8.0	7.5	16.0	2.15	2,000
F4400 Series	Ø1.5	4.0	8.0	7.5	16.0	2.15	2,000
F4300 Series	Ø1.5	4.0	8.0	7.5	16.0	2.15	2,000
F4100 Series	Ø1.5	4.0	8.0	7.5	16.0	2.15	2,000
F3345 Series	Ø1.5	4.0	8.0	7.5	16.0	2.15	2,000
F4600 Series	Ø1.5	4.0	8.0	7.5	16.0	2.15	2,000
F4700/F4710 Series	Ø1.5	4.0	8.0	7.5	16.0	2.15	2,000
RFX250/RFX300	Ø1.5	4.0	8.0	7.5	16.0	2.15	2,000
FSO Series	Ø1.5	4.0	12.0	11.5	24.0	5.0	1,000

¹ Standard reel quantity.

• REEL SPECIFICATIONS (millimeters)

MODEL	G	H	I	J	K	L	M
F310/F330/F340 Series	2.0	Ø13	Ø21	Ø60	Ø180	9.0	1.2
F510L/F520L/F540L Series	2.0	Ø13	Ø21	Ø80	Ø250	13.5	2.0
F530L Series	2.0	Ø13	Ø21	Ø80	Ø250	13.5	2.0
F4200 Series	2.0	Ø13	Ø21	Ø80	Ø255	13.5	2.0
F4500 Series	2.0	Ø13	Ø21	Ø80	Ø255	17.5	2.0
F4400 Series	2.0	Ø13	Ø21	Ø80	Ø255	17.5	2.0
F4300 Series	2.0	Ø13	Ø21	Ø80	Ø255	17.5	2.0
F4100 Series	2.0	Ø13	Ø21	Ø80	Ø255	17.5	2.0
F3345 Series	2.0	Ø13	Ø21	Ø80	Ø255	17.5	2.0
F4600 Series	2.0	Ø13	Ø21	Ø80	Ø255	17.5	2.0
F4700/F4710 Series	2.0	Ø13	Ø21	Ø80	Ø255	17.5	2.0
RFX250/RFX300	2.0	Ø13	Ø21	Ø80	Ø255	17.5	2.0
FSO Series	2.0	Ø13	Ø21	Ø80	Ø330	25.5	2.0