


Operator
Telephone
Fax
e-Mail

Xp-G Strada-T Road / Luminaire parts list


Ledil Oy C11415_Strada-T-DN-XP-G
C11415_Strada-T-DN-XP-G
Article No.: C11415_Strada-T-DN-XP-G
Luminaire Luminous Flux: 5850 lm
Luminaire Wattage: 45.0 W
Luminaire classification according to CIE: 100
CIE flux code: 40 79 95 100 87
Fitting: 1 x User defined (Correction Factor 1.000).

See our luminaire
catalog for an image of
the luminaire.




Ledil Oy C11425_Strada-T-DW-XP-G
C11425_Strada-T-DW-XP-G
Article No.: C11425_Strada-T-DW-XP-G
Luminaire Luminous Flux: 3900 lm
Luminaire Wattage: 30.0 W
Luminaire classification according to CIE: 100
CIE flux code: 11 45 85 100 102
Fitting: 1 x User defined (Correction Factor 1.000).

See our luminaire
catalog for an image of
the luminaire.



Operator
Telephone
Fax
e-Mail


Xp-G Strada-T Road / False Color Rendering

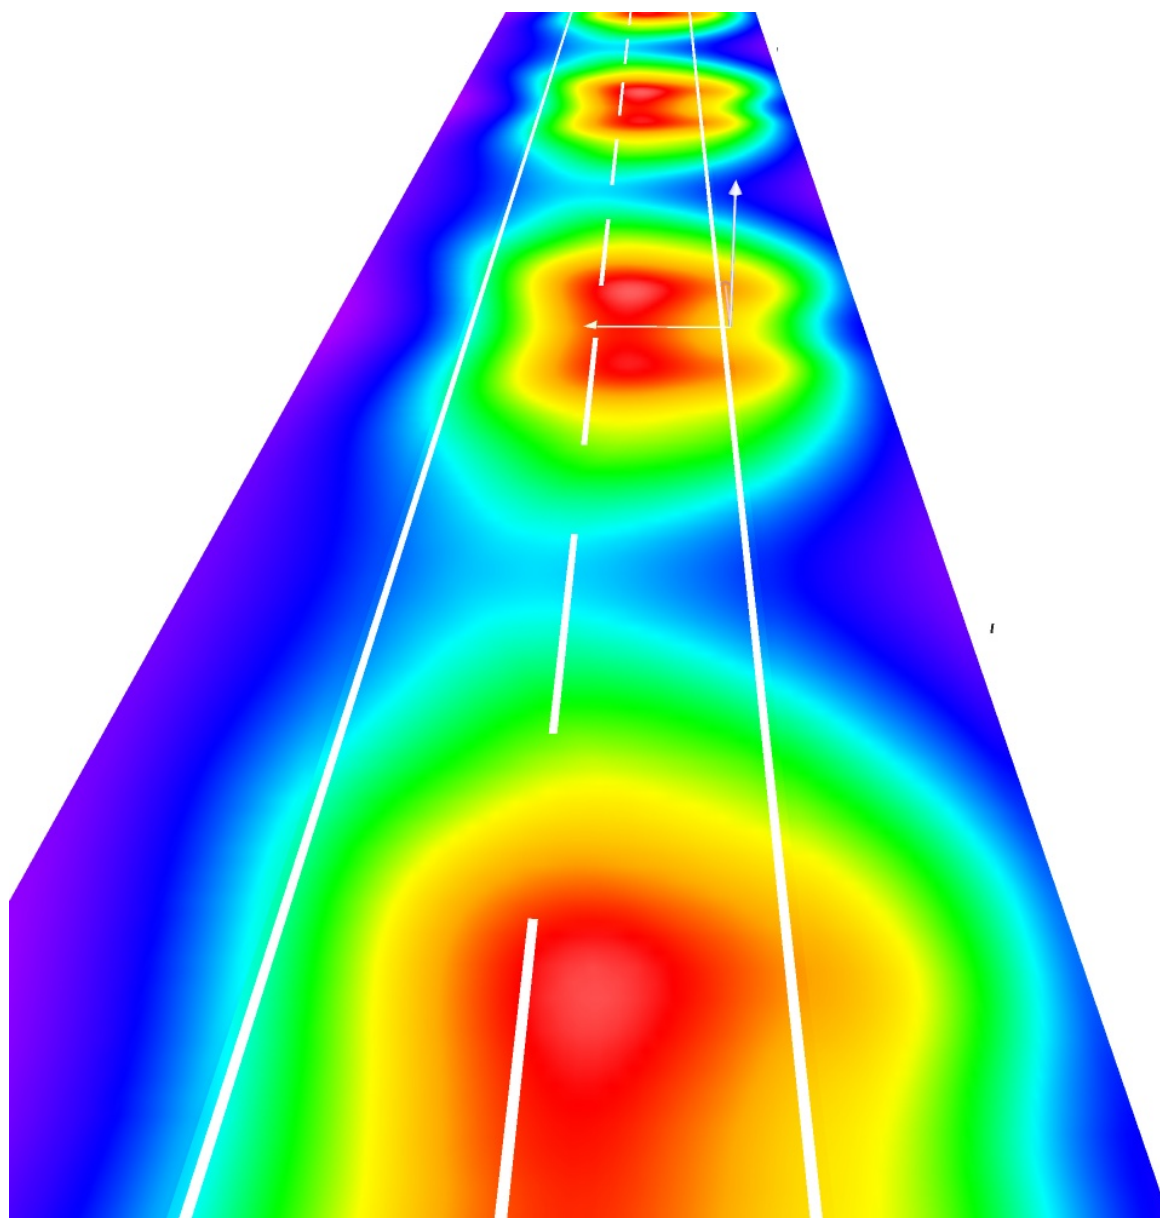

0 3.75 7.50 11.25 15 18.75 22.50 26.25 30 lx

Operator
Telephone
Fax
e-Mail

Xp-G Strada-T Road / Valuation Field Roadway 1 / Results overview

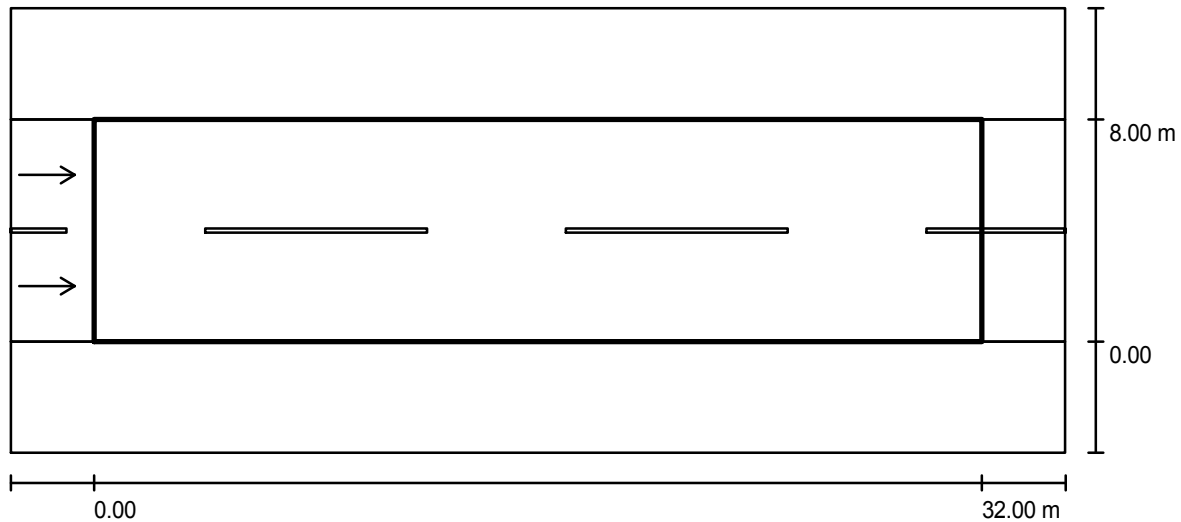

Light loss factor: 1.00

Scale 1:272

Grid: 11 x 6 Points

Accompanying Street Elements: Roadway 1.

tarmac: R2, q0: 0.070

Selected Lighting Class: ME3a

(All lighting performance requirements are met.)

	L_{av} [cd/m ²]	U0	UI	TI [%]	SR
Calculated values:	1.1	0.5	0.7	15	0.6
Required values according to class:	≥ 1.0	≥ 0.4	≥ 0.7	≤ 15	≥ 0.5
Fulfilled/Not fulfilled:	✓	✓	✓	✓	✓

Assigned viewer (2 Pieces):

No.	Observer	Position [m]	L_{av} [cd/m ²]	U0	UI	TI [%]
1	Observer 1	(-60.000, 2.000, 1.500)	1.1	0.6	0.7	15
2	Observer 2	(-60.000, 6.000, 1.500)	1.1	0.5	0.8	10