



Panel hole

For PL●, PK●, PN●, PX● and PT●

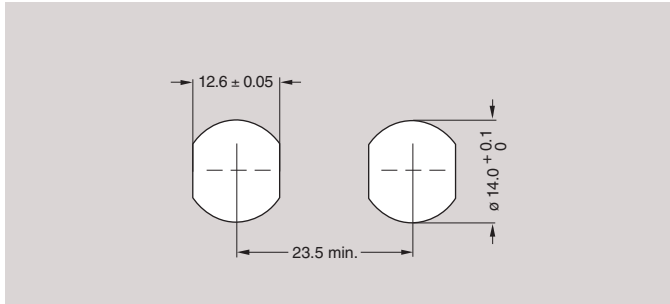










For PM●

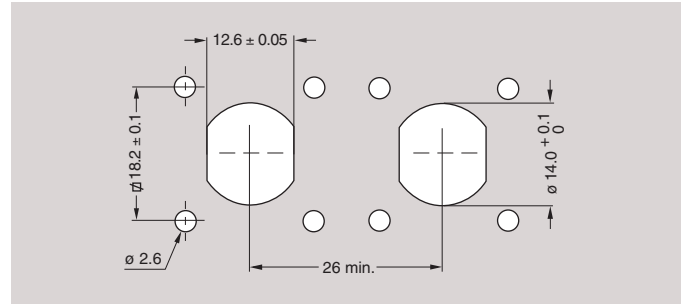

Note: PY* is also designed for snap-on fixing into customer housing. Consult factory for information.
– Socket mounting nut torque = 1.5 Nm.













PCB drilling pattern

For straight contacts

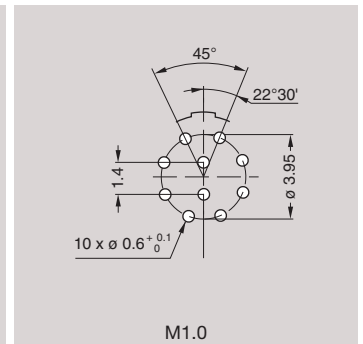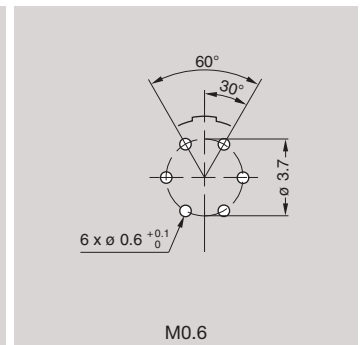

Note: all dimensions are in millimeters

For 90° elbow contacts (A-A view)



For PPG and PXG models

