
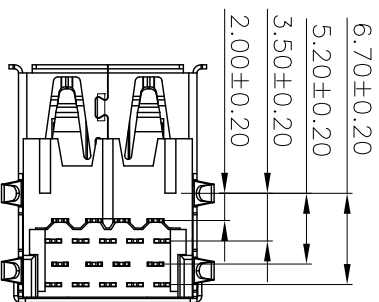
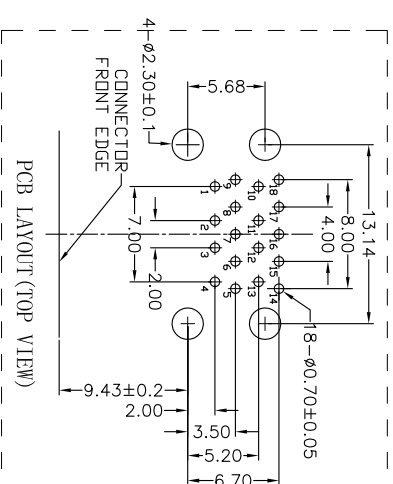


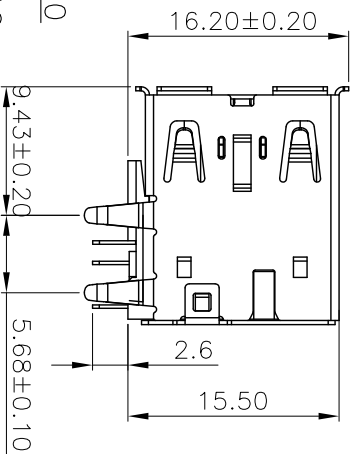
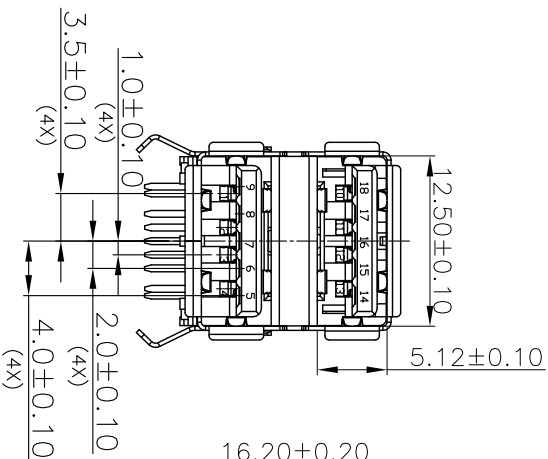


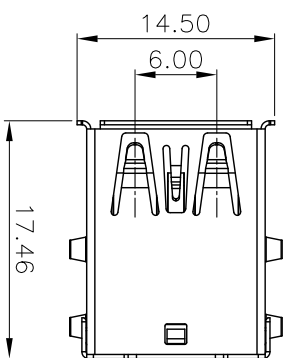

MAPX	MODIFICATION	DATE
------	--------------	------

SPECIFICATIONS:

Contact current Rating:
1.8 Amperes for pin1&pin4.
0.25 Amperes for other contacts

Dielectric Withstanding Voltage:AC 100V(RMS)
Insulation resistance:100Mmegohms Minimum.

Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts

Mechanical Characteristics:
Mating Force:35 Newtons.Maximum
Unmating Force:10 Newtons.Minimum.

MATERIAL:
Housing: PBT+30%GF COLOR:BLUE
8N Min After Durability

Contact: copper alloy(T=0.25mm)

Shell:
Brass

PLATING:
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all

Shell:
Nickel Plated

operating Temperature: -55°to+85°

产品图

深圳市精拓金电子有限公司

公差一览表				单位				制图料号			
TOLERANCE UNLESS OTHERWISE				UNITS				PRODUCT PART NO.			
X.	±0.35	X.	±5°	MM				USB 3.0 AF双层90° DIP			
X.	±0.30	X.	±2°	1:1				产品名称			
XX	±0.20	XX	±1°	日期				角法			
.XXX	±0.10	.XXX	±0.5°	DATE				VER			
				2018-08-12				AD			
				核准							
				APPD							
				黄国荣							
				审核							
				郭治富							
				制图							
				Gavin							