

RoHS

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°c to +105°c

Contact Material:Brass





Contact Plating:Au Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

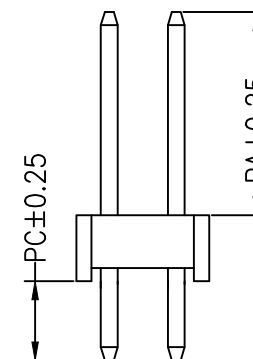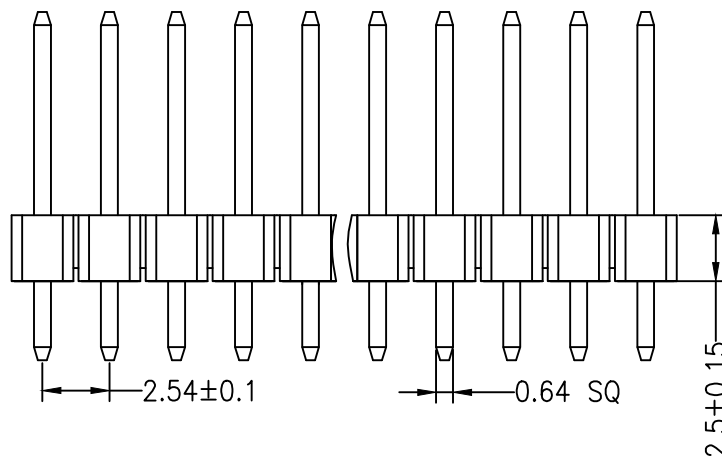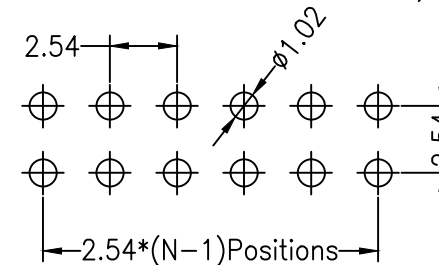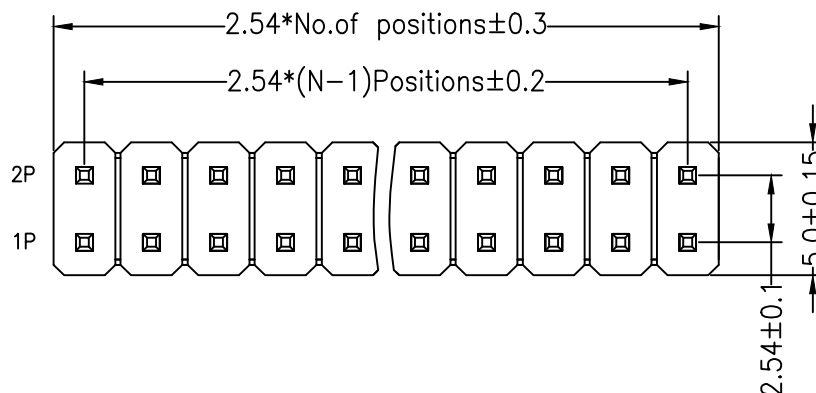

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.00	3.00	11.50
Alternate			

OPERATION

DRAW

SCALE

FIT

深圳市连盛精密连接器有限公司

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3°

APPROVE

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

1/1

PART NO.

PH-00219

TITLE:

2.54PH H2.5mm 2x3P 180°

A0

2012.03.28

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

DIM

TOL

PROJ.

1/1

TITLE:

2.54PH H2.5mm 2x3P 180°