
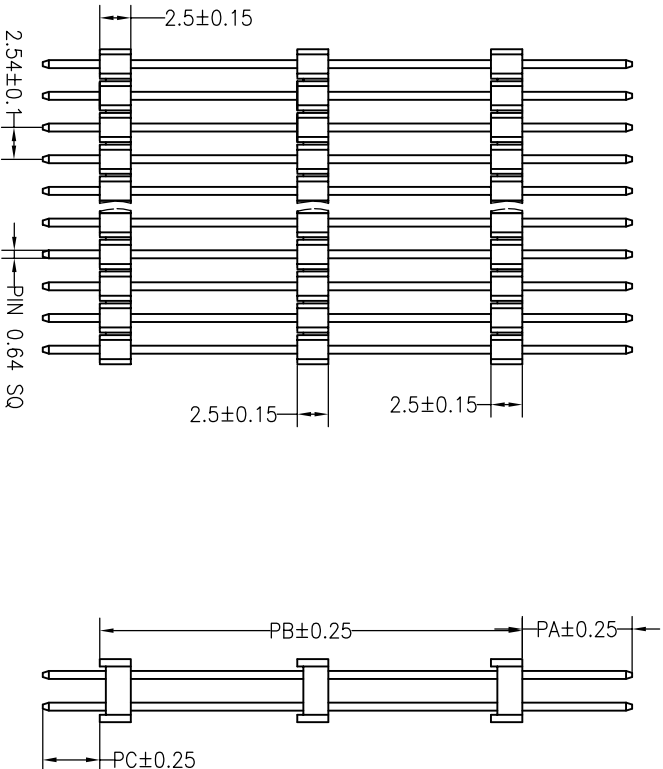
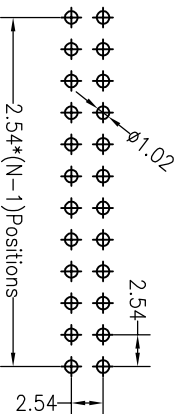


SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40℃ to +105℃

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230℃ for 30−60 seconds
(260℃ for 10 seconds)

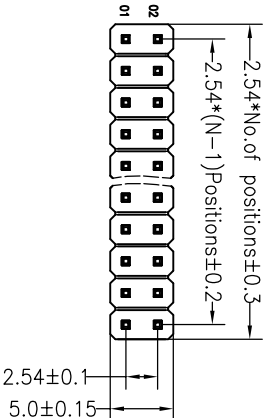

Dimension antitheses list				
ITEM	PA	PC	PB	L
Alternate	6.00	3.00	38.00	47.00

301100203D2SSR002

深圳市连盛精密连接器有限公司

深圳市连盛精密连接器有限公司											
						OPERATION		DRAW		SCALE	
						X.X	±0.30			UNIT	FIT
						CHECK				SIZE	
										A4	
										SHEET	
										1 / 1	
										PROJ.	
											
										TITLE:	
										2.54PH 3H=3X2.5 DIP PA6.0 PB38.0	
										PC3.0 PA6T	

注:中间塑胶居中