

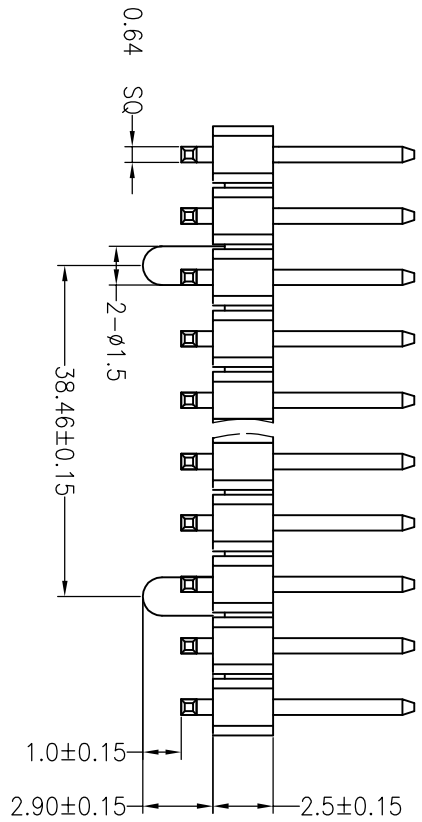
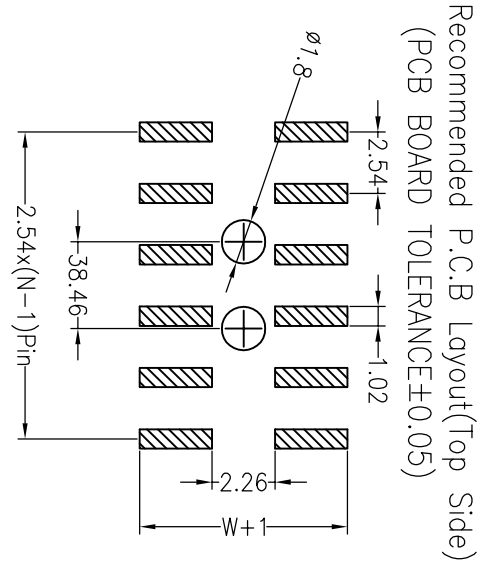


RoHS

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 5 seconds)

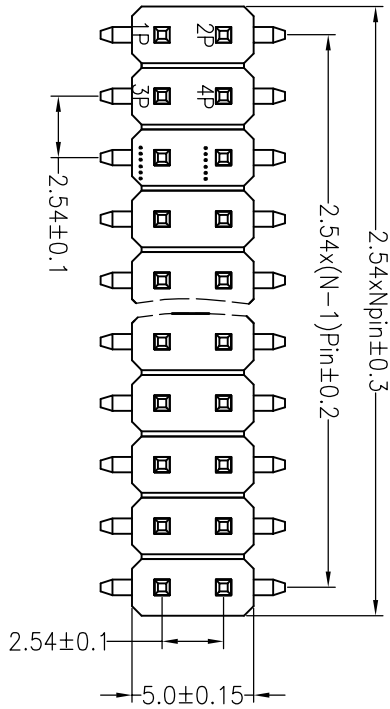

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	6.00	4.44	7.80	12.4
Alternate				

深圳市连盛精密连接器有限公司

深圳市连盛精密连接器有限公司									
		OPERATION		DRAW		SCALE		FIT	
		X.X		±0.30		UNIT		mm	
A1		2017.12.19		NEW DRAWING		CHECK		SIZE	
A0		2012.04.11		NEW DRAWING		X.XXX		±0.10	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		DIM	
								TOL	
						APPROVE			
								</	

2.54Pin H=2.5 2x20pin SMT=7.8 PA6.0 PB4.44
L=12.4 AU0.8U PA6T 带偏柱 直径1.5 高2.9 两柱之间
38.46