





RoHS

SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

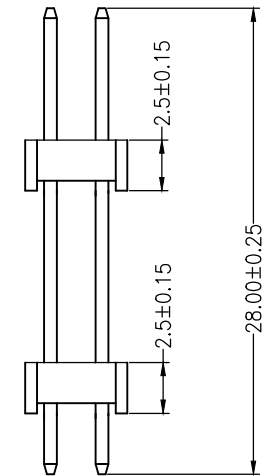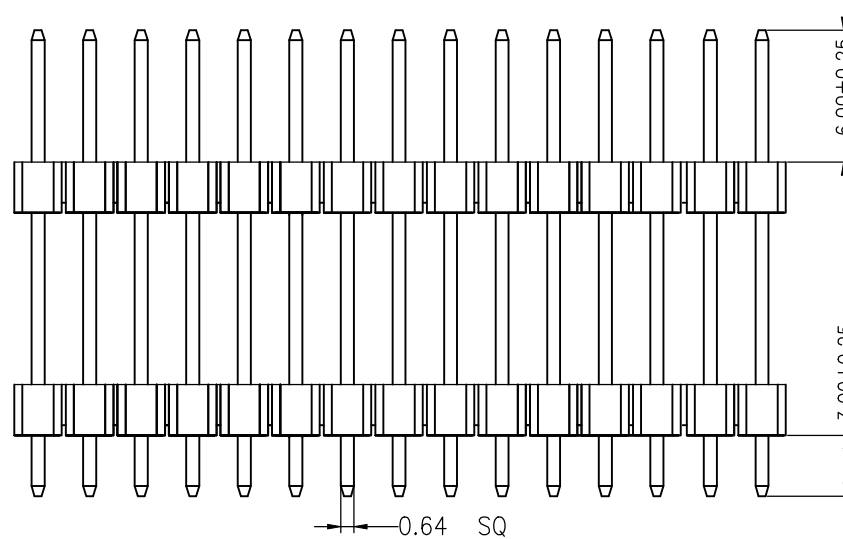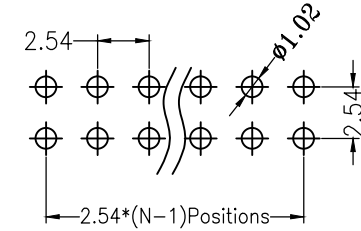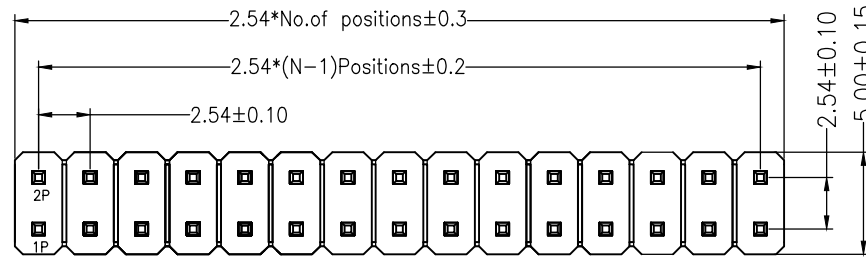

OPERATION

DRAW

SCALE

FIT

深圳市连盛精密连接器有限公司

X.X ±0.30

DRAW

UNIT

mm

X.XX ±0.20

CHECK

SIZE

A4

PART NO.

PH-01016

X.XXX ±0.10

CHECK

SHEET

1/1

TITLE:

2.54PH 2H=2x2.5 2X13P DIP PA6.0
PB19.0 PC3.0 L=28.0 PA6T

Angle ±3°

APPROVE

PROJ.



REV DATE MODIFICATION DESCRIPTION CHANGE

1

2

3

4

5

6

7

8

9