


Rated Current:3.0AMP

Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°c to +105°c

Contact Material: Brass
 Contact Plating: Au3U Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PAgT
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

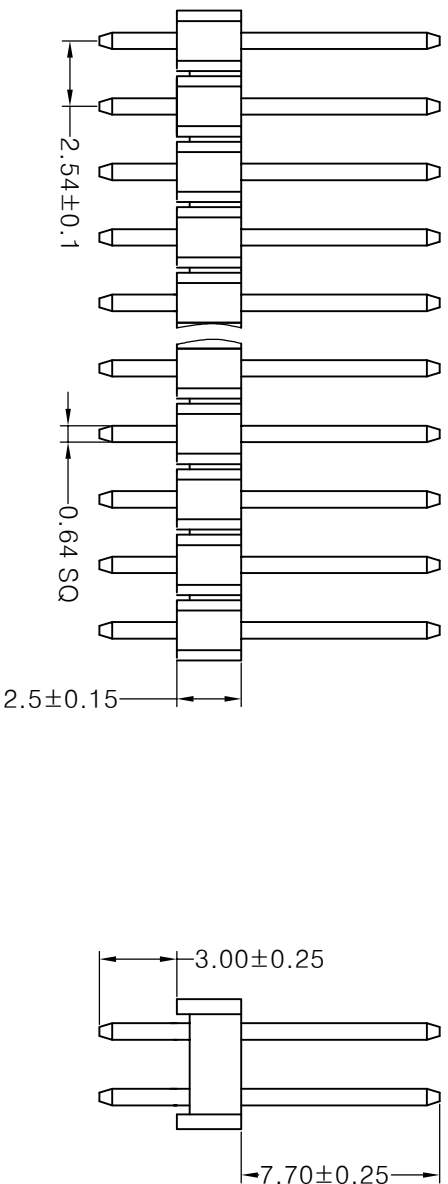

深圳市连盛精密连接器有限公司

PH-00347