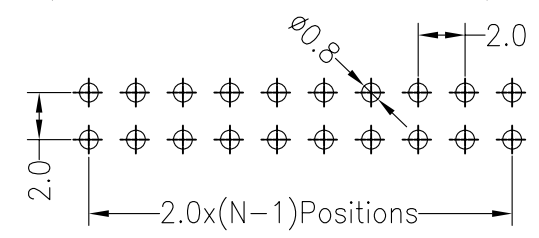
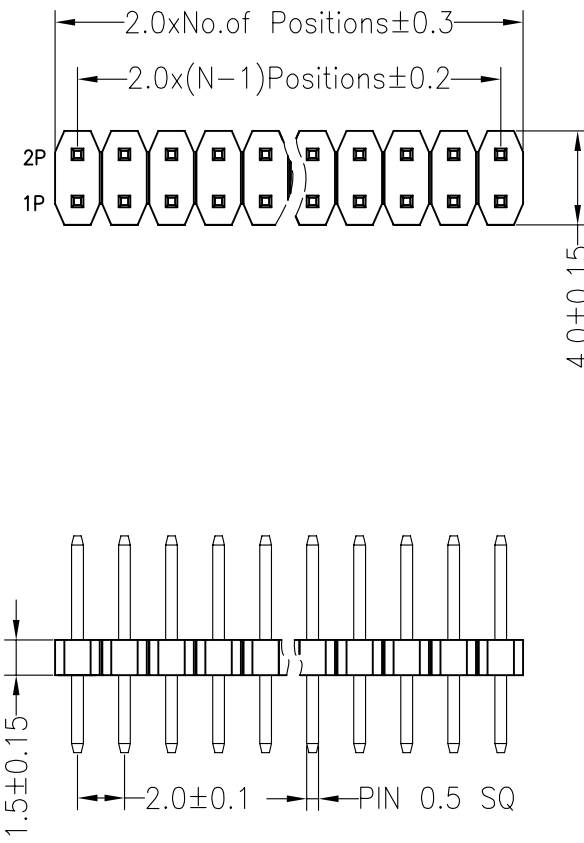
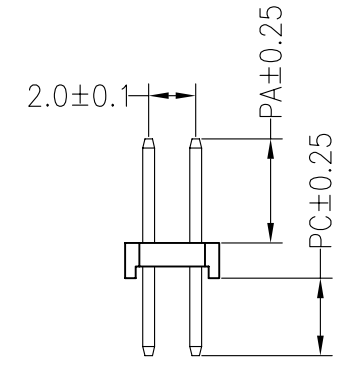


	1	2	3	4	5	6	7	8	9												
G	RoHS									G											
F	SPECIFICATIONS				Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)					F											
E	Rated Current:1.5AMP									E											
D	Contact Resistance:20mΩ Max									D											
C	Withstand Voltage:500V AC/DC									C											
B	Insulation Resistance:1000MΩ Min									B											
A	Operation Temperature:−40℃ to +105℃									A											
Contact Material:Brass																					
Contact Plating:Au Over Ni																					
Insulator Material:Polyester(UL94V−0)																					
Standard: PA6T				<table><tr><th colspan="4">Dimension antitheses list</th></tr><tr><th>ITEM</th><th>PC</th><th>PA</th><th>L</th></tr><tr><td>Alternate</td><td>3.00</td><td>3.00</td><td>7.50</td></tr></table>					Dimension antitheses list				ITEM	PC	PA	L	Alternate	3.00	3.00	7.50	
Dimension antitheses list																					
ITEM	PC	PA	L																		
Alternate	3.00	3.00	7.50																		
Max.Processing Temp: 230℃ for 30−60 seconds (260℃ for 5 seconds)																					
				OPERATION		DRAW		SCALE		FIT		深圳市连盛精密连接器有限公司									
				X.X ±0.30				UNIT		mm											
				X.XX ±0.20		CHECK		SIZE		A4											
A0		2012.04.11		NEW DRAWING				SHEET		1/1				PART NO.		PH-00380					
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		APPROVE		PROJ.		TITLE:		2.0PH 2x10pin H1.5mm 180°							
1		2		3		4		5		6		7		8		9					