
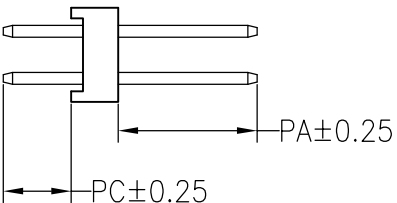
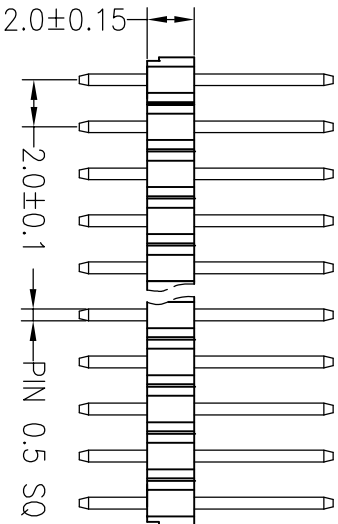
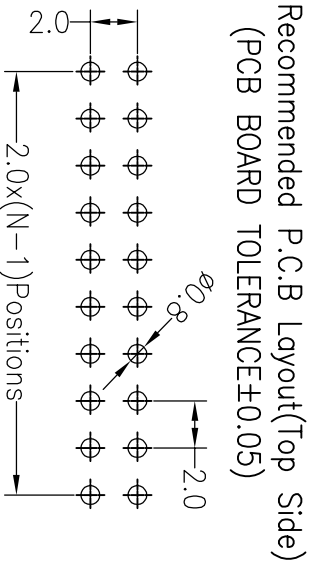


RoHS

SPECIFICATIONS
Rated Current:1.5AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:−40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V−0)
Standard: PA6T
Max.Processing Temp: 230°C for 30−60 seconds
(260°C for 5 seconds)

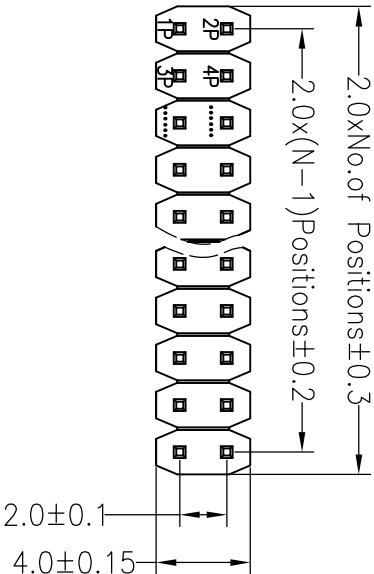

Dimension antitheses list			
ITEM	PC	PA	L
Standard	2.80	4.10	8.90
Alternate			

深圳市连盛精密连接器有限公司

1	2	3	4	5	6	7	8	9
G								
SPECIFICATIONS Rated Current:1.5AMP Contact Resistance:20mΩ Max Withstand Voltage:500V AC/DC Insulation Resistance:1000MΩ Min Operation Temperature:−40°c to +105°c Contact Material:Brass Contact Plating:Au Over Ni Insulator Material:Polyester(UL94V−0) Standard: PA6T Max.Processing Temp: 230°C for 30−60 seconds (260°C for 5 seconds)								
F								
E								
D								
C								
B								
A								
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	APPROVE	
1	2	3	4	5	6	7	8	9
				OPERATION		DRAW		
				X.X	±0.30			
				X.XX	±0.20	CHECK		
				X.XXX	±0.10			
				Angle	±3°			
				DIM	TOL	APPROVE		
				SCALE	FIT			
				UNIT	mm			
				SIZE	A4			
				SHEET	1/1			
				PROJ.	1/1			
				PART NO.		PH-00847		
				TITLE:		2.0PH H=2.0 2X7P DIP PA4.1 PC2.8 L=8.9 AU PA6T		
				8		9		