

1	2	3	4	5	6	7	8	9
RoHS								
Recommended P.C.B Layout(Top Side)								

Dataset: Z OAMBD

Contact Resistance: 20mΩ Max

Withstand Voltage:1000V AC/DC



Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass

Insulator Material: Polyester (UL94V-0)

Max.Processing Temp: 180°C for 30–60 seconds

Downloaded from <http://ajphaphysocpharm.sagepub.com/> at 11:01 11 November 2014

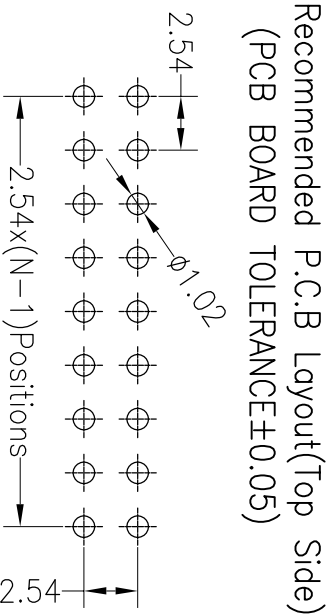

深圳市连盛精密连接器有限公司																	
		SCALE		FIT		PART NO. FH-00020											
		UNIT		mm													
		SIZE		A4													
		SHEET		1/1		TITLE: 2.54FH H8.5 2x5pin 180° W5.0mm											
		PROJ.															
1		2		3		4		5		6		7		8		9	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		APPROVE									
A0		2012.03.28		NEW DRAWING				CHECK									
								X.XX ±0.20									
								X.XXX ±0.10									
								Angle ±3°									
								DIM TOL									
								DRAW									
								OPERATION									
								X.X ±0.30									