




MU-101-ACW
W5.25xD7.40xH2.35

PIN数(Number of contacts)：5PIN	插座类型(Socket type)：MICRO USB
插座类别(Socket category)：母座/Mother seat	操作方式(Operation mode)：卧式/Horizontal
温度范围(Operating temp)：-20℃ TO +70℃	操作寿命(Operation life)：5,000 Cycles Min
额定负荷(Rated load)：DC 30V 1.0A	焊接方式(Welding mode)：贴片式/SMT
接触电阻(Contact resistance)：≤50mΩ	包装方式(Packaging method)：卷带/Tape&Reel(TR)
绝缘电阻(Insulation resistance)：≥100MΩ	最小包装(Minimum packing)：1,500/PCS


外形尺寸 (UNIT:MM) / Size Chart

www.xunpudianzi.com

更多资料请参考技术选型档！

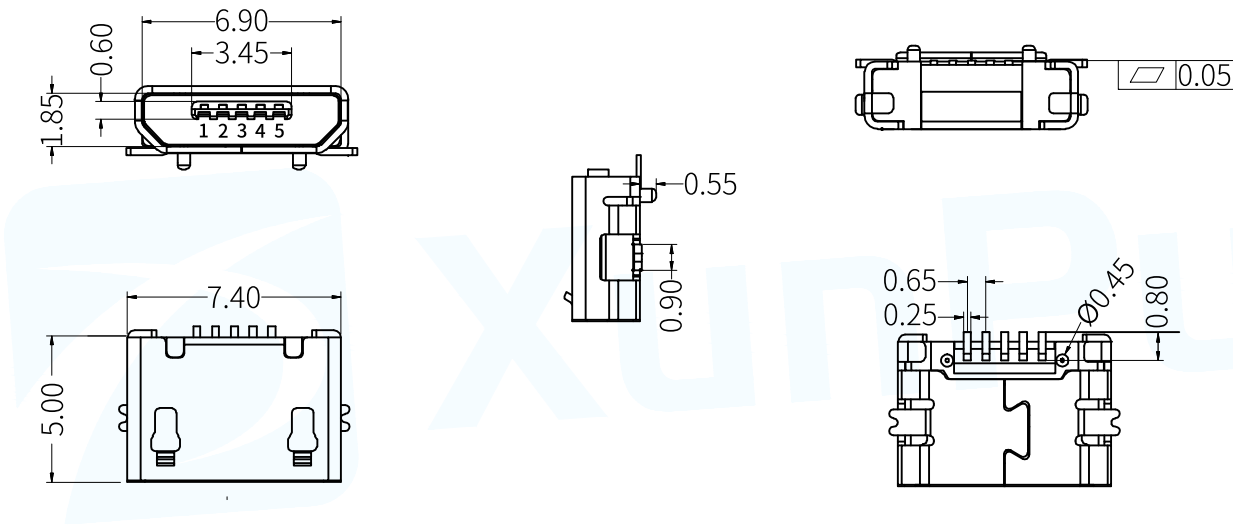

线路板安装 (UNIT:MM) / Mounting Dimensions

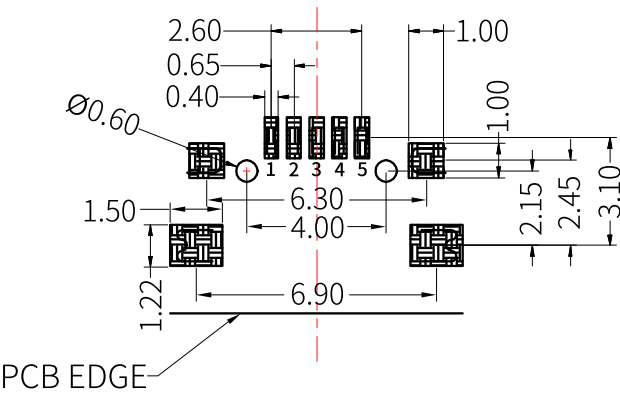


P.C.B LAYOUT(copper-side view)

引脚定义/Pin Definition

PIN	Signal Name	Describe
1	VBUS	+5V
2	D-	Neegative Data Channel
3	D+	Positive Data Channel
4	ID	OTG
5	GND	Ground

● 回流焊/Reflow soldering

适用表面贴装型产品/Applicable to surface mount products
温度分布/Temperature distribution

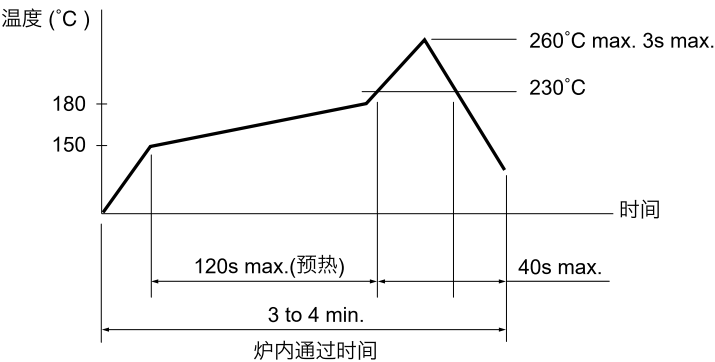

注:

- 1. 加热方式:以远红外线上下加热方式。
- 2. 温度测量:用Φ0.1~0.2 的 CA(K)或 CC(T)测量位置在焊接连接部(锡/铜箔面)。
- 3. 固定方式:采用耐热胶带。

● 手焊式/Hand welding

项目/Project	条件/condition
焊接温度 Welding temperature	350°C max.
持续焊接时间 Continuous welding time	3s max.
焊剂斗容量 Flux bucket capacity	60W max.

● 浸焊式/Immersion soldering

项目/Project	条件/condition
助焊剂附着量 Flux adhesion	不附着于零部件贴装面的程度 Not attached to the mounting surface of components
预热温度 Preheating temperature	印刷电路板焊接面的周围温度 100°C max. The temperature around the welding surface of PCB is 100 °C max
预热温度时间 Preheat temperature time	60s max.
焊接温度 welding temperature	260°C max.
焊接浸渍时间 Welding immersion time	5s max.
焊接次数 Welding times	2 times max.