

Features

- HIGH GAIN BANDWIDTH:1.1MHz
- RAIL-TO-RAIL INPUT AND OUTPUT 0.8mV
Typical V_{OS}
- INPUT VOLTAGE RANGE: -0.1V to +5.6V
with $V_S = 5.5V$
- SUPPLY RANGE: +2.5V to +5.5V
- SHUTDOWN: CBMV321S/CBMV358S
- SPECIFIED UP TO +125°C
- MicroSIZE PACKAGES: SOT23-5, SOT23-6

Application

- SENSORS
- PHOTODIODE AMPLIFICATION
- ACTIVE FILTERS
- TEST EQUIPMENT
- DRIVING A/D CONVERTERS

Description


The CBMV321, CBMV358, CBMV324, CBMV321S, CBMV358S families of products offer low voltage operation and rail-to-rail input and output, as well as excellent speed/power consumption ratio, providing an excellent bandwidth (1.1MHz) and slew rate of 0.5V/us. The op-amps are unity gain stable and feature an ultra-low input bias current.

The devices are ideal for sensor interfaces, active filters and portable applications. The CBMV321S, CBMV358S include a shutdown mode. Under logic control, the amplifiers can be switched from normal operation to a standby current that is less than 1uA. The CBMV321, CBMV358, CBMV324, CBMV321S, CBMV358S families of operational amplifiers are specified at the full temperature range of -40°C to +125°C under single or dual power supplies of 2.5V to 5.5V.


CATALOG

| | |
|---|----|
| Features..... | |
| Application | |
| Description..... | |
| Pin Configurations..... | 1 |
| Electrical Characteristics | 3 |
| Typical Characteristics..... | 6 |
| Application Notes | 8 |
| CBMV321S/CBMV358S ENABLE FUNCTION | 8 |
| Layout Guidelines..... | 9 |
| Instrumentation Amplifier | 9 |
| Package Outline Dimensions..... | 10 |
| SOT23-5 | 10 |
| SOT23-6 | 11 |
| MSOP-8..... | 12 |
| MSOP-10..... | 13 |
| TSSOP-14..... | 14 |
| SOIC-8(SOP8)..... | 15 |
| SOIC-14(SOP14)..... | 16 |
| Package/Ordering Information | 17 |


Pin Configurations

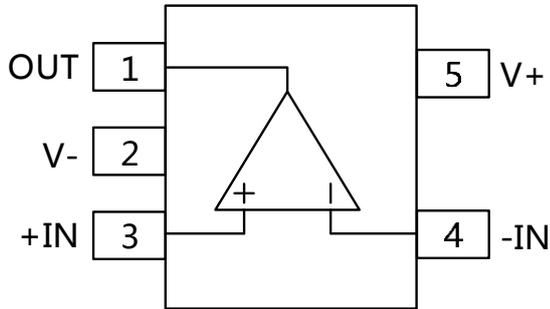


SOT23-5

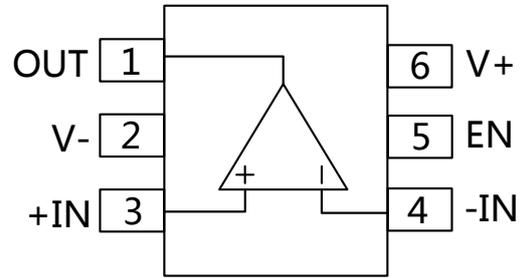


SOT23-6

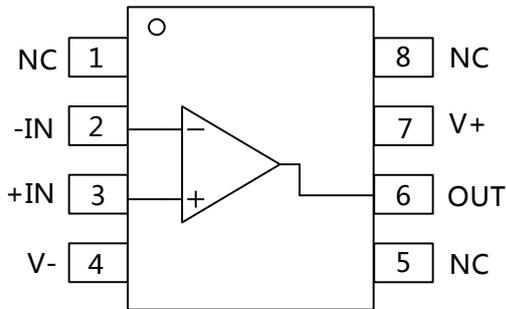


SOIC-8(SOP8) , MSOP-8

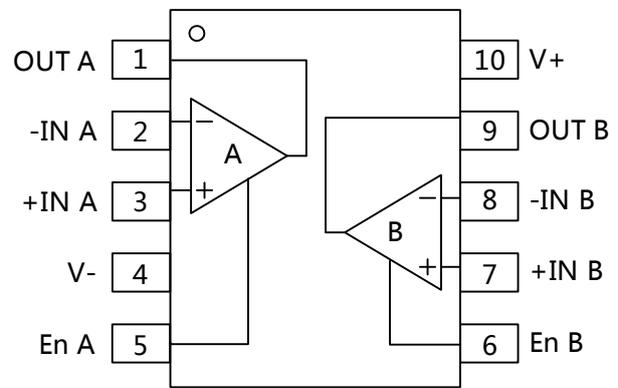


MSOP-10

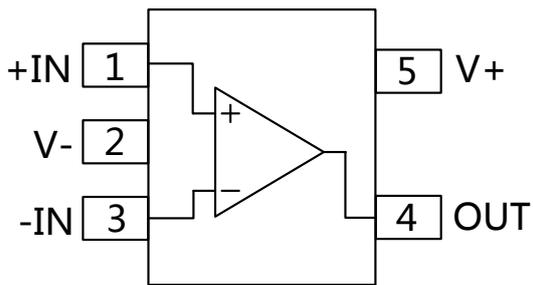


SOT23-5

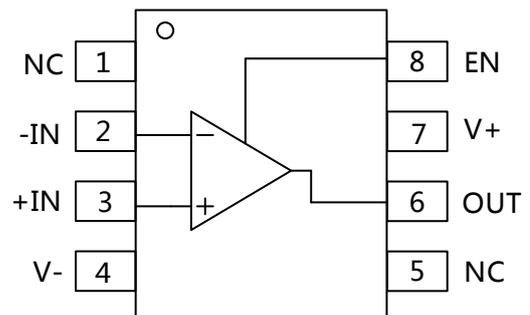

SOIC-8(SOP8)

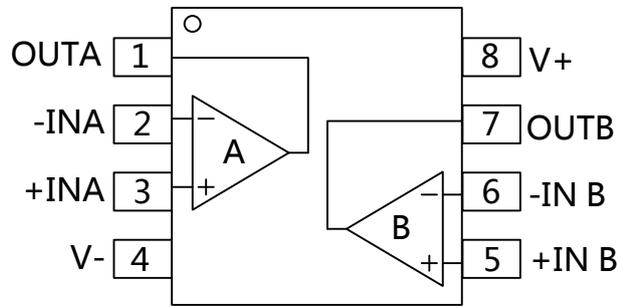

SOIC-8(SOP8),MSOP-8

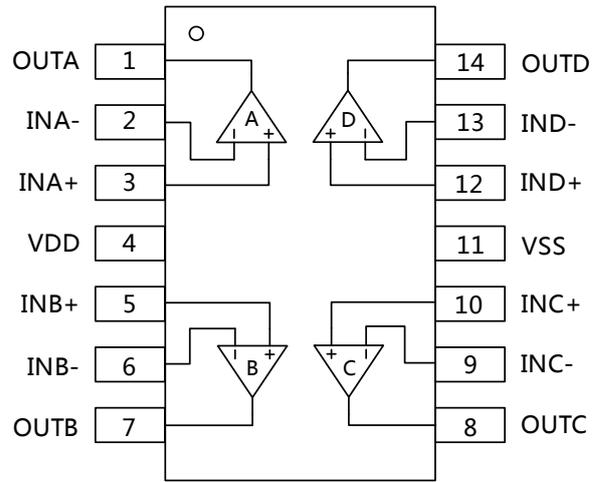

SOIC-14(SOP14),TSSOP-14

Electrical Characteristics

- Supply Voltage, V+ to V- 7.0V
- Input Terminals, Voltage ⁽²⁾ - 0.5 to (V+) + 0.5V
 Current ⁽²⁾ ±10mA
- Storage Temperature -65°C to +150°C
- Operating Temperature -40°C to +125°C
- Junction Temperature 150°C
- Package Thermal Resistance @ TA= +25°C
- SOT23-5, SOT23-6 200°C/W
- MSOP-10, SOIC-8, TSSOP-8 150°C/W
- SOIC-14, TSSOP-14 100°C/W
- Lead Temperature (Soldering, 10s) 260°C ESD Susceptibility
- HBM 5000V
- MM 400V

1.Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

2.Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5V beyond the supply rails should be current-limited to 10mA or less.



ESD SENSITIVITY CAUTION

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

Electrical Characteristics







(At TA = +25°C, Vs=5V, RL = 10kΩ connected to VS/2, and VOUT = VS/2, unless otherwise noted.)

| PARAMETER | | CONDITIONS | T _J | CBM8541, CBM8542, CBM8544 | | | UNIT |
|---------------------|------------------------------------|-----------------------------------|----------------|------------------------------|-----|-----|-------|
| | | | | MIN | TYP | MAX | |
| POWER SUPPLY | | | | | | | |
| Vs | Operating Voltage Range | | 25°C | 2.5 | | 5.5 | V |
| IQ | Quiescent Current/Amplifier | | 25°C | | 60 | 80 | uA |
| PSRR | Power-Supply Rejection Ratio | Vs=2.5V to 5.5V, Vcm=(V-)+0.5V | 25°C | 62 | 85 | | dB |
| | | | -40°C to 125°C | 58 | | | |
| INPUT | | | | | | | |
| Vos | Input Offset Voltage | | 25°C | | 0.8 | 4.5 | mV |
| Vos TC | Input Offset Voltage Average Drift | -40°C to 125°C | | | 2.9 | | uV/°C |
| IB | Input Bias Current | | 25°C | | 1 | 10 | pA |
| Ios | Input Offset Current | | 25°C | | 1 | 10 | pA |
| Vcm | Common-Mode Voltage Range | Vs= 5.5V | 25°C | -0.1 | | 5.6 | V |
| CMRR | Common-Mode Rejection Ratio | Vs= 5.5V, Vcm=-0.1V to 4V | 25°C | 65 | 80 | | dB |
| | | | -40°C to 125°C | 62 | | | |
| | | Vs= 5.5V, Vcm=-0.1V to 5.6V | 25°C | 57 | 75 | | |
| | | | -40°C to 125°C | 55 | | | |
| OUTPUT | | | | | | | |
| AOL | Open-Loop Voltage Gain | RL=2KΩ, Vo=0.15V to 4.85V | 25°C | 75 | 95 | | dB |
| | | | -40°C to 125°C | 72 | | | |
| | | RL=10KΩ, Vo=0.05V to 4.95V | 25°C | 85 | 100 | | |
| | | | -40°C to 125°C | 82 | | | |
| | Output Swing From Rail | RL=2KΩ | 25°C | | 26 | | mV |
| | | RL=10KΩ | | | 8 | | |
| Iout | Output Short-Circuit Current | | 25°C | | 54 | | mA |

| FREQUENCY RESPONSE | | | | | | | |
|----------------------------------|-----------------------------|------------------------------|------|--------|-----|----------|----------------|
| SR | Slew Rate | | 25°C | | 0.5 | | V/us |
| GBP | Gain-Bandwidth Product | | 25°C | | 1.1 | | MHz |
| PM | Phase Margin | | 25°C | | 64 | | ° |
| ts | Setting Time,0.1% | | | | 1.3 | | us |
| | Overload Recovery Time | $V_{IN} \cdot Gain \geq V_s$ | | | 2.3 | | us |
| NOISE | | | | | | | |
| en | Input Voltage Noise Density | f = 1KHz | 25°C | | 23 | | nV/\sqrt{Hz} |
| | | f = 10KHz | 25°C | | 20 | | nV/\sqrt{Hz} |
| ENABLE/SHUTDOWN(CBM8541,CBM8542) | | | | | | | |
| $I_{Q(OFF)}$ | Supply Current in Shutdown | | 25°C | | <1 | | uA |
| t_{OFF} | | | 25°C | | 3 | | us |
| t_{ON} | | | 25°C | | 20 | | us |
| V_L | Shut Down | | 25°C | V- | | (V-)+0.8 | V |
| V_H | Amplifier Is Active | | 25°C | (V-)+2 | | V+ | V |







Typical Characteristics

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ connected to $V_S/2$, $V_{OUT} = V_S/2$, unless otherwise noted.

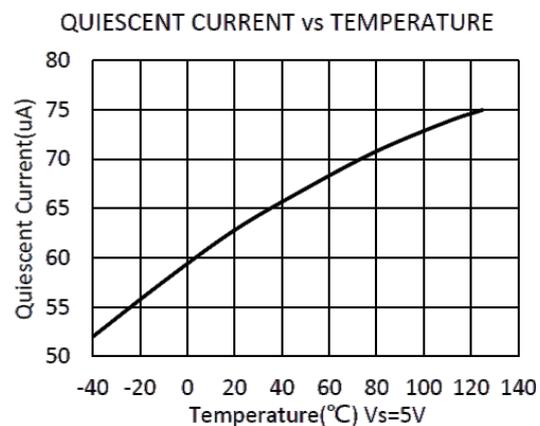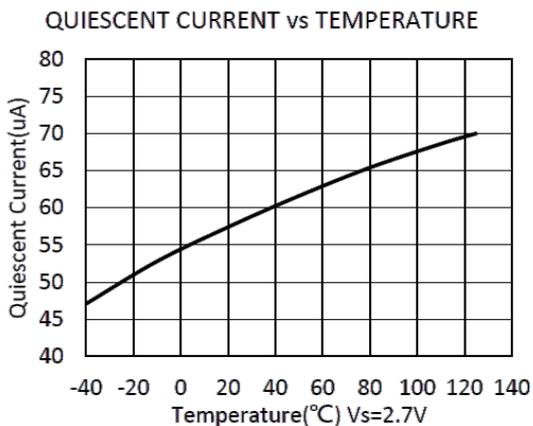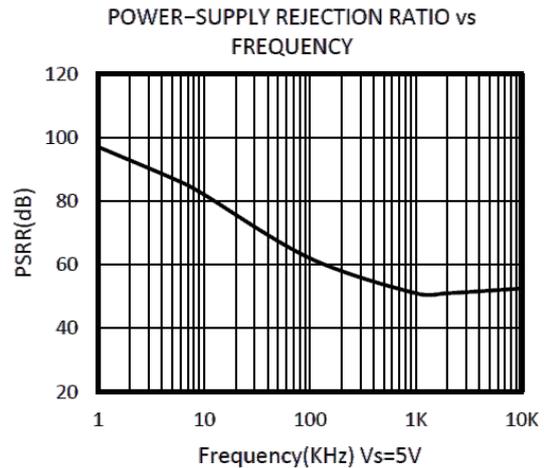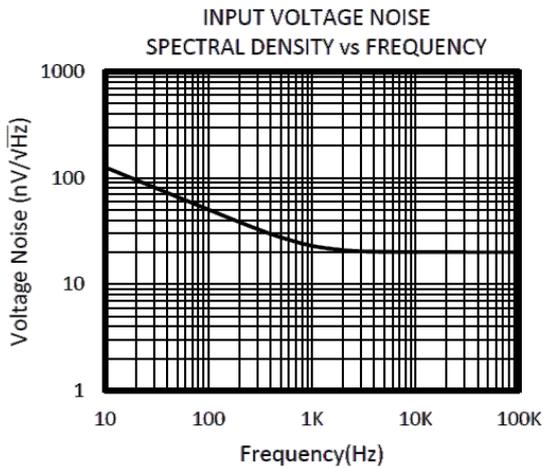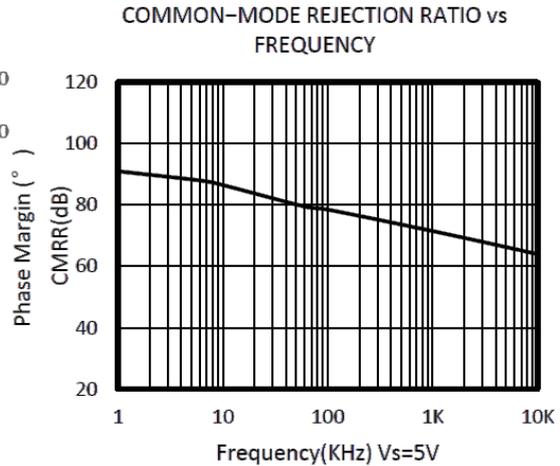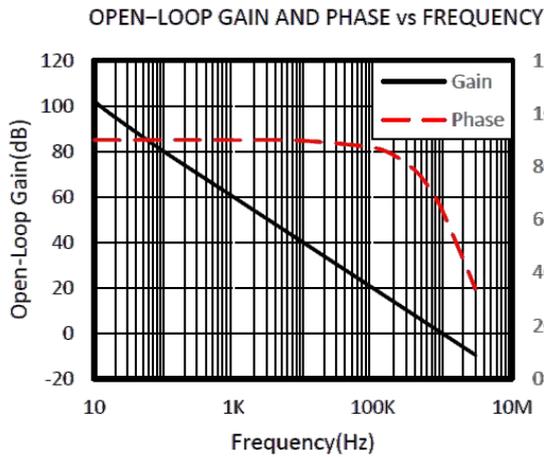



Typical Characteristics

AT $T_A = +25^\circ\text{C}$ $V_S = 5\text{V}$, $R_L = 10\text{ k}\Omega$ connected to $V_S/2$ and $V_{OUT} = V_S/2$, unless otherwise noted.

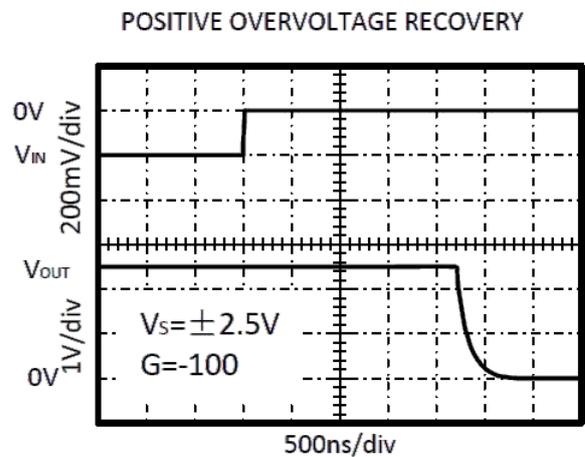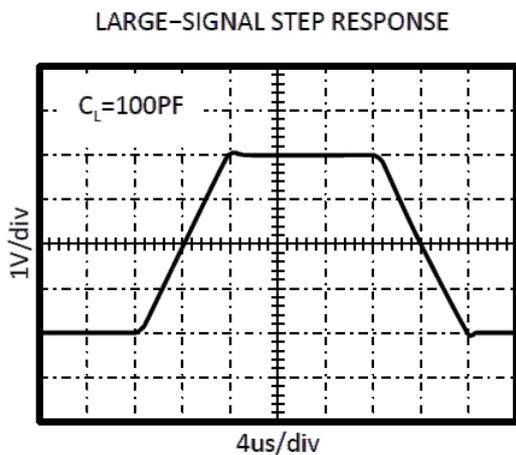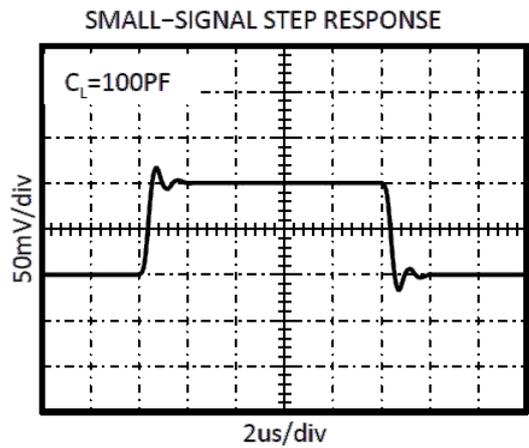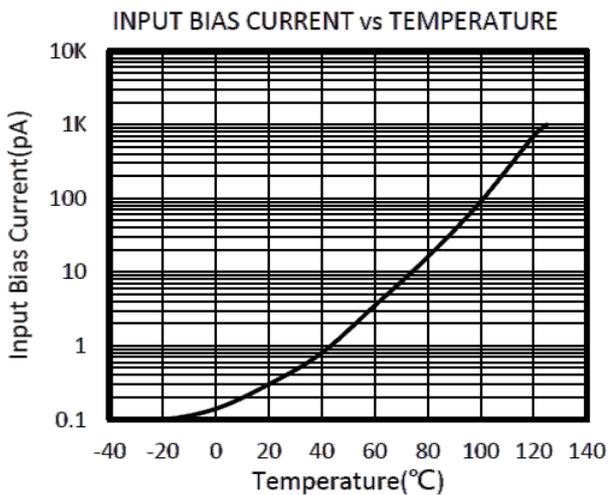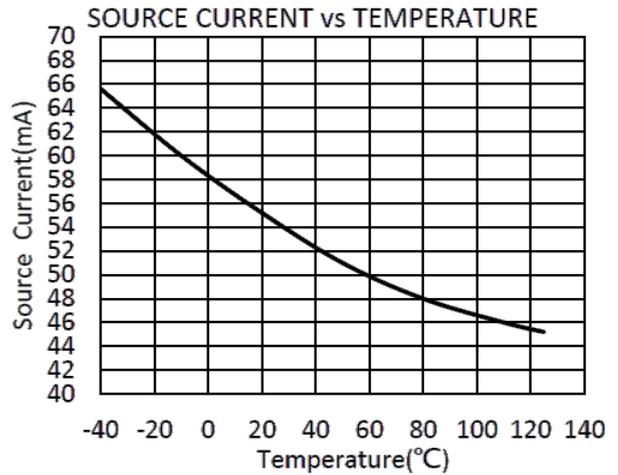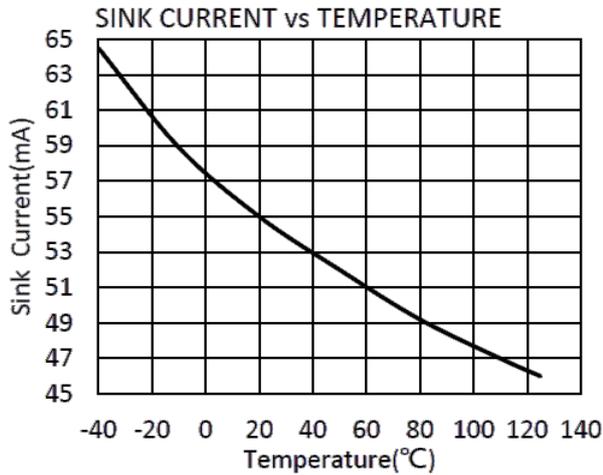

Typical Characteristics

At $T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $R_L = 10\text{k}\Omega$ connected to $V_S/2$, $V_{OUT} = V_S/2$, unless otherwise noted.

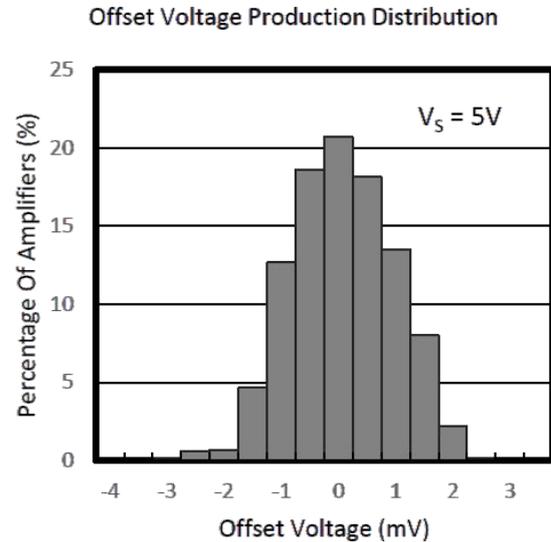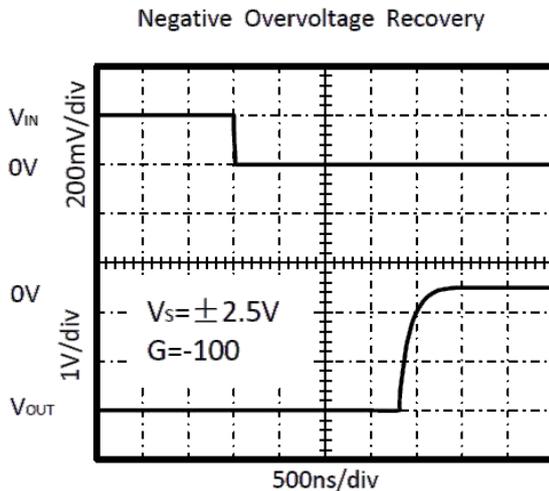

Application Notes

The CBMV321, CBMV358, CBMV324, CBMV321S, CBMV358S are high precision, rail-to-rail operational amplifiers that can be run from a single-supply voltage 2.5V to 5.5V ($\pm 1.25\text{V}$ to $\pm 2.75\text{V}$). Supply voltages higher than 7V (absolute maximum) can permanently damage the amplifier.

Rail-to-rail input and output swing significantly increases dynamic range, especially in low-supply applications.

Good layout practice mandates use of a 0.1 μF capacitor place closely across the supply pins.

CBMV321S/CBMV358S ENABLE FUNCTION

The CBMV321S/CBMV358S includes a shutdown mode. Under logic control, the amplifiers can be switched from normal mode to a standby current of 1 μA . When the Enable pin is connected to high, the amplifier is active. Connecting Enable low disables the amplifier, and places the amplifier, and place the output in a high-impedance state.

Layout Guidelines

Attention to good layout practices is always recommended. Keep traces short. When possible, use a PCB ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1 μ F capacitor closely across the supply pins.

These guidelines should be applied throughout the analog circuit to improve performance and provide benefits such as reducing the EMI susceptibility.

Instrumentation Amplifier

In the three-op amp, instrumentation amplifier configuration shown in Figure2.

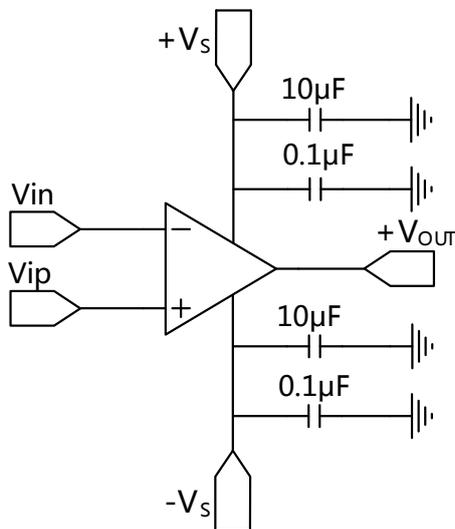


Figure 1. Amplifier with Bypass Capacitors



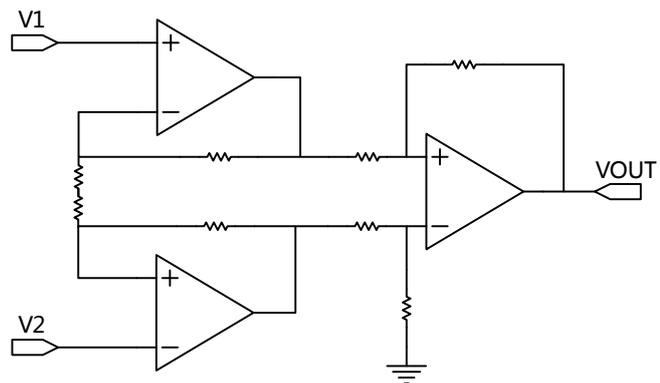




Figure2. Amplifier instrumentation amplifier

Package Outline Dimensions

SOT23-5

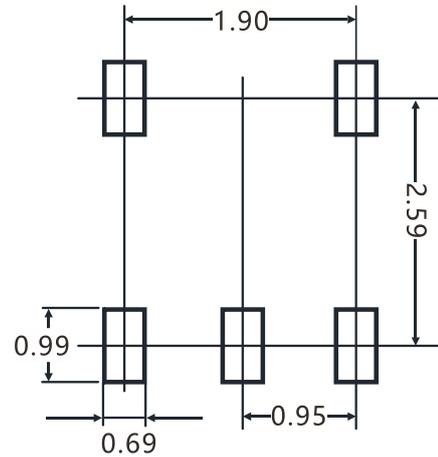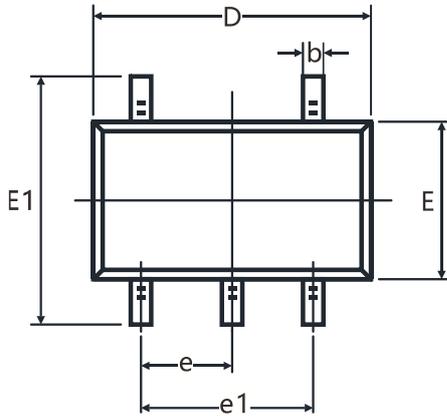


RECOMMENDED LAND PATTERN(Unit:mm)

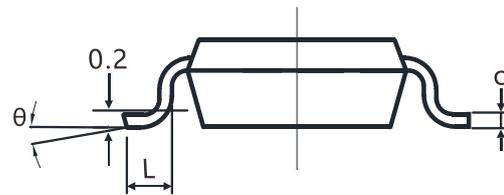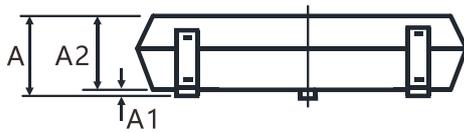



| Symbol | Dimensions In Millimeters | | Dimensions Inches | |
|----------|---------------------------|-------|-------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950 BSC | | 0.037 BSC | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

SOT23-6


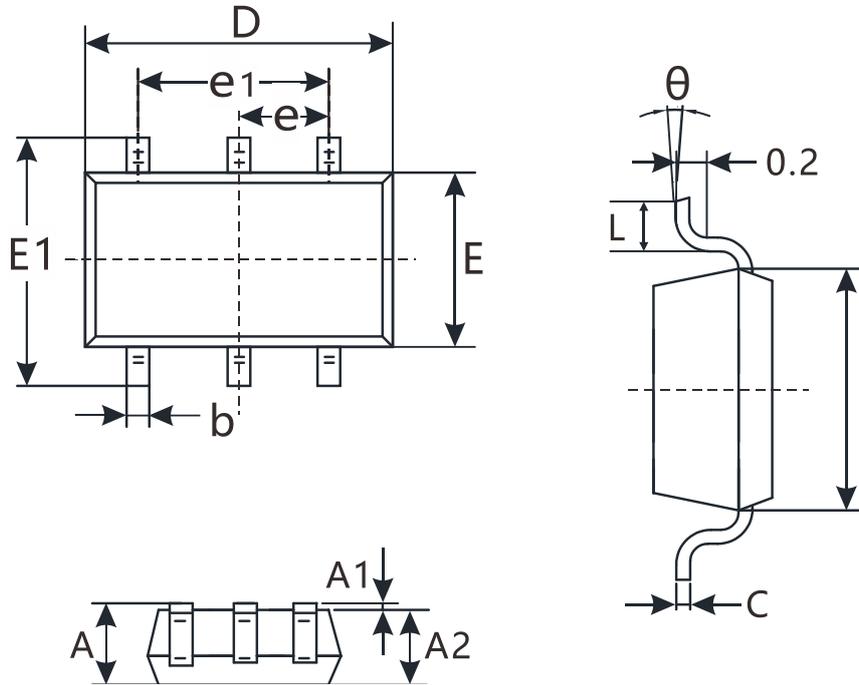


| Symbol | Dimensions In Millimeters | | Dimensions Inches | |
|-----------|---------------------------|-----------|-------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| C | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950 BSC | | 0.037 BSC | |
| e1 | 1.900 BSC | 0.075 BSC | | |
| L | 0.300 | | 0.600 | |
| θ | 0° | 8° | 0° | 8° |

MSOP-8

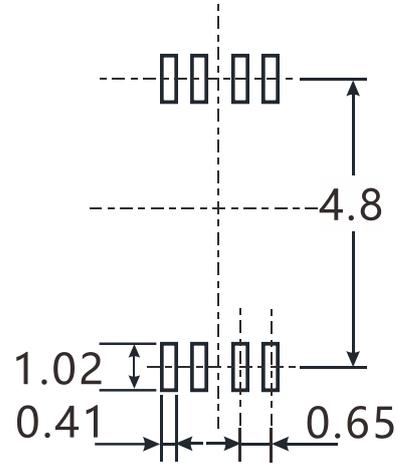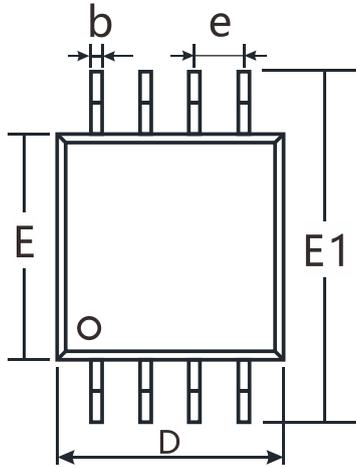


RECOMMENDED LAND PATTERN(Unit:mm)

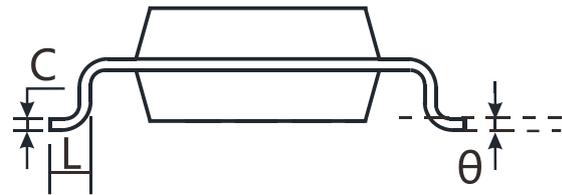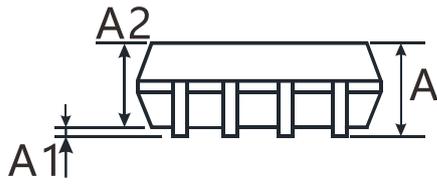


| Symbol | Dimensions In Millimeters | | Dimensions Inches | |
|----------|---------------------------|-------|-------------------|-------|
| | Min | Max | Min | Max |
| A | 0.820 | 1.100 | 0.032 | 0.043 |
| A1 | 0.020 | 0.150 | 0.001 | 0.006 |
| A2 | 0.750 | 0.950 | 0.030 | 0.037 |
| b | 0.250 | 0.380 | 0.010 | 0.015 |
| c | 0.090 | 0.230 | 0.004 | 0.009 |
| D | 2.900 | 3.100 | 0.114 | 0.122 |
| E | 2.900 | 3.100 | 0.114 | 0.122 |
| E1 | 4.750 | 5.050 | 0.187 | 0.199 |
| e | 0.650 BSC | | 0.026 BSC | |
| L | 0.400 | 0.800 | 0.016 | 0.031 |
| θ | 0° | 6° | 0° | 6° |

MSOP-10


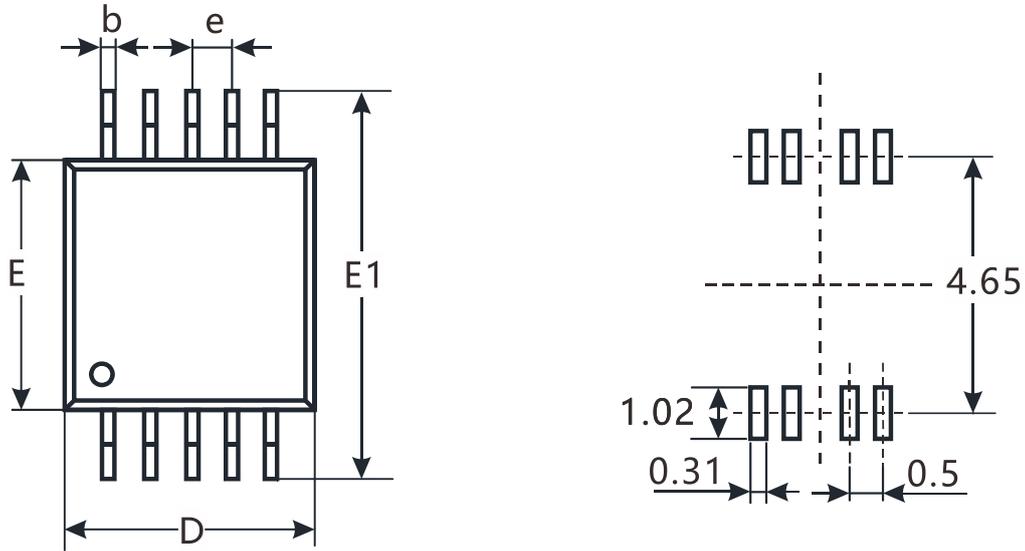


RECOMMENDED LAND PATTERN(Unit:mm)


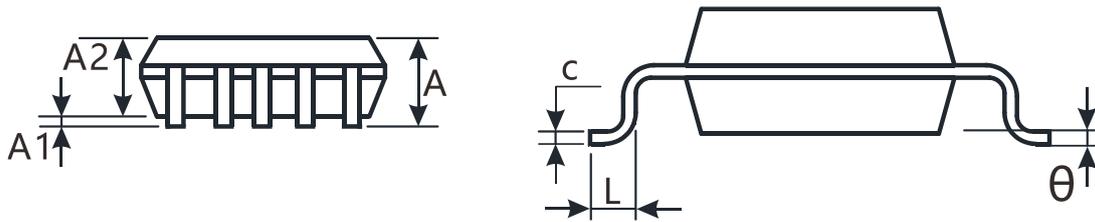


| Symbol | Dimensions In Millimeters | | Dimensions Inches | |
|-----------|---------------------------|-------|-------------------|--------------|
| | Min | Max | Min | Max |
| A | 0.820 | 1.100 | 0.032 | 0.043 |
| A1 | 0.020 | 0.150 | 0.001 | 0.006 |
| A2 | 0.750 | 0.950 | 0.030 | 0.037 |
| b | 0.180 | 0.280 | 0.007 | 0.011 |
| c | 0.090 | 0.230 | 0.004 | 0.009 |
| D | 2.900 | 3.100 | 0.114 | 0.122 |
| E | 2.900 | 3.100 | 0.114 | 0.122 |
| E1 | 4.750 | 5.050 | 0.187 | 0.199 |
| e | 0.50 BSC | | 0.020 BSC | |
| L | 0.400 | 0.800 | 0.016 | 0.031 |
| θ | 0° | 6° | 0° | 6° |

TSSOP-14

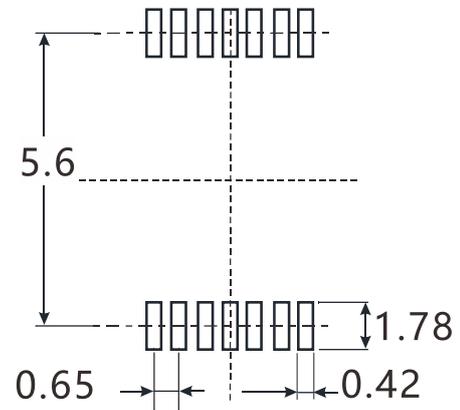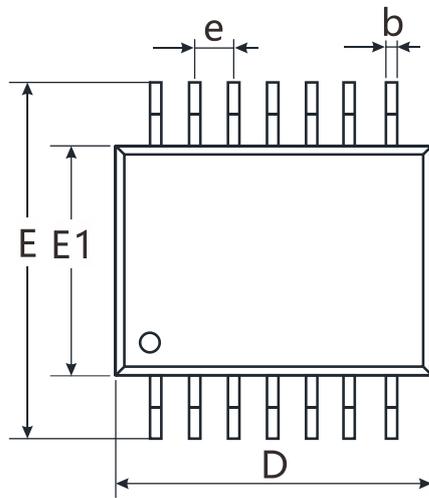


RECOMMENDED LAND PATTERN(Unit:mm)

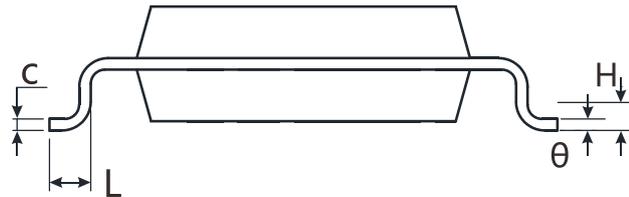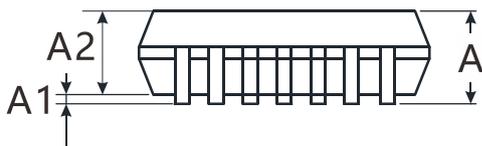

| Symbol | Dimensions In Millimeters | | Dimensions Inches | |
|----------|---------------------------|-------|-------------------|-------|
| | Min | Max | Min | Max |
| A | | 1.200 | | 0.047 |
| A1 | 0.050 | 0.150 | 0.002 | 0.006 |
| A2 | 0.800 | 1.050 | 0.031 | 0.041 |
| b | 0.190 | 0.300 | 0.007 | 0.012 |
| c | 0.090 | 0.200 | 0.004 | 0.008 |
| D | 4.860 | 5.100 | 0.191 | 0.201 |
| E | 4.300 | 4.500 | 0.169 | 0.177 |
| E1 | 6.250 | 6.550 | 0.246 | 0.258 |
| e | 0.650 BSC | | 0.026 BSC | |
| L | 0.500 | 0.700 | 0.020 | 0.028 |
| H | 0.25 TYP | | 0.01 TYP | |
| θ | 1° | 7° | 1° | 7° |


SOIC-8(SOP8)

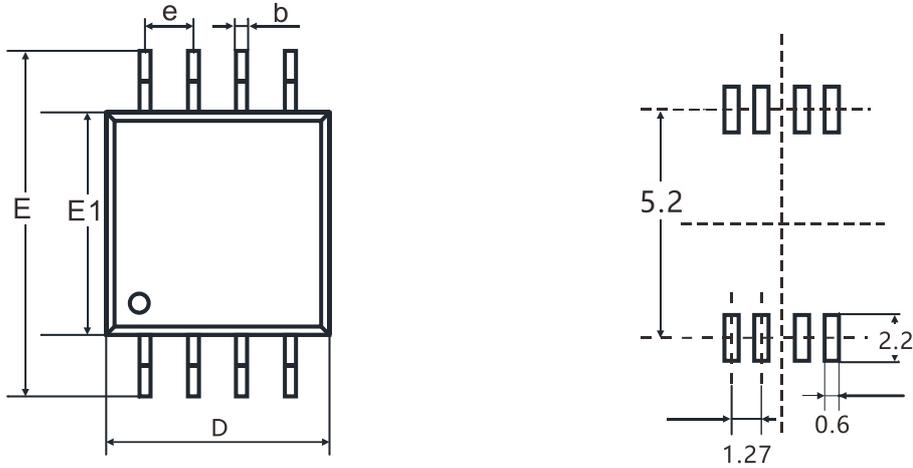

RECOMMENDED LAND PATTERN(Unit:mm)

| Symbol | Dimensions In Millimeters | | Dimensions Inches | |
|----------|---------------------------|-------|-------------------|-------|
| | Min | Max | Min | Max |
| A | 1.350 | 1.750 | 0.053 | 0.069 |
| A1 | 0.100 | 0.250 | 0.004 | 0.010 |
| A2 | 1.350 | 1.550 | 0.053 | 0.061 |
| b | 0.330 | 0.510 | 0.013 | 0.020 |
| c | 0.170 | 0.250 | 0.007 | 0.010 |
| D | 4.800 | 5.000 | 0.189 | 0.197 |
| E | 5.800 | 6.200 | 0.228 | 0.244 |
| E1 | 3.800 | 4.000 | 0.150 | 0.157 |
| e | 1.270 BSC | | 0.050 BSC | |
| L | 0.400 | 1.270 | 0.016 | 0.050 |
| θ | 0° | 8° | 0° | 8° |

SOIC-14(SOP14)

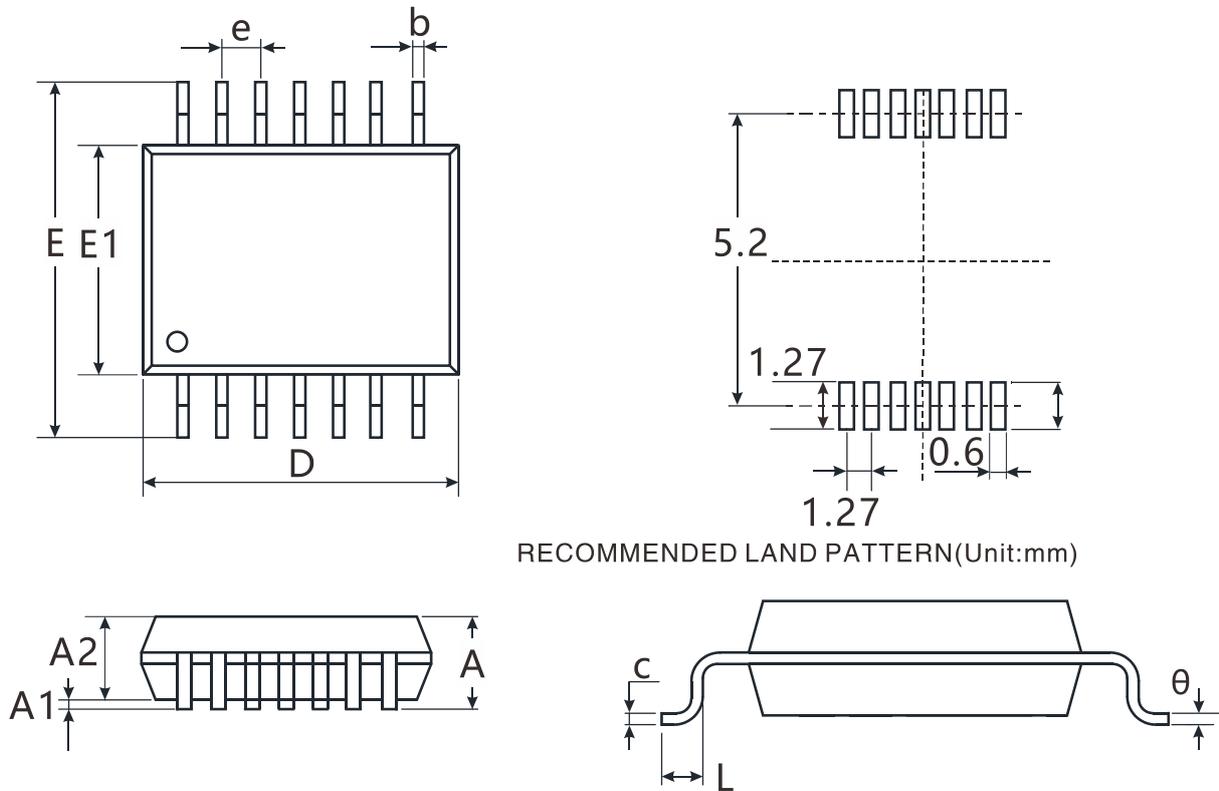

| Symbol | Dimensions In Millimeters | | Dimensions Inches | |
|--------|---------------------------|-------|-------------------|-------|
| | Min | Max | Min | Max |
| A | 1.350 | 1.750 | 0.053 | 0.069 |
| A1 | 0.100 | 0.250 | 0.004 | 0.010 |
| A2 | 1.350 | 1.550 | 0.053 | 0.061 |
| b | 0.310 | 0.510 | 0.012 | 0.020 |
| c | 0.100 | 0.250 | 0.004 | 0.010 |
| D | 8.450 | 8.850 | 0.333 | 0.348 |
| E | 5.800 | 6.200 | 0.228 | 0.244 |
| E1 | 3.800 | 4.000 | 0.150 | 0.157 |
| e | 1.270 BSC | | 0.050 BSC | |
| L | 0.400 | 1.270 | 0.016 | 0.050 |
| θ | 0° | 8° | 0° | 8° |

Package/Ordering Information

| PRODUCT | ORDERING NUMBER | TEMPRANGE | PACKAGE | PAKEAGE MARKING | TRANSPOT MEDIA,QUANTILY |
|----------|-----------------|-------------|----------------|-----------------|-------------------------|
| CBMV321 | CBMV321AS8 | -40°C~125°C | SOIC-8(SOP8) | CBMV321 | Tape and Reel,2500 |
| | CBMV321AST5 | -40°C~125°C | SOT23-5 | RC1F | Tape and Reel,3000 |
| | CBMV321BST5 | -40°C~125°C | SOT23-5 | 321B | Tape and Reel,3000 |
| | CBMV321AMS8 | -40°C~125°C | MSOP-8 | CBMV321 | Tape and Reel,3000 |
| CBMV321S | CBMV321SA8 | -40°C~125°C | SOIC-8(SOP8) | CBMV321S | Tape and Reel,2500 |
| | CBMV321SAT6 | -40°C~125°C | SOT23-6 | 321S | Tape and Reel,3000 |
| CBMV358 | CBMV358AS8 | -40°C~125°C | SOIC-8(SOP8) | CBMV358 | Tape and Reel,2500 |
| | CBMV358AMS8 | -40°C~125°C | MSOP-8 | CBMV358 | Tape and Reel,3000 |
| CBMV358S | CBMV358AMS10 | -40°C~125°C | MSOP-10 | CBMV358S | Tape and Reel,3000 |
| CBMV324 | CBMV324AS14 | -40°C~125°C | SOIC-14(SOP14) | CBMV324 | Tape and Reel,2500 |
| | CBMV324ATS14 | -40°C~125°C | TSSOP-14 | CBMV324 | Tape and Reel,3000 |