

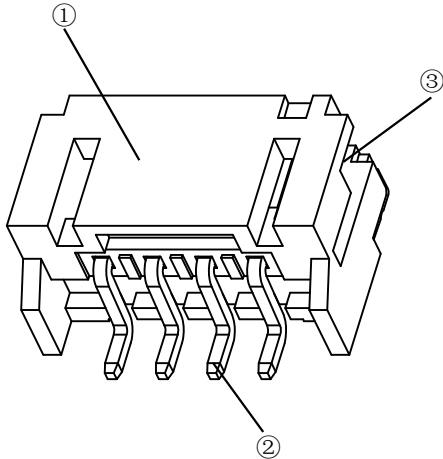
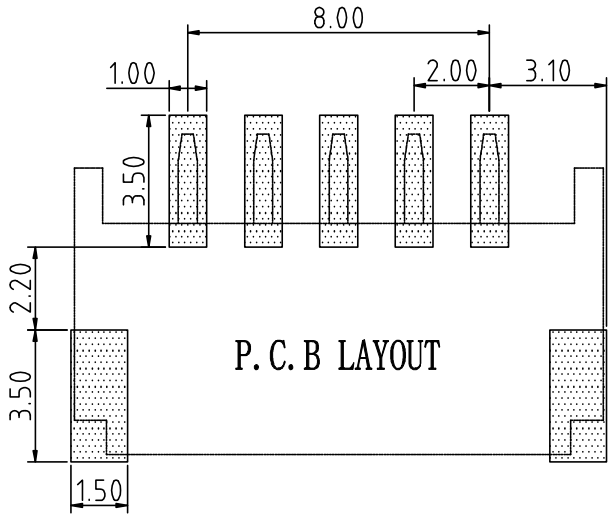
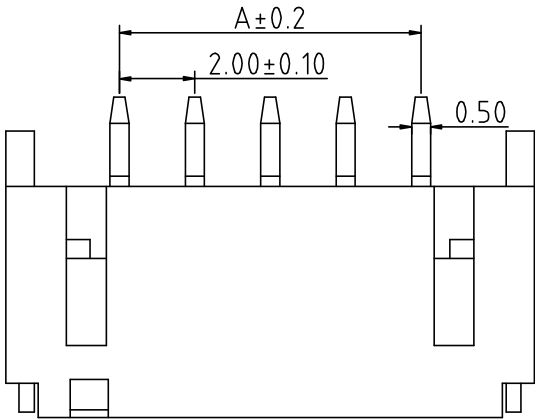


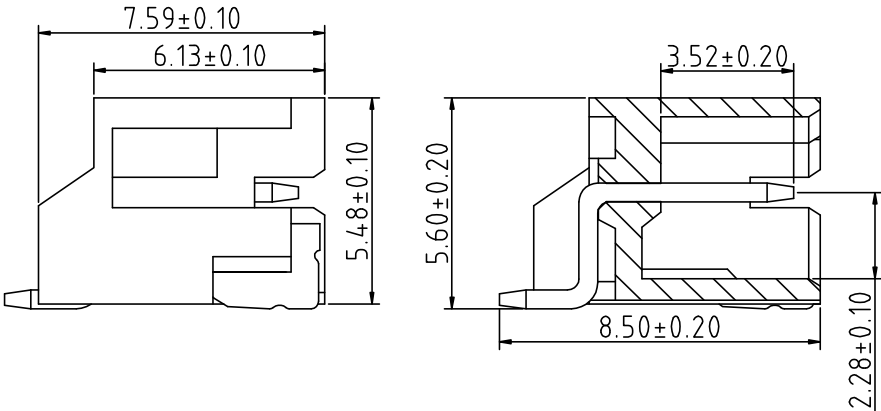

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

Pin	A	B	C
2A	2.00	8.00	6.80
3A	4.00	10.00	8.80
4A	6.00	12.00	10.80
5A	8.00	14.00	12.80
6A	10.00	16.00	14.80
7A	12.00	18.00	16.80
8A	14.00	20.00	18.80
9A	16.00	22.00	20.80
10A	18.00	24.00	22.80
11A	20.00	26.00	24.80
12A	22.00	28.00	26.80
13A	24.00	30.00	28.80
14A	26.00	32.00	30.80
15A	28.00	34.00	32.80
16A	30.00	36.00	34.80

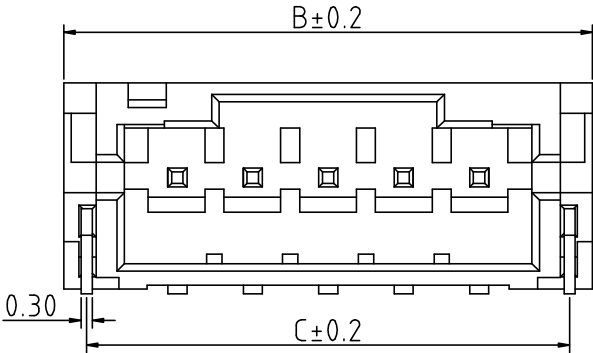

技术参数
间距: 2.0
温度范围: -25~+85℃
额定电压: 250V AC, DC
额定电流: 2.0A AC, DC
接触电阻: 20mΩ
绝缘电阻: 800MΩ
耐压: 500V AC/minute

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD	
DECIMALS:		ANGLES:		TITLE	
X :±0.20		X :±5°		WAFER 针座2.0卧贴	
X.X :±0.10		X.X :±3°		DWN	xiong
X.XX :±0.05		X.XX:±1°		CHKD	lee
				APVD	wang
				PART NO. WAFER-200W-NA	
				SCALE:1:1	UNIT: mm
				SIZE: A4	SHEET:10F 1
				REV: A4	
				CUSTOMER COPY	