




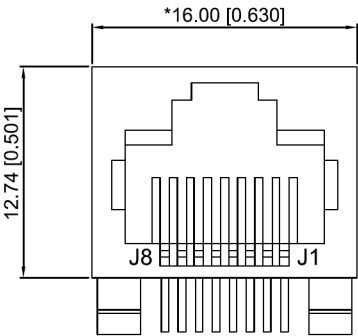


FRONT VIEW

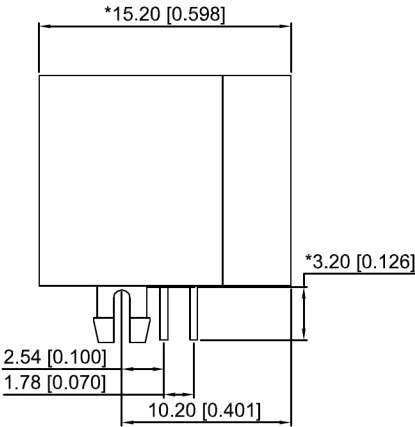

RIGHT SIDE VIEW




BOTTOM VIEW

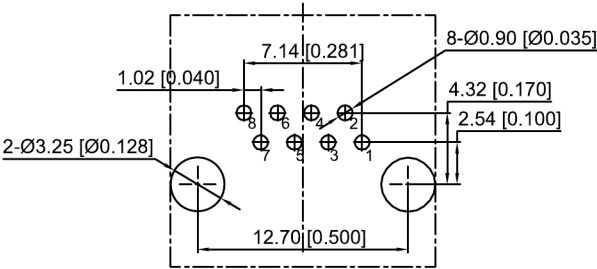

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

XKB Connectivity

XKB Connectivity

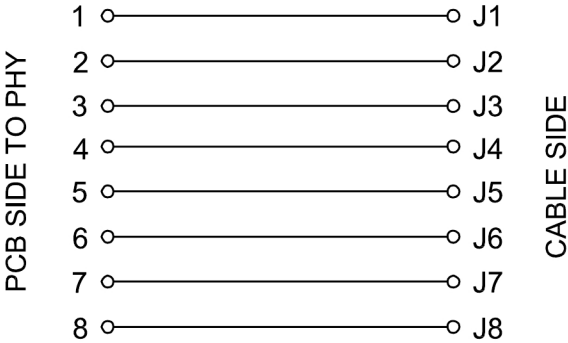

XKB Connectivity

MATERIAL 材料:

HOUSING 外壳: PA46,UL94V-0,BLACK.
TERMINAL 端子: PHOSPHOR BRONZE ,Ø=0.46MM,
GOLD PLATING ON CONTACT AREA.
SHIELD:C2680,T=0.20MM,20U" MINNICKELPLATING
ON ALL AREA.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN.12.5MM/MINUTE
INSERTION FORCE 插入力: 2.2KG.F MAX
RETENTION STRENGTH 固位力:7.7KG.F BETWEEN JACK AND PLUG
OPERATING TEMPERATURE 工作温度: -40°C~+85°C.
STORAGE TEMPERATURE 储存温度: -40°C~+85°C.
ALL CRITICAL DIMENSIONS WITH "**"

ELECTRICAL 电动:

VOLTAGE 电压:125 VOLTS AC
CURRENT RATING 额定电流:1.5AMP
DIELECTRIC STRENGTH 介电强度:1000 VAC RMS 50HZ OR 60HZ,1MIN
INSULATION RESISTANCE 绝缘电阻:500 MEGA OHMS MIN.INITIAL
AFTER 500V DC FOR 1 MINUTE
CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX
INITIAL 50 MILLIOHMS MAX.AFTER
DURABILITY TEST

广东星坤科技股份有限公司	
生效	日期
文件工程章	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δ*					ANGLAR ±5°
Δ*					L ≤ 4 ±0.2
Δ*					4 < L ≤ 16 ±0.3
Δ*					16 < L ≤ 63 ±0.4
Δ*					L > 63 ±0.5
REVISIONS					UNSPECIFIED TOLERANCES
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn					

DSND		DATE		SCALE: N/A	MODEL TYPE: RJ JACK
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	X12ADIWA3DY1027
XKB INDUSTRIAL PRECISION CO.,LIMITED				WEIGHT 1.0g	SHEET 1/1
					REVISION A0