




DIN41612

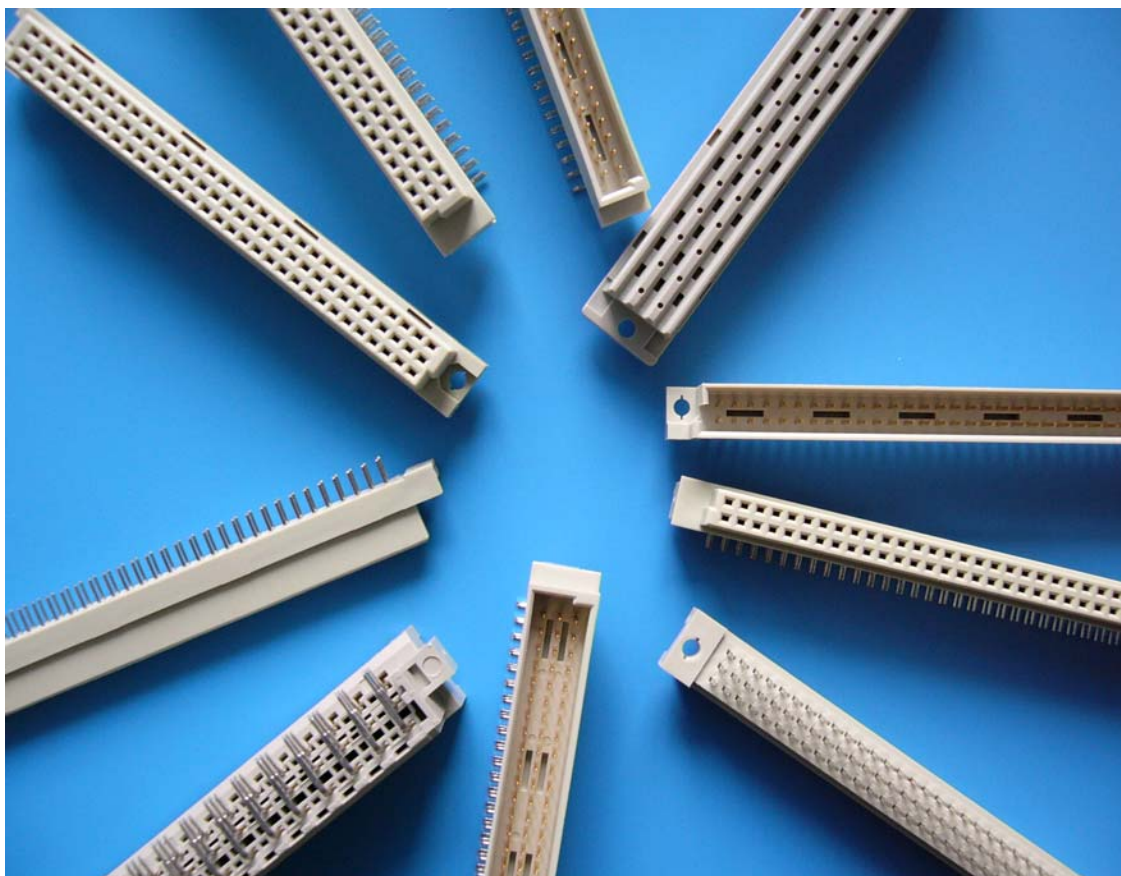

正凌精密股份有限公司 NEXTRONICS ENGINEERING CORP

Address: 2F.31 Lane 169 KangNing STR. HsiChih Taipei Hsien, Taiwan, R.O.C.

TEL: 886-2-66162000 FAX: 886-2-86951177

Home Page: <http://www.nexttron.com.tw>

国内代理商: 深圳市君灏精密工业有限公司

地址: 深圳市龙华区观澜街道高尔夫大道23号

电话: 0755-21618818 传真: 0755-26426035

网站邮箱: <http://www.jhjm.cc>

Email: sales@jhjm.cc



Certificate No: 44276

正凌精工

PRODUCTION INDEX

Table Of Contents	Page
DIN41612 C TYPE——96PIN MALE.....	P1
DIN41612 C TYPE——64PIN MALE.....	P2
DIN41612 C TYPE——48PIN MALE.....	P3
DIN41612 C TYPE——32PIN MALE.....	P4
DIN41612 C TYPE——96PIN LONG FEMALE.....	P5
DIN41612 C TYPE——64PIN LONG FEMALE.....	P6
DIN41612 C TYPE——96PIN FEMALE.....	P7
DIN41612 C TYPE——64PIN FEMALE.....	P8
DIN41612 C TYPE——48PIN FEMALE.....	P9
DIN41612 C TYPE——32PIN FEMALE.....	P10
DIN41612 R TYPE——96PIN MALE.....	P11
DIN41612 R TYPE——64PIN MALE.....	P12
DIN41612 R TYPE——48PIN MALE.....	P13
DIN41612 R TYPE——32PIN MALE.....	P14
DIN41612 R TYPE——96PIN FEMALE.....	P15
DIN41612 R TYPE——64PIN FEMALE.....	P16
DIN41612 R TYPE——48PIN FEMALE.....	P17
DIN41612 R TYPE——32PIN FEMALE.....	P18
DIN41612 B TYPE——64PIN MALE.....	P19
DIN41612 B TYPE——32PIN MALE.....	P20
DIN41612 B TYPE——64PIN FEMALE.....	P21
DIN41612 B TYPE——32PIN FEMALE.....	P22
DIN41612 B TYPE——64PIN LONG FEMALE.....	P23
DIN41612 Q TYPE——64PIN MALE.....	P24
DIN41612 Q TYPE——32PIN MALE.....	P25
DIN41612 Q TYPE——64PIN FEMALE.....	P26
DIN41612 Q TYPE——32PIN FEMALE.....	P27
DIN41612 F TYPE——48PIN MALE.....	P28
DIN41612 F TYPE——48PIN FEMALE.....	P29
DIN41612 IDC TYPE——32PIN FEMALE.....	P30
DIN41612 IDC TYPE——48PIN FEMALE.....	P31
DIN41612 IDC TYPE——64PIN FEMALE.....	P32
DIN41612 IDC TYPE——96PIN FEMALE.....	P33
DIN41612 IDC TYPE——32PIN FEMALE.....	P34
DIN41612 IDC TYPE——64PIN FEMALE.....	P35

710 AND 720 SERIES

DIN41612 C TYPE——96PIN MALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V



For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-1100-3196-R

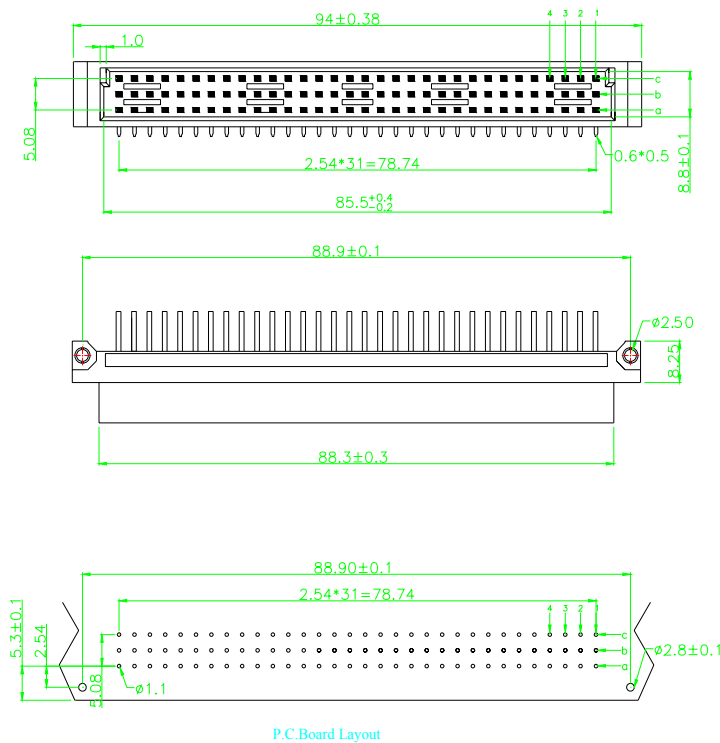


Ordering Information

710-	1100-	31	96-	R
710 Series	1:Male;3:Female		96:96PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 C TYPE——64PIN MALE

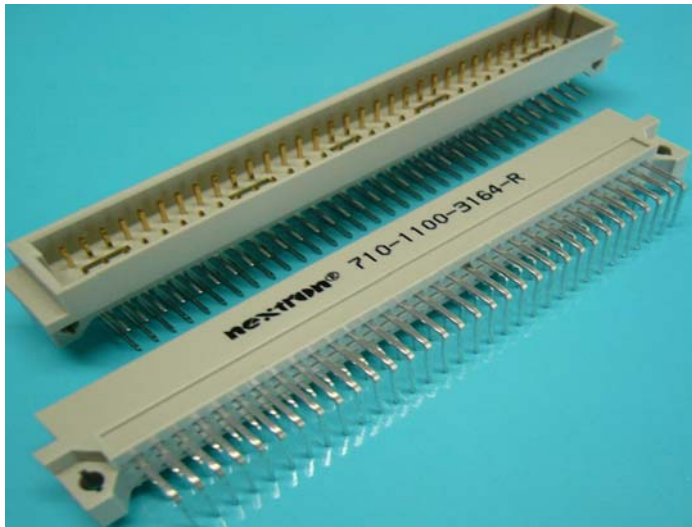

Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V



For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-1100-3164-R

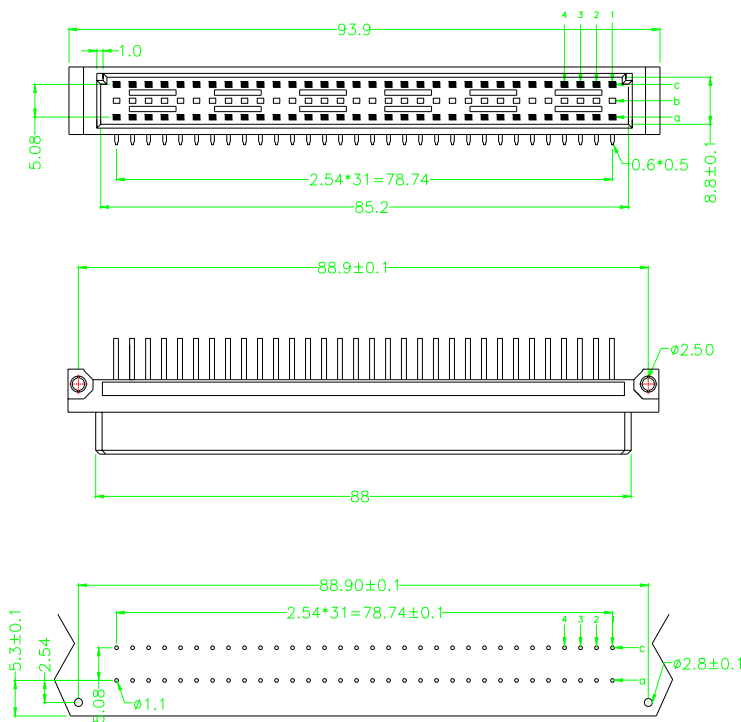

Ordering Information

710-	1100-	31	64-	R
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 C TYPE——48PIN MALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V



For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-1100-3148-R

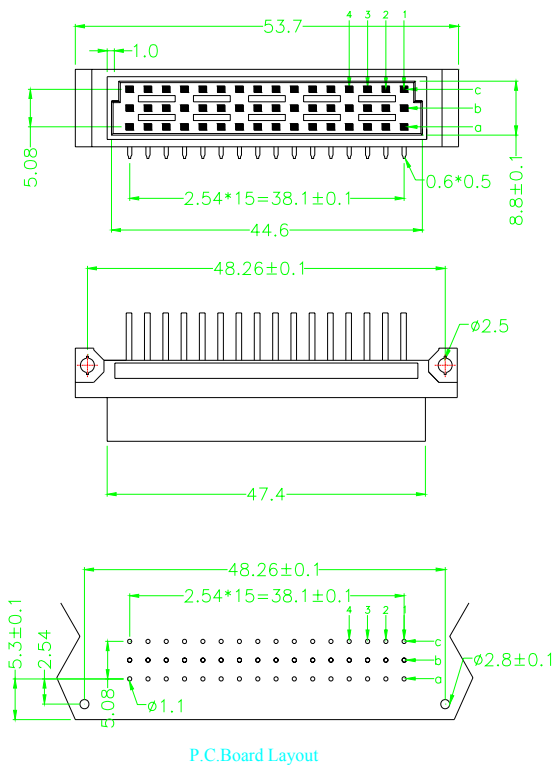


Ordering Information

710-	1100-	31	48-	R
710 Series	1:Male;3:Female		48:48PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 C TYPE——32PIN MALE

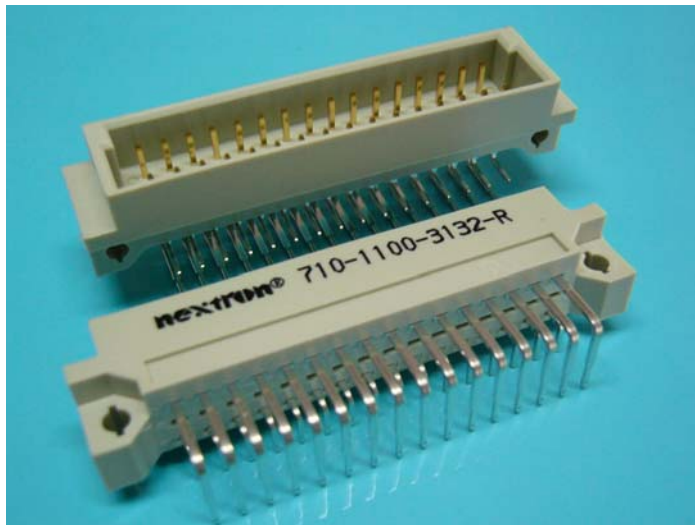

Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V


Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-1100-3132-R

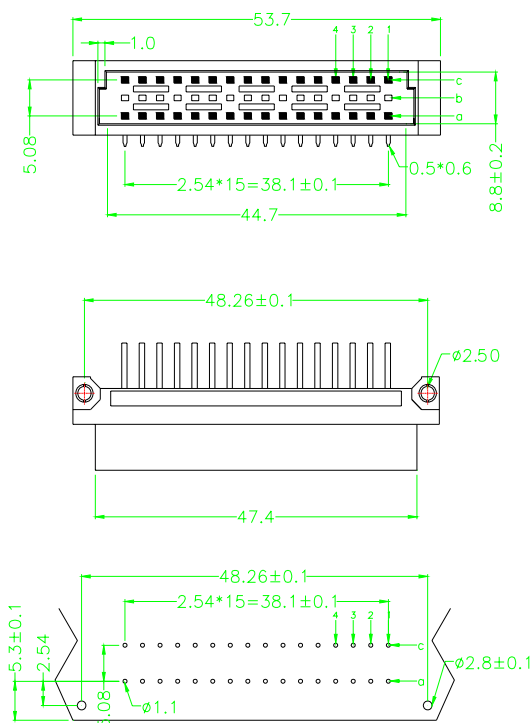

P.C.Board Layout



Ordering Information

710-	1100-	31	32-	R
710 Series	1:Male;3:Female		32:32PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 C TYPE——96PIN LONG FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-3100-1396-S

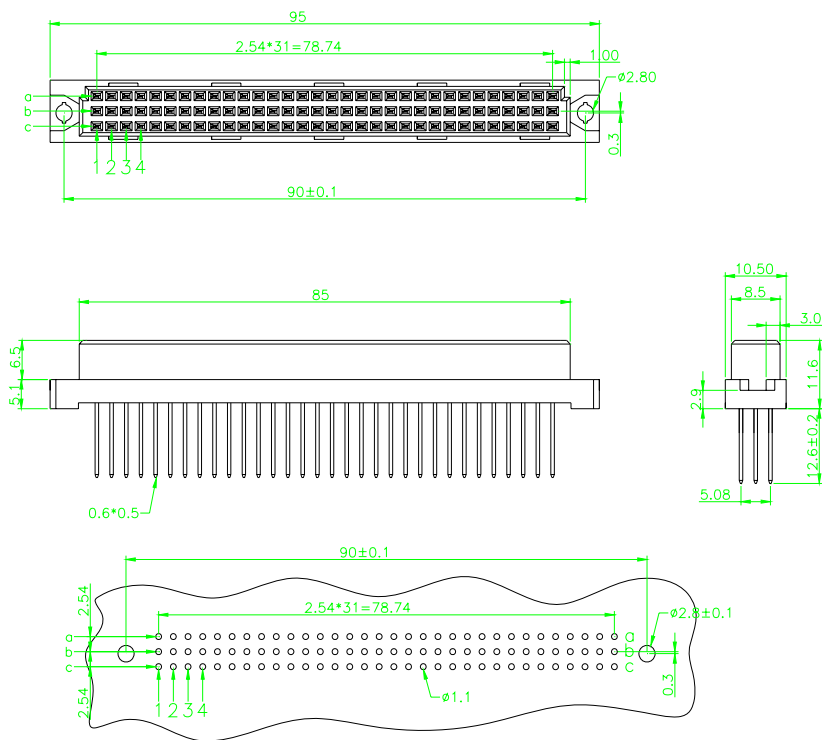

P.C.Board. Layout

Ordering Information

710-	3100-	13	96-	S
710 Series	1:Male;3:Female		96:96PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 C TYPE——64PIN LONG FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V



For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-3100-1364-S

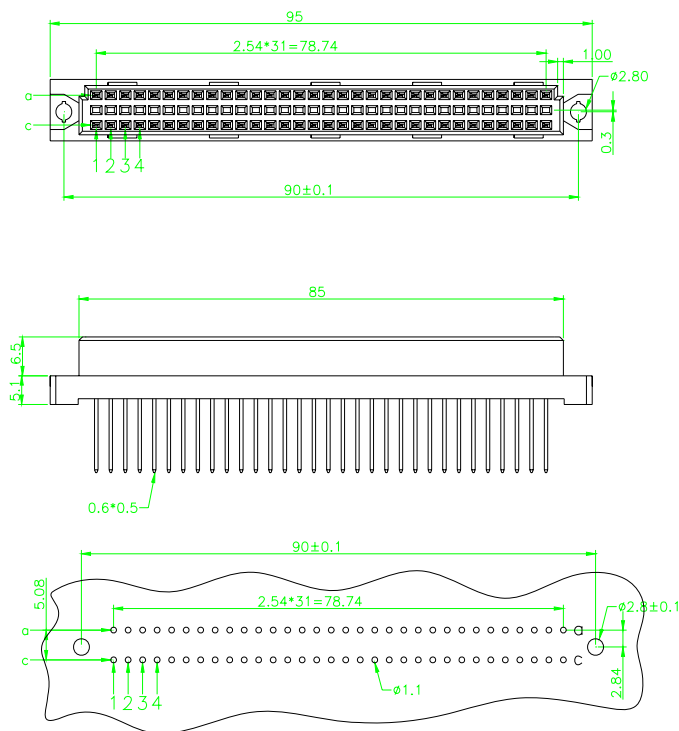

Ordering Information

710-	3100-	13	64-	S
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 C TYPE——96PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-3100-3296-S

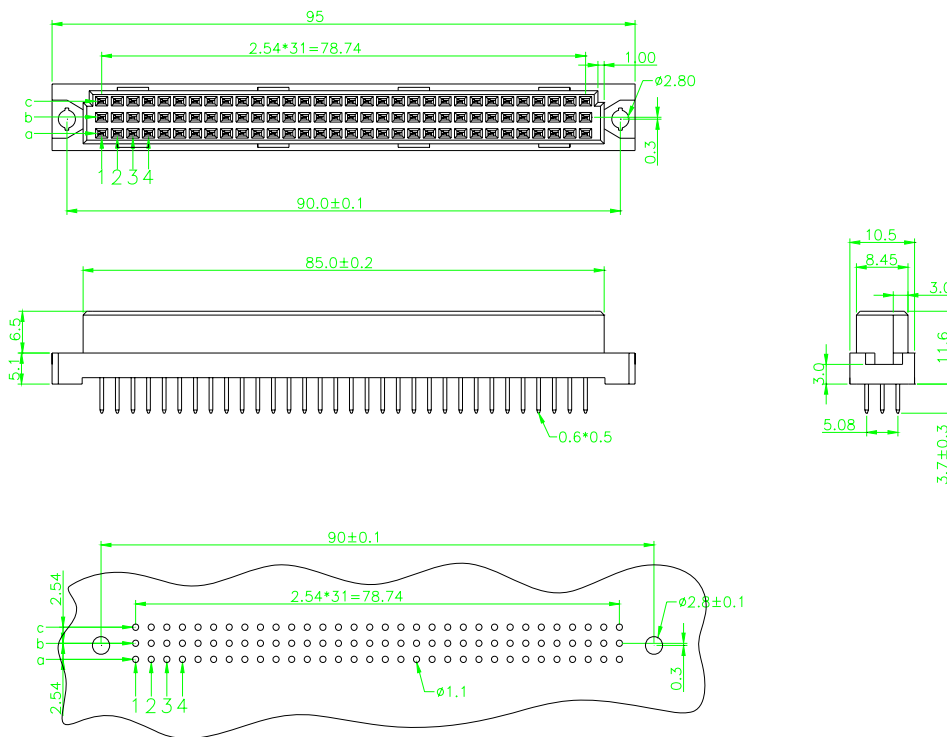


P.C.Board. Layout

Ordering Information

710-	3100-	32	96-	S
710 Series	1:Male;3:Female		96:96PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 C TYPE——64PIN FEMALE

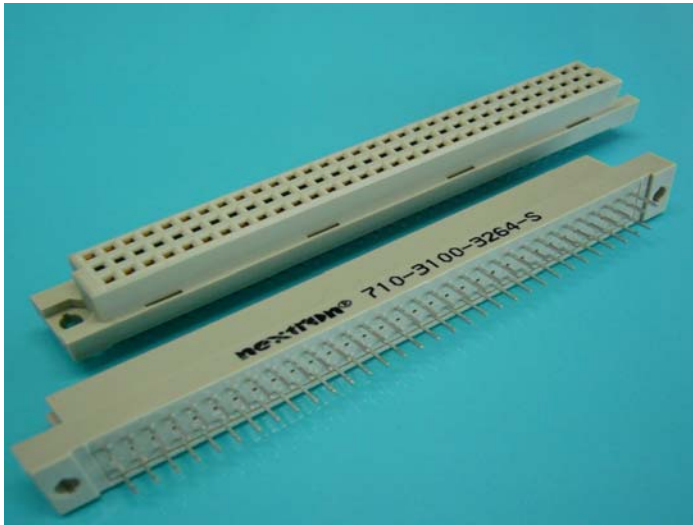

Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V


Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-3100-3264-S

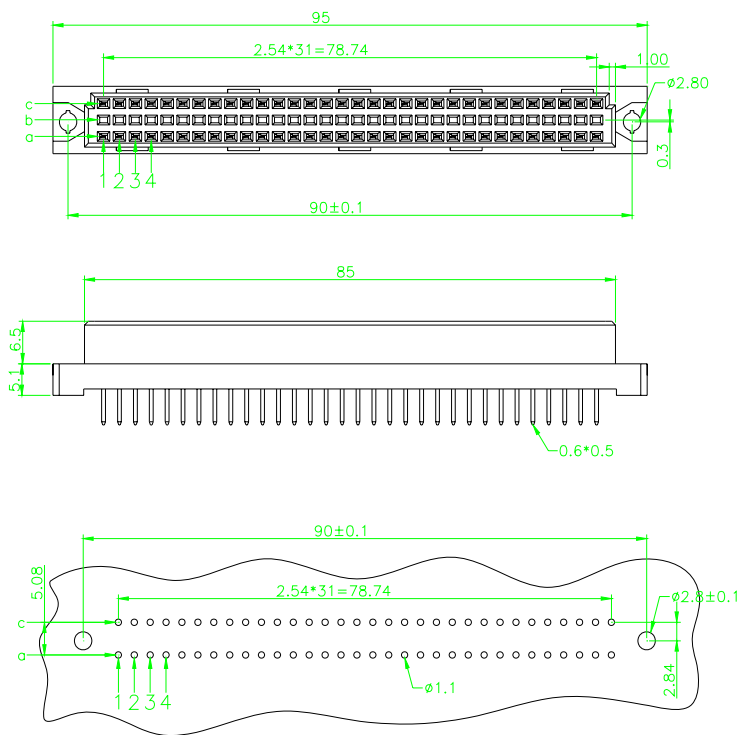

P.C.Board Layout



Ordering Information

710-	3100-	32	64-	S
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 C TYPE——48PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V

For one minute


Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing:

NO:710-3100-3248-S

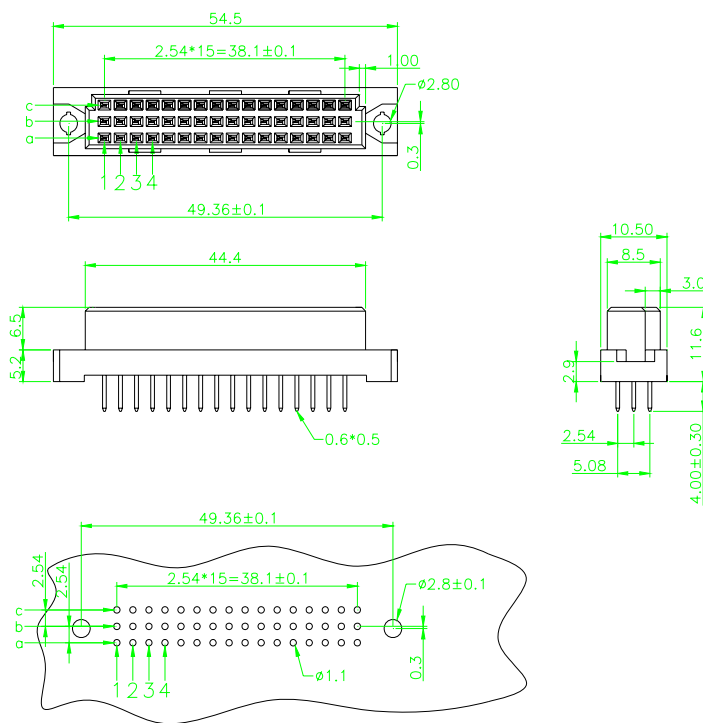

P.C.Board Layout

Ordering Information

710-	3100-	32	48-	S
710 Series	1:Male;3:Female		48:48PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 C TYPE——32PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V

For one minute


Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing:

NO:710-3100-3232-S

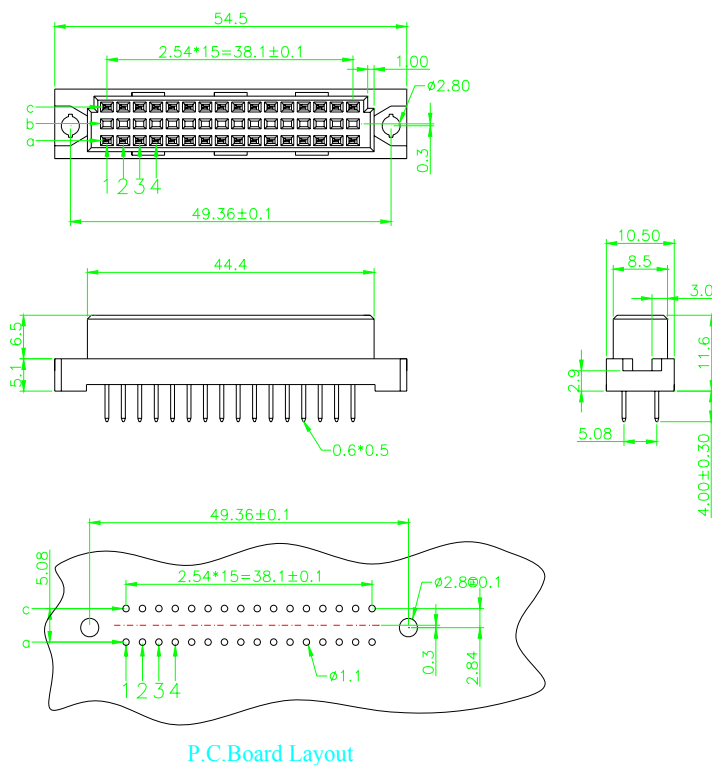

Ordering Information

710-	3100-	32	32-	S
710 Series	1:Male;3:Female		32:32PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 R TYPE——96PIN MALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V

For one minute


Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing:

NO:710-1100-3096-S

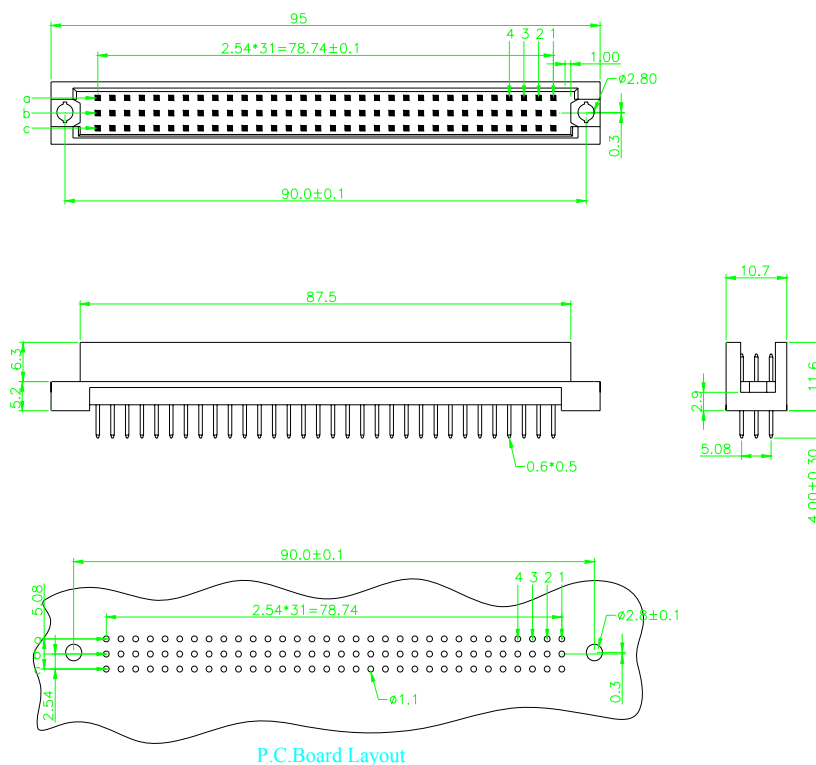

Ordering Information

710-	1100-	30	96-	S
710 Series	1:Male;3:Female		96:96PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 R TYPE——64PIN MALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~+105℃

The Drawing: NO:710-1100-3064-S

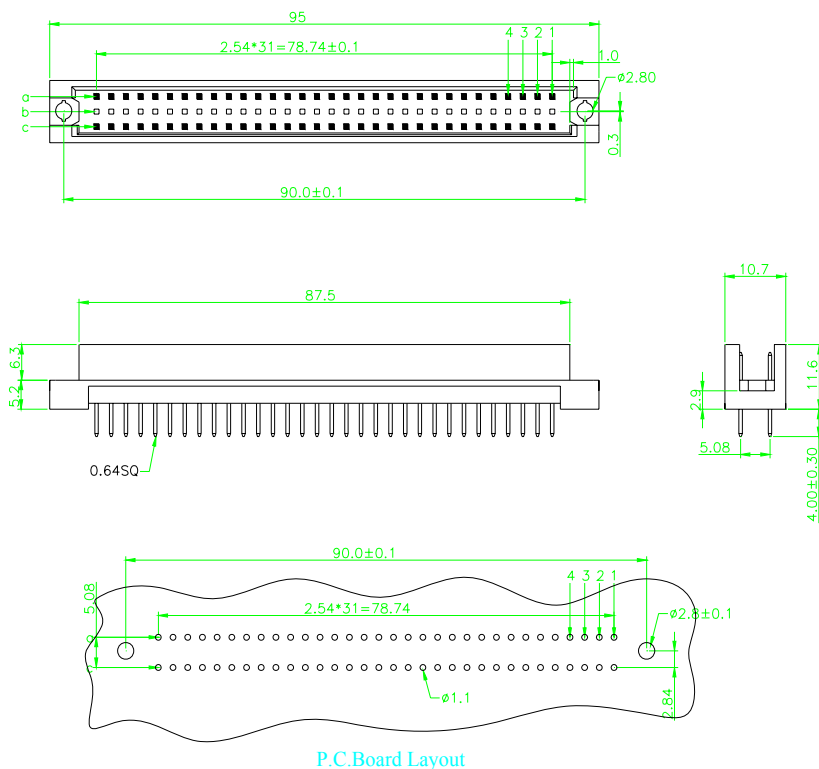

Ordering Information

710-	1100-	30	64-	S
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 R TYPE——48PIN MALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V

For one minute


Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing:

NO:710-1100-3048-S

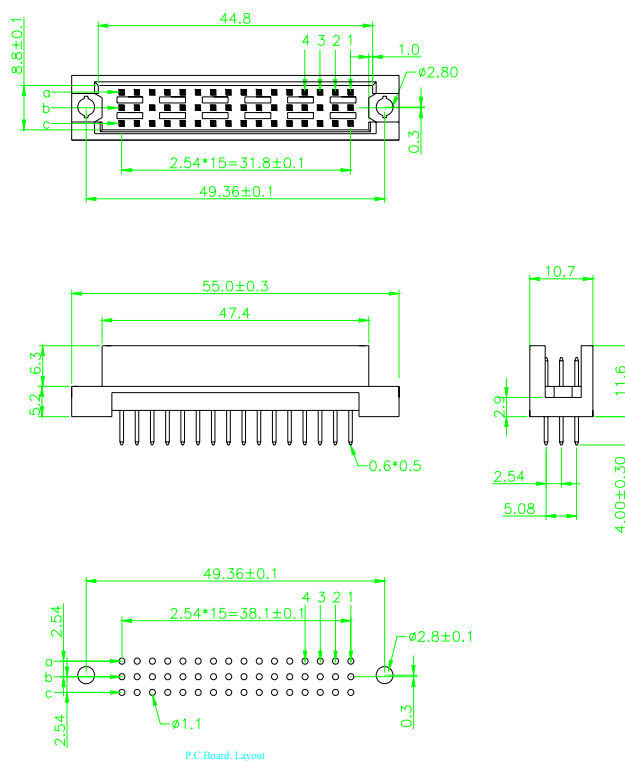

Ordering Information

710-	1100-	30	48-	S
710 Series	1:Male;3:Female		48:48PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight


DIN41612 R TYPE—32PIN MALE



Contacts:Brass

Operating Temperature:-55°C ~ +105°C

NO:710-1100-3032-S

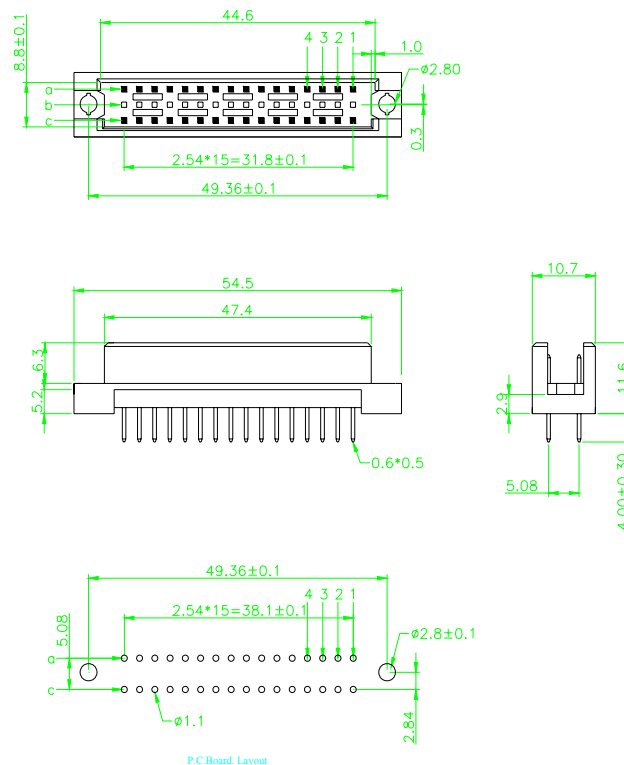

710-	1100-	30	32-	S
710 Series	1:Male;3:Female		32:32PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 R TYPE——96PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-3100-1396-R

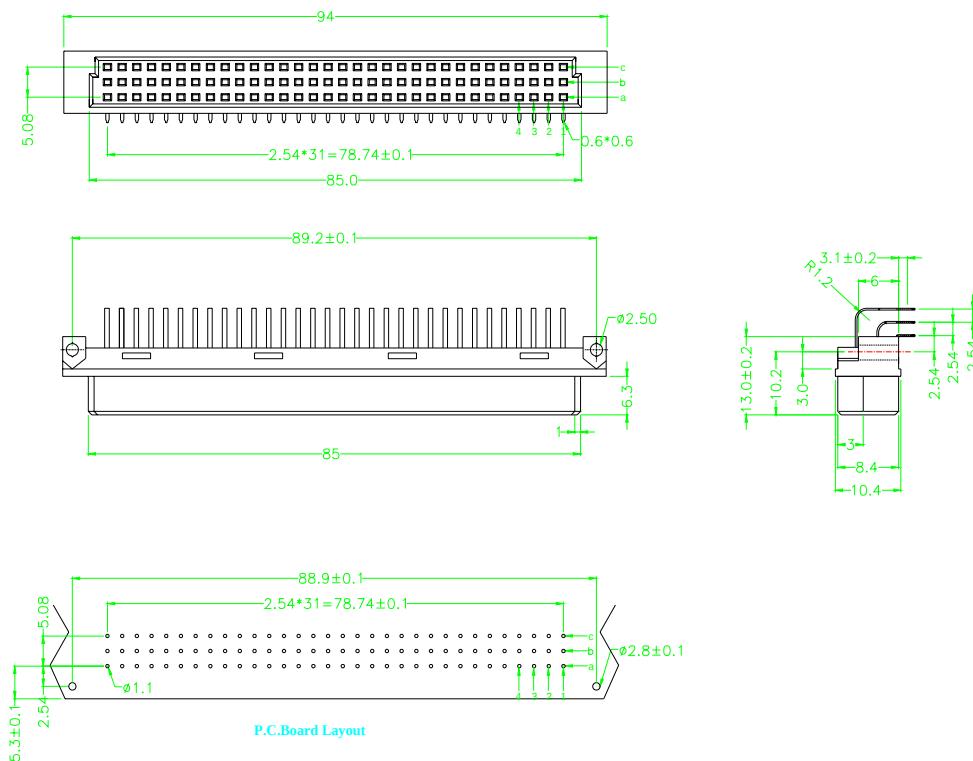

Ordering Information

710-	3100-	13	96-	R
710 Series	1:Male;3:Female		96:96PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 R TYPE——64PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V

For one minute



Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ $\sim$ +105℃

The Drawing:

NO:710-3100-1364-R

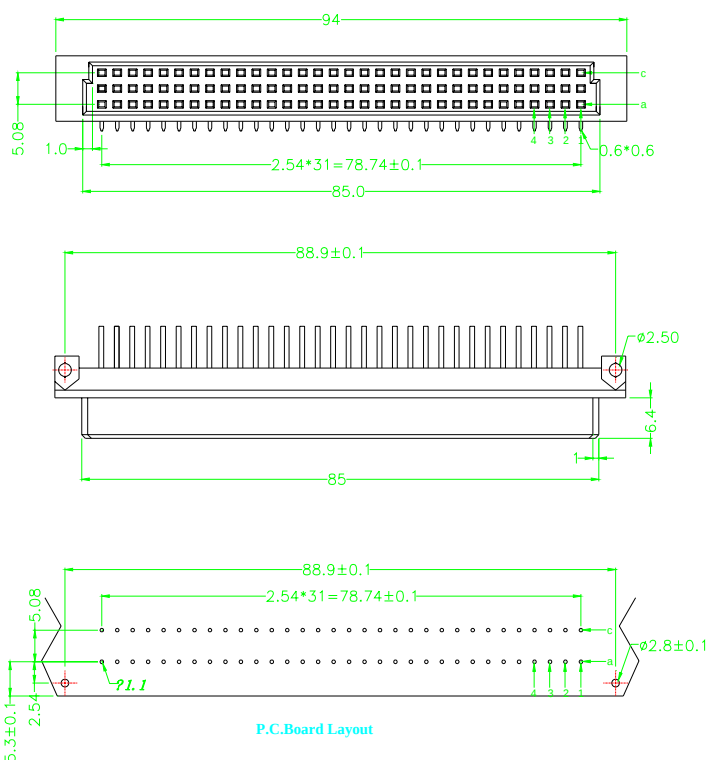

Ordering Information

710-	3100-	13	64-	R
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 R TYPE——48PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ $\sim$ +105℃

The Drawing: NO:710-3100-1348-R

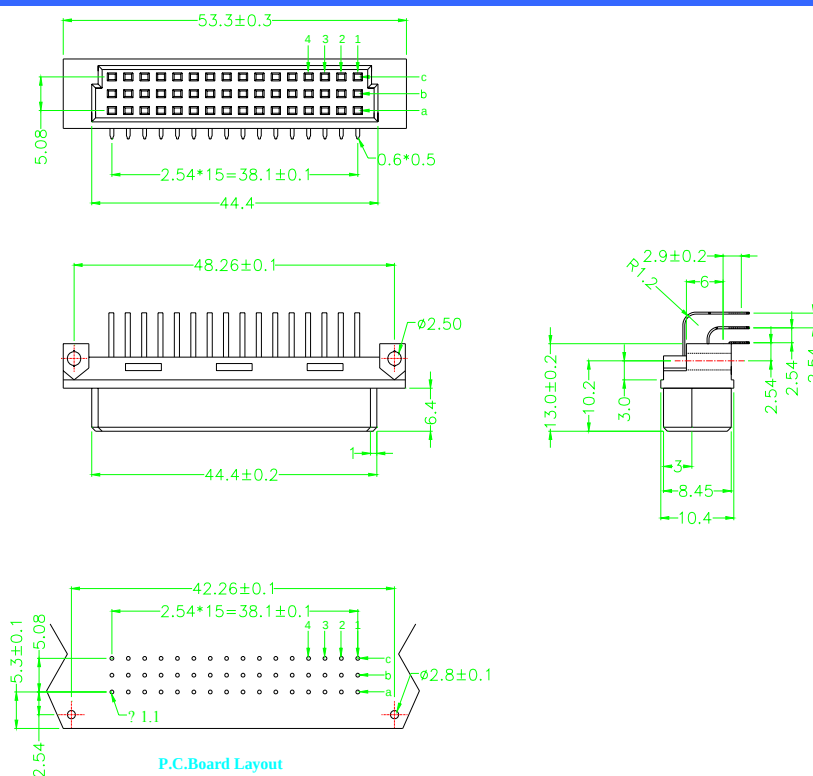

Ordering Information

710-	3100-	13	48-	R
710 Series	1:Male;3:Female		48:48PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 R TYPE——32PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55°C ~ +105°C

The Drawing: NO:710-3100-1332-R

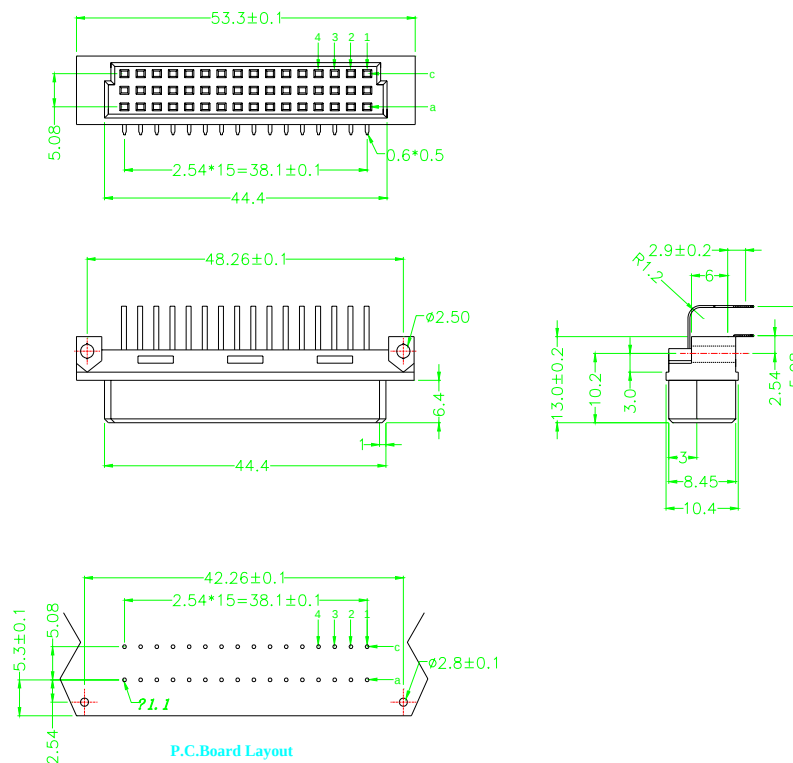

Ordering Information

710-	3100-	13	32-	R
710 Series	1:Male;3:Female		32:32PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃~+105℃

The Drawing: NO:710-1100-2164-R

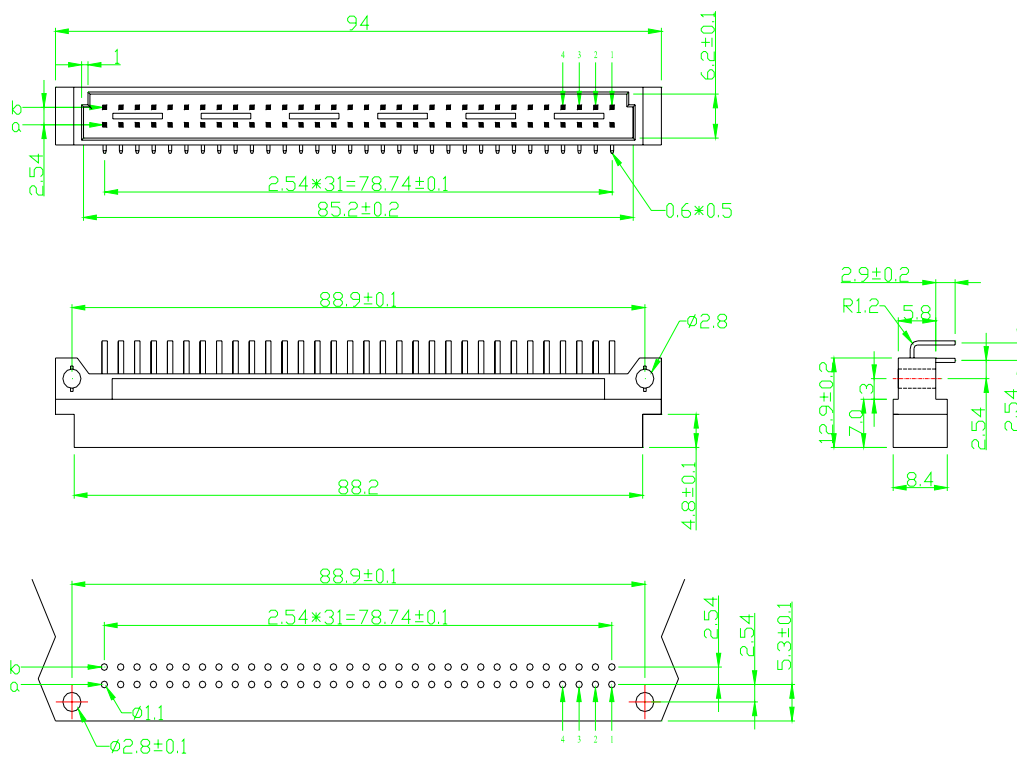

P.C.Board Layout

Ordering Information

720-	1100-	21	64-	R
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 B TYPE——32PIN MALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V



For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-1100-2132-R

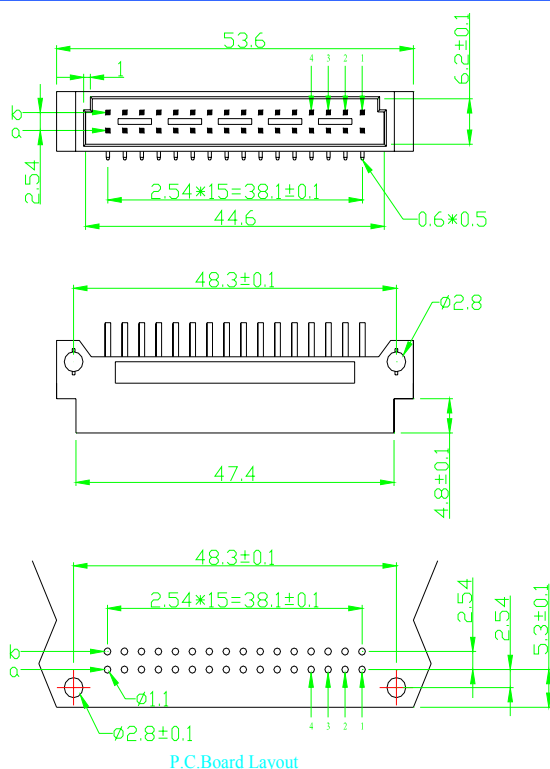

Ordering Information

720-	1100-	21	32-	R
710 Series	1:Male;3:Female		32:32PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

DIN41612 B TYPE——64PIN FEMALE



Contacts:Brass

Dielectric Withstanding Voltage:AC 1000V

Operating Temperature:-55°C ~ +105°C

The technical drawings illustrate the P.C Board Layout with the following dimensions and features:

- Top View:** Shows a rectangular board with a total length of 95.0 ± 0.25 and a width of 90.0 ± 0.1 . The central component area has a length of $2.54 \times 31 = 78.74 \pm 0.1$. Mounting holes are specified as $\phi 2.8$ with a spacing of 0.3 . A detail view shows a grid of components with a pitch of 0.6×0.5 .
- Side View:** Shows the board's profile with a total thickness of 85.0 ± 0.25 . The component area is 6.5 thick, and the base is 5.0 thick. The mounting holes are 0.6×0.5 .
- Detail View:** Shows a close-up of the mounting holes with a diameter of 8.0 ± 0.2 and a spacing of 6.0 . The holes are 3 wide and 2.54 ± 0.05 apart.
- Bottom View:** Shows the reverse side of the board with a total length of 90.0 ± 0.25 and a width of 90.0 ± 0.1 . The central component area has a length of $2.54 \times 31 = 78.74 \pm 0.1$. Mounting holes are specified as $\phi 2.8 \pm 0.1$ with a spacing of 0.3 . A detail view shows a grid of components with a pitch of $\phi 1.1$.

720-	3100-	22	64-	S
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 B TYPE——32PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V


Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:720-3100-2232-S

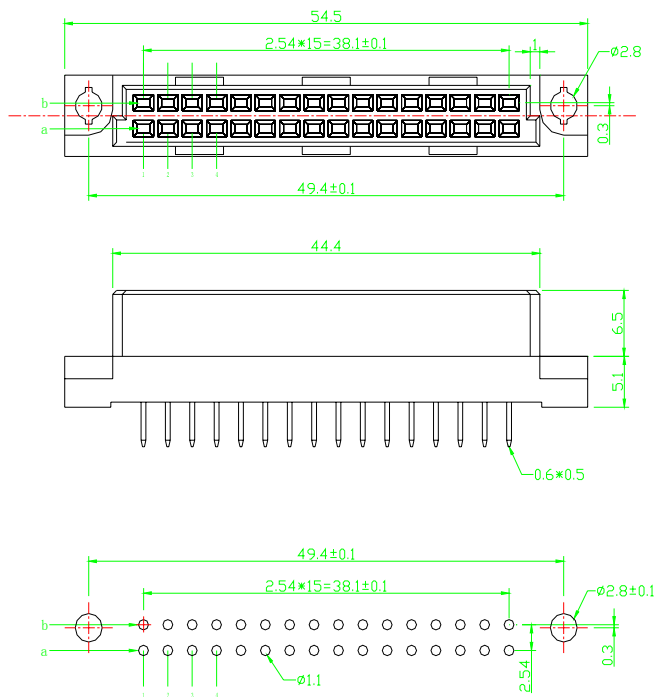

P.C Board Layout



Ordering Information

720-	3100-	22	32-	S
710 Series	1:Male;3:Female		32:32PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 B TYPE——64PIN LONG FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:720-3100-1164-S

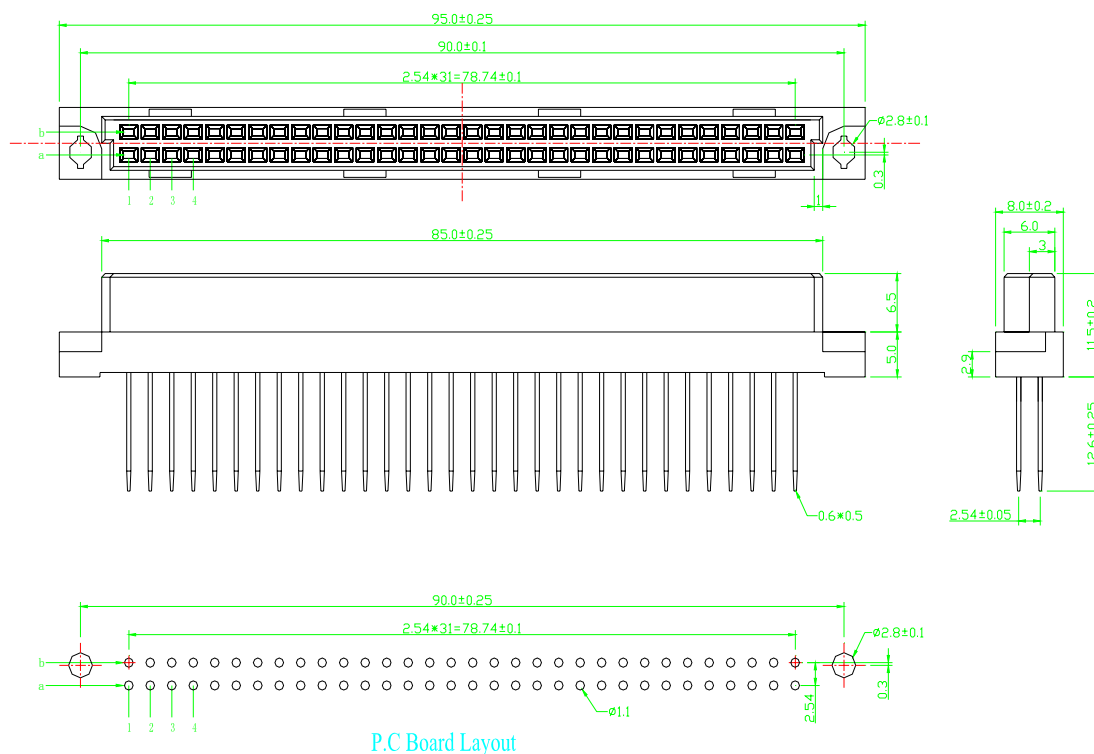

Ordering Information

720-	3100-	11	64-	S
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 Q TYPE——64PIN MALE

nexttron®



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:720-1100-2064-S

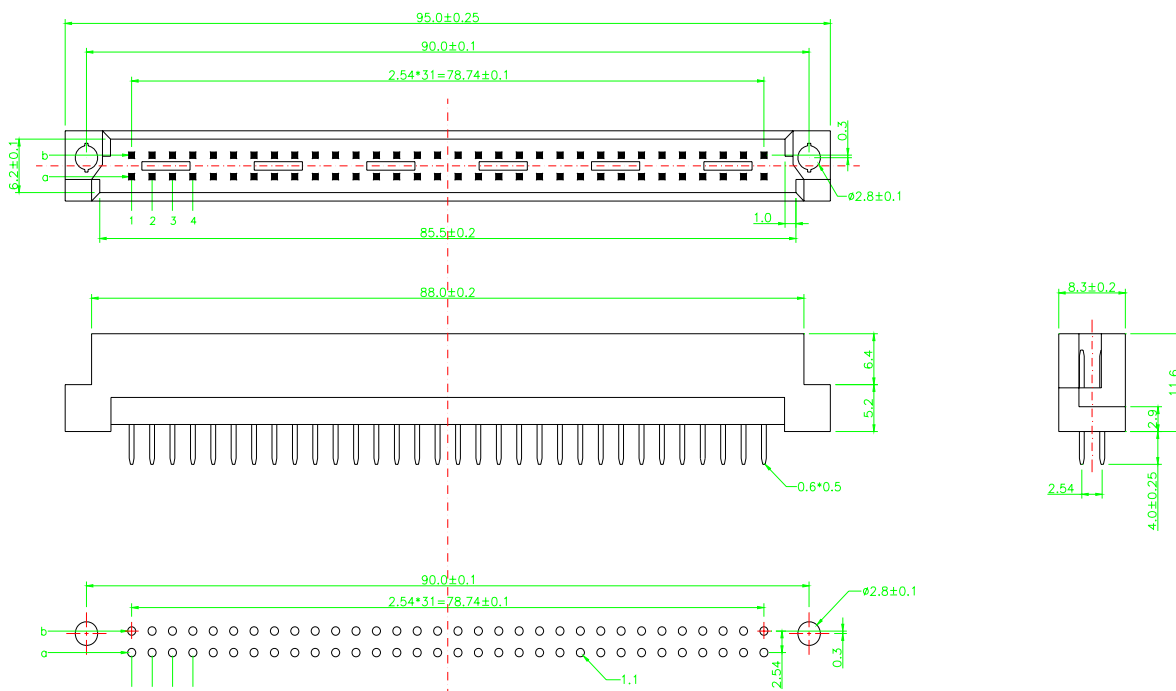

P.C Board Layout

Ordering Information

720-	1100-	20	64-	S
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 Q TYPE——32PIN MALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V



For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:720-1100-2032-S

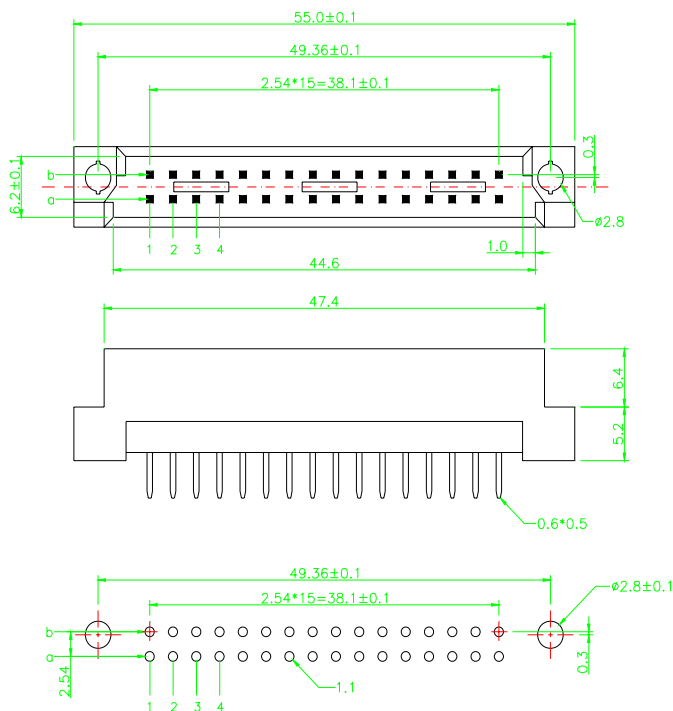

P.C Board Layout

Ordering Information

720-	1100-	20	32-	S
710 Series	1:Male;3:Female		32:32PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance: 30m Ω max.at DC 100mA

Operating Temperature:-55°C ~ +105°C

The Drawing: **NO:720-3100-1264-R**

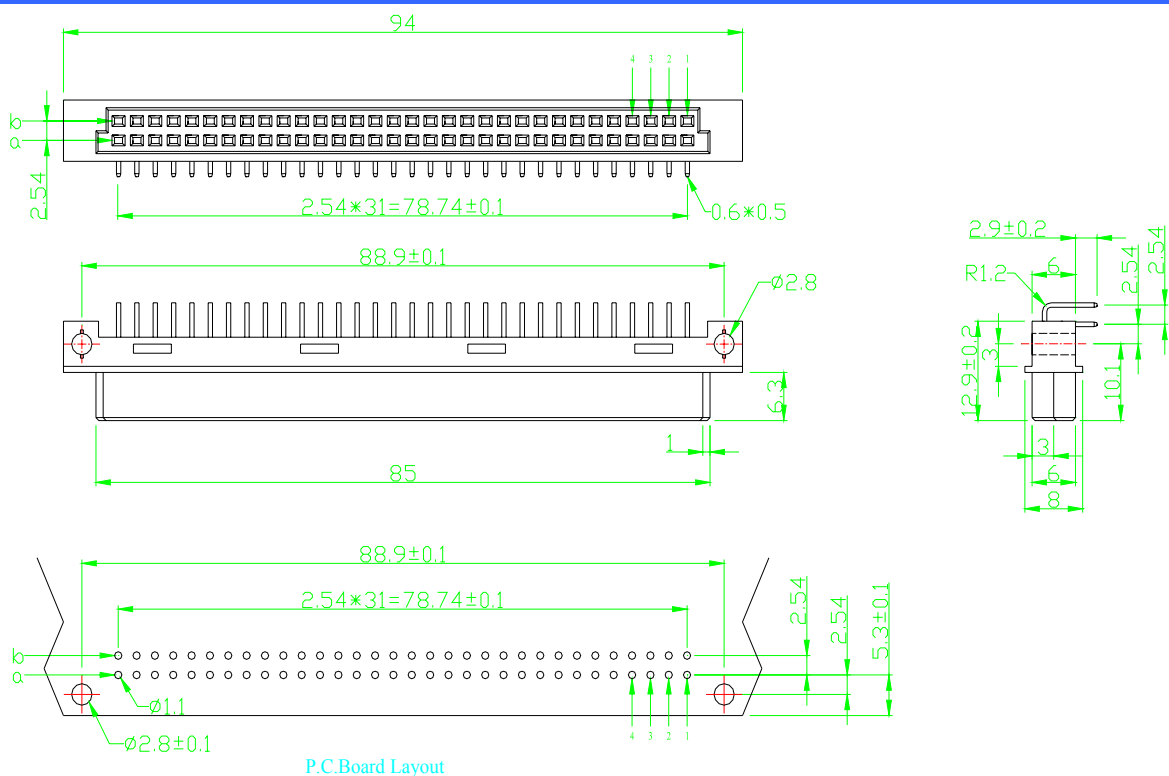

Ordering Information

720-	3100-	12	64-	R
710 Series	1:Male;3:Female		64:64PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

710 AND 720 SERIES

DIN41612 Q TYPE——32PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:2 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:720-3100-1232-R

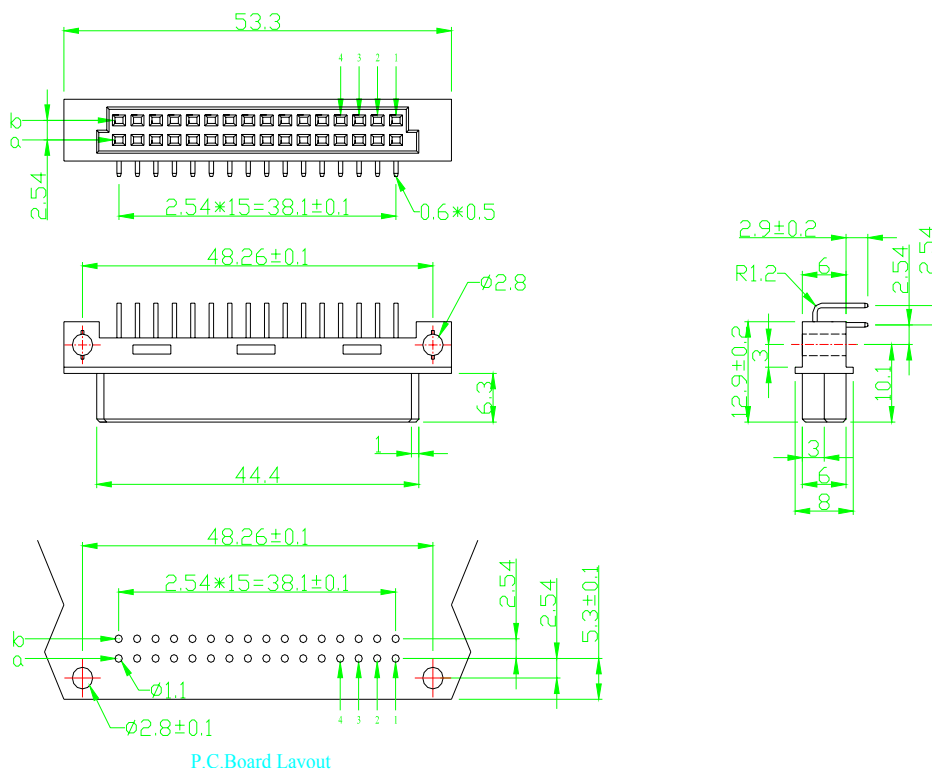

Ordering Information

720-	3100-	12	32-	R
710 Series	1:Male;3:Female		32:32PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:5.6 AMP

Dielectric Withstanding Voltage:AC 1000V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃~+105℃

The Drawing: NO:710F-1100-3148-R

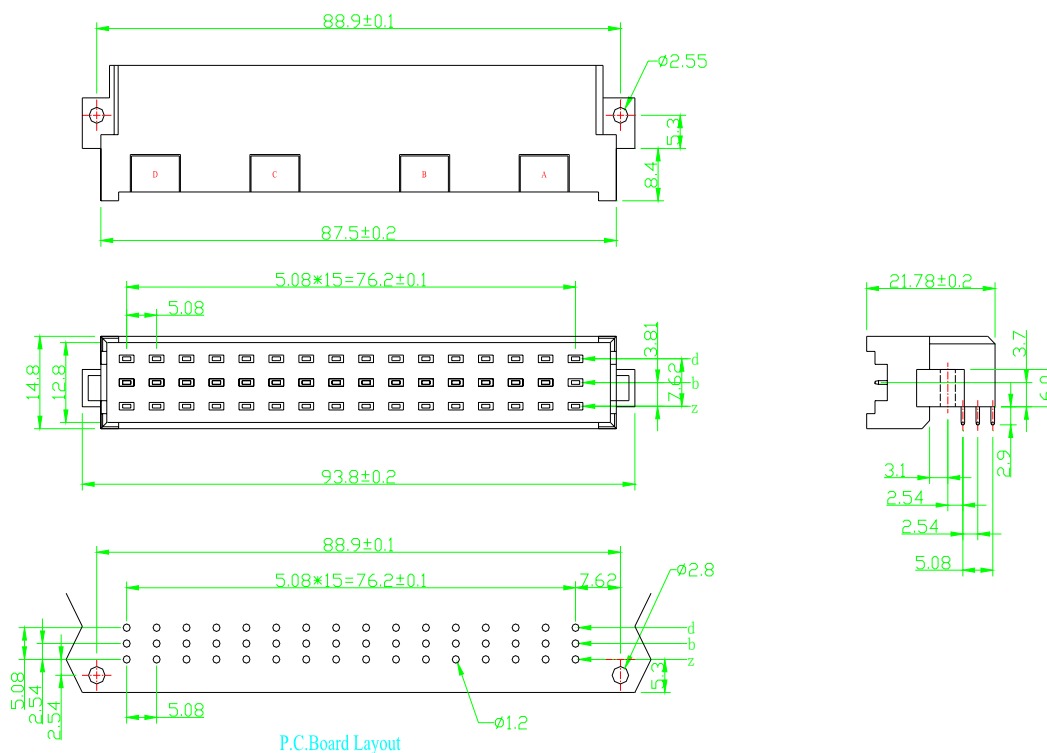

Ordering Information

710F-	1100-	31	48-	R
710 Series	1:Male;3:Female		48:48PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight

DIN41612 F TYPE—48PIN FEMALE



Operating Temperature:-55°C ~ +105°C

Technical drawing of the P.C. Board Layout, showing three views: Top, Side, and Bottom.

Top View:

- Overall Length: 95.0 ± 0.2
- Overall Width: 76.2
- Central Hole Pitch: 5.08
- Central Hole Array Length: 76.2 ± 0.1
- Mounting Tab Width: 10.1
- Mounting Tab Height: 0.7×0.6


Side View:

- Overall Length: $85^{+0.0}_{-0.2}$
- Mounting Tab Height: 10.1

Bottom View:

- Overall Length: 90.0 ± 0.1
- Overall Width: 76.2
- Central Hole Pitch: 5.08
- Central Hole Array Length: 76.2 ± 0.1
- Mounting Tab Width: 8.18
- Mounting Tab Height: 10.1
- Central Hole Diameter: $\phi 1.2$
- Corner Hole Diameter: $\phi 2.8$

P.C. Board Layout



710F-	3100-	32	48-	S
710 Series	1:Male;3:Female		48:48PIN	R:Right angle
1:3Row;2:2Row	1:White			S:Straight



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:1 AMP

Dielectric Withstanding Voltage:AC 500V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~+105℃

The Drawing: NO:720-3100-2232-S.IDC

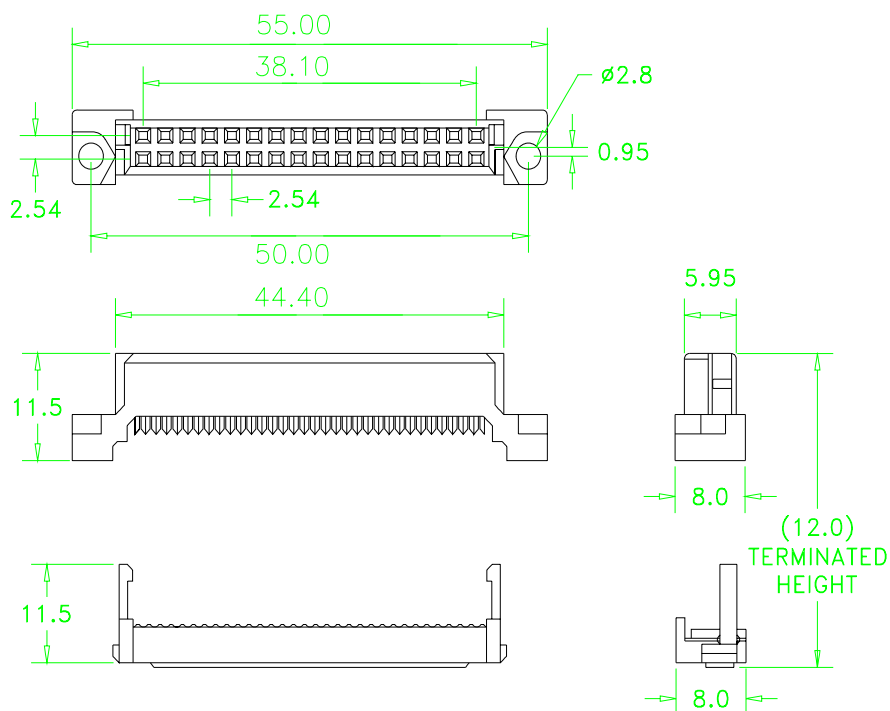

Ordering Information

720-	3100-	22	32-	S	.IDC
710 Series	1:Male;3:Female		32:32PIN	R:Right angle	
1:3Row;2:2Row	1:White			S:Straight	

710 AND 720 SERIES

DIN41612 IDC TYPE——48PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:1 AMP

Dielectric Withstanding Voltage:AC 500V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA


Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-3100-3248-S.IDC

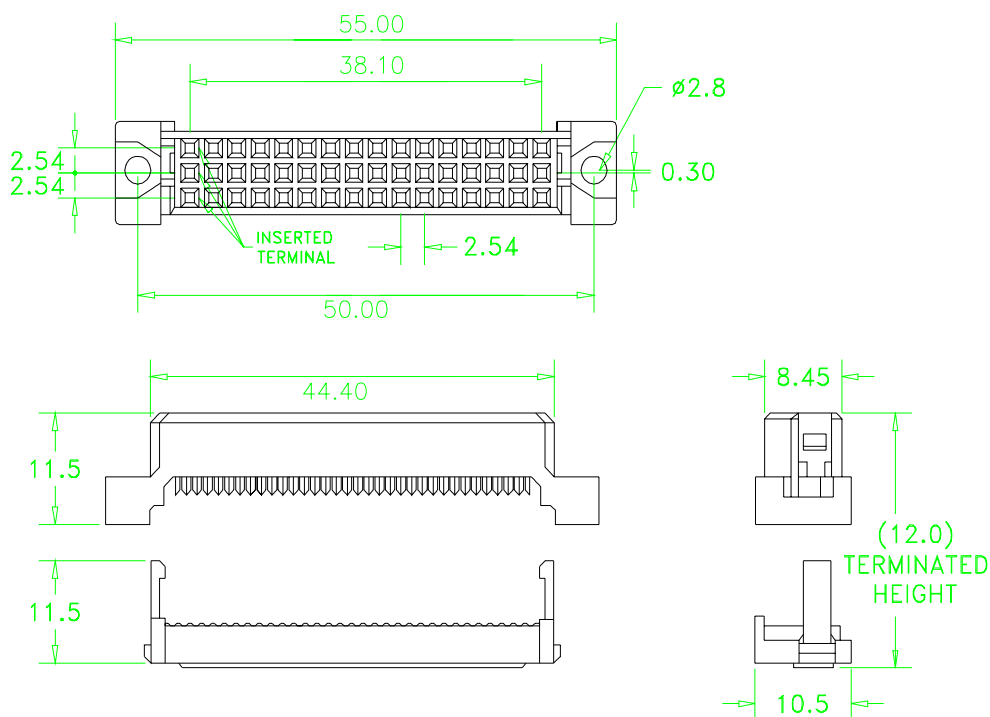

Ordering Information

710-	3100-	32	48-	S	.IDC
710 Series	1:Male;3:Female		48:48PIN	R:Right angle	
1:3Row;2:2Row	1:White			S:Straight	

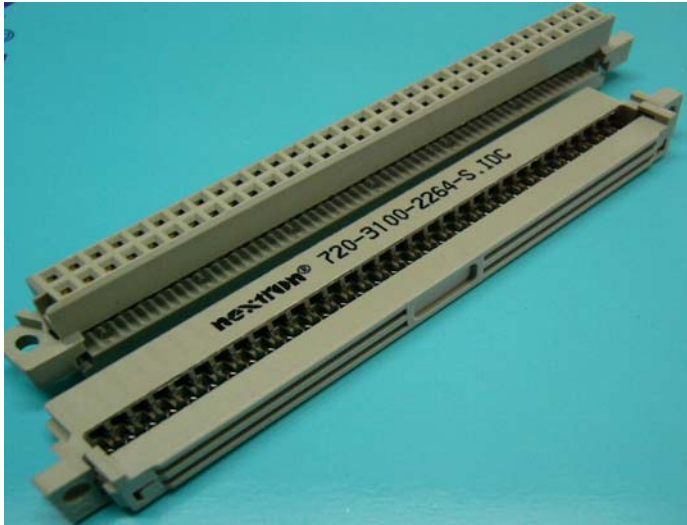

Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:1 AMP

Dielectric Withstanding Voltage:AC 500V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:720-3100-2264-S.IDC

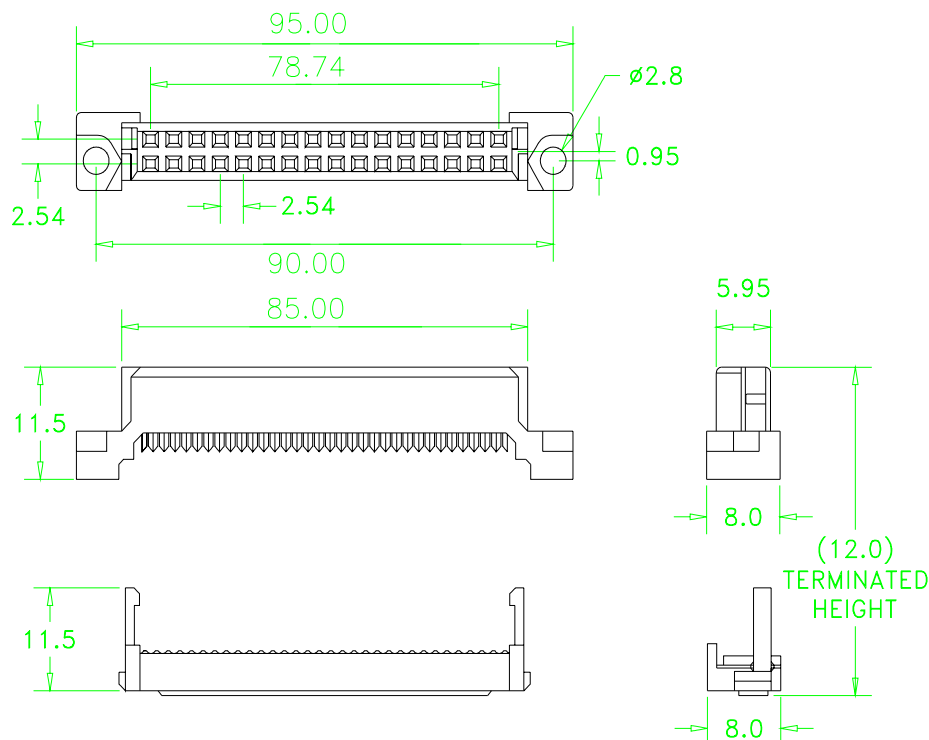

Ordering Information

720-	3100-	22	64-	S	.IDC
710 Series	1:Male;3:Female		64:64PIN	R:Right angle	
1:3Row;2:2Row	1:White			S:Straight	

710 AND 720 SERIES

DIN41612 IDC TYPE——96PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:1 AMP

Dielectric Withstanding Voltage:AC 500V

For one minute


Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing:

NO:710-3100-3296-S.IDC

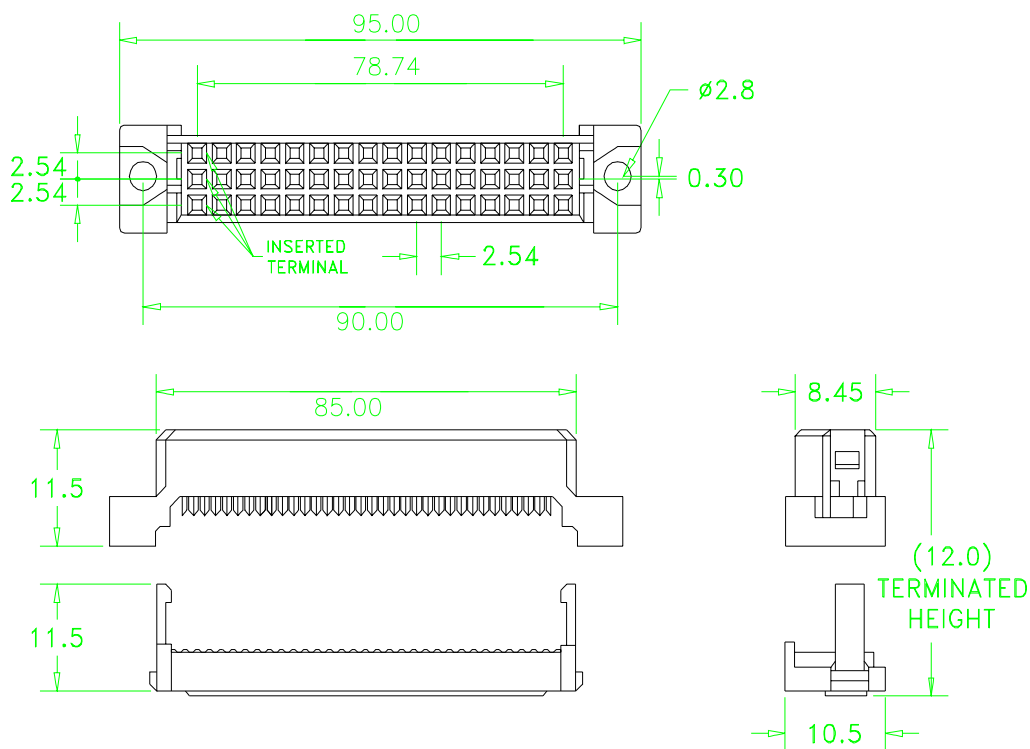

Ordering Information

710-	3100-	32	96-	S	.IDC
710 Series	1:Male;3:Female		96:96PIN	R:Right angle	
1:3Row;2:2Row	1:White			S:Straight	

710 AND 720 SERIES

DIN41612 IDC TYPE——32PIN FEMALE



Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:1 AMP

Dielectric Withstanding Voltage:AC 500V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-3100-3232-S.IDC

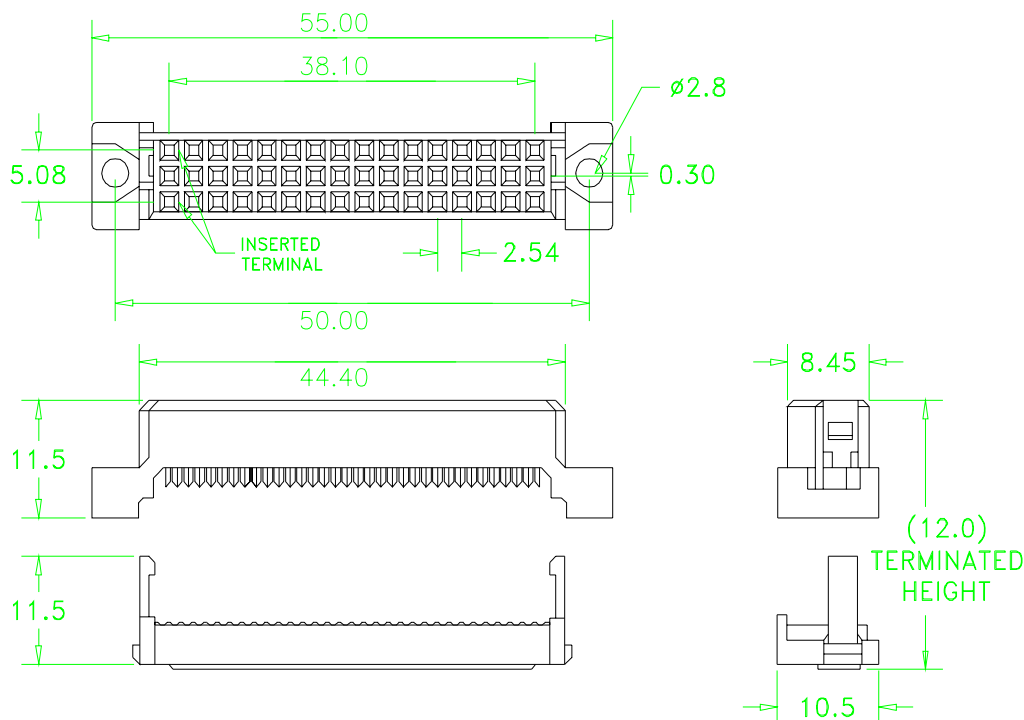


Ordering Information

710-	3100-	32	32-	S	.IDC
710 Series	1:Male;3:Female		32:32PIN	R:Right angle	
1:3Row;2:2Row	1:White			S:Straight	

710 AND 720 SERIES

DIN41612 IDC TYPE——64PIN FEMALE

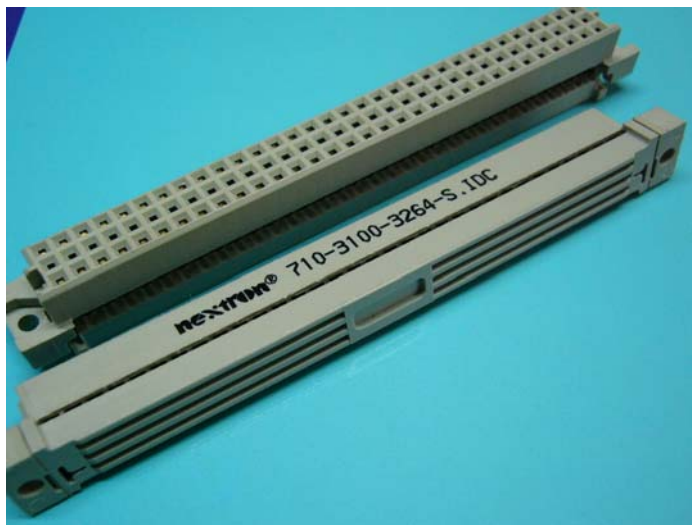

Material:

Housing:30% Glass filled PBT UL94V-0

Contacts:Brass

Electrical Characteristics

Current Rating:1 AMP

Dielectric Withstanding Voltage:AC 500V


For one minute

Insulator Resistance:1000M Ω min.at DC 500V

Contact Resistance:30m Ω max.at DC 100mA

Operating Temperature:-55℃ ~ +105℃

The Drawing: NO:710-3100-3264-S.IDC

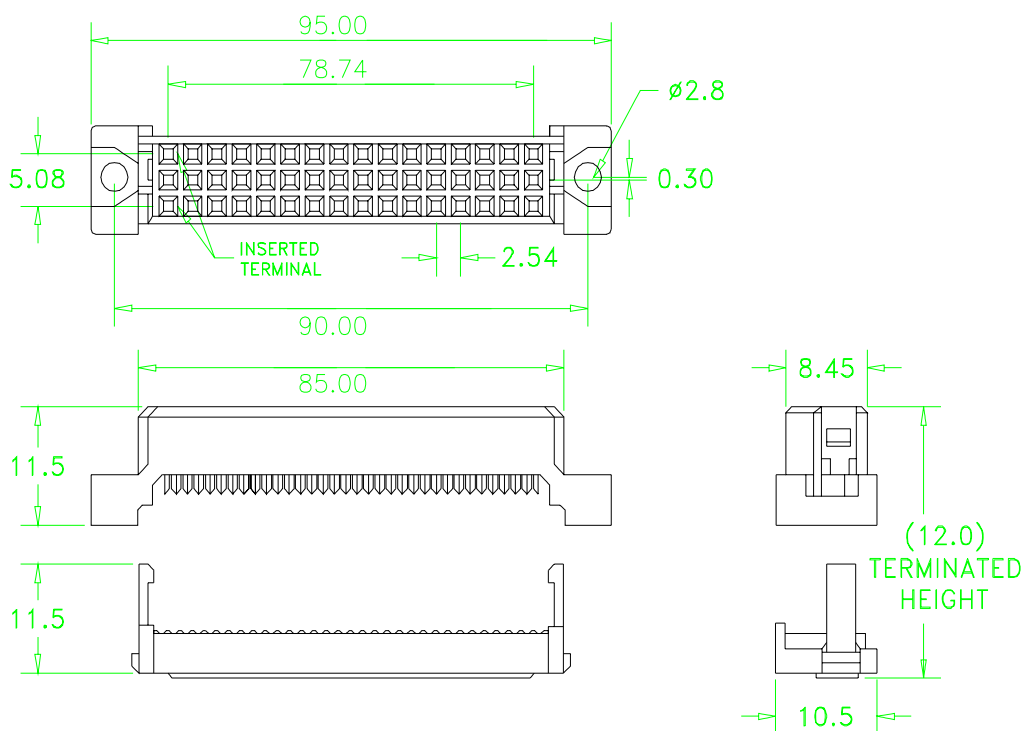

Ordering Information

710-	3100-	32	64-	S	.IDC
710 Series	1:Male;3:Female		64:64PIN	R:Right angle	
1:3Row;2:2Row	1:White			S:Straight	