

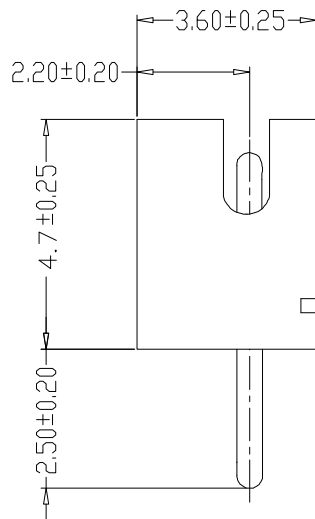
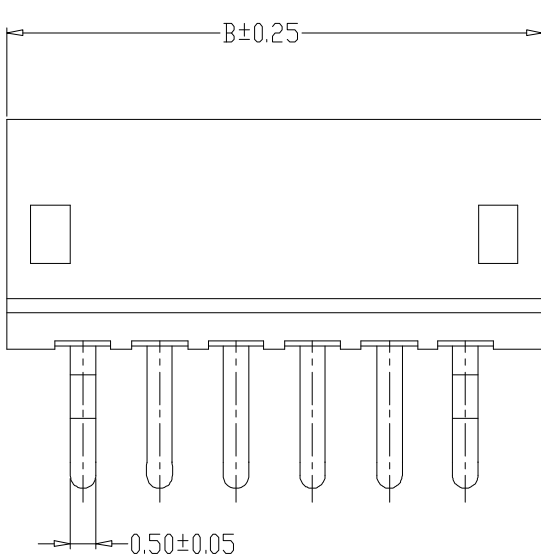




TYPE 1

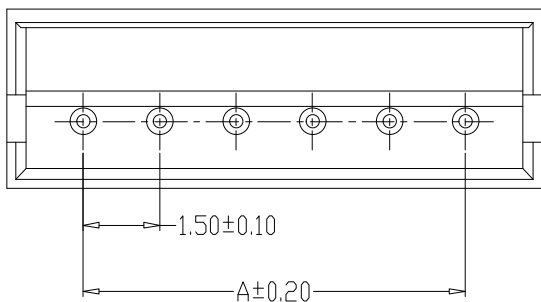

PCB LAYOUT

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 500MΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material:Wafer PBT,UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HC-ZH1.5-2A	1.50	4.50
HC-ZH1.5-3A	3.00	6.00
HC-ZH1.5-4A	4.50	7.50
HC-ZH1.5-5A	6.00	9.00
HC-ZH1.5-6A	7.50	10.50
HC-ZH1.5-7A	9.00	12.00
HC-ZH1.5-8A	10.50	13.50
HC-ZH1.5-9A	12.00	15.00
HC-ZH1.5-10A	13.50	16.50
HC-ZH1.5-11A	15.00	18.00
HC-ZH1.5-12A	16.50	19.50
HC-ZH1.5-13A	18.00	21.00
HC-ZH1.5-14A	19.50	22.50
HC-ZH1.5-15A	21.00	24.00
HC-ZH1.5-16A	22.50	25.50

制 图 DRAWN	变更内容 DESCRIPTION	日 期 DATE	GENERAL TOLERANCE		制 图 DRAWING	钱岳生 2013、07、01			料 号 PART NO.	ZH1.5直针		版 本 REV.	A
			X.±0.25	X.*±2°	审 核	张 名	品 名 TITLE	ZH直针 WAFER DIP TYPE	页 次 SHEET	1/1			
					CHECK	2013、07、03							
					核 准	张 名							
					APPROVAL	2013、07、05							
单 位 UNITS	MM	比 例 SCALE	1:1	深圳市华灿天禄电子有限公司									
.XXX±0.10	.XXX*±0.5°												