

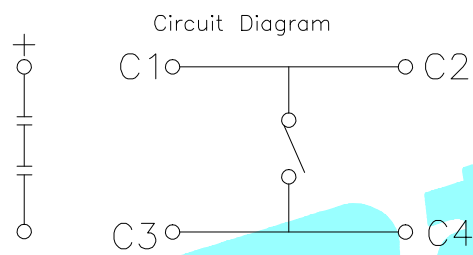
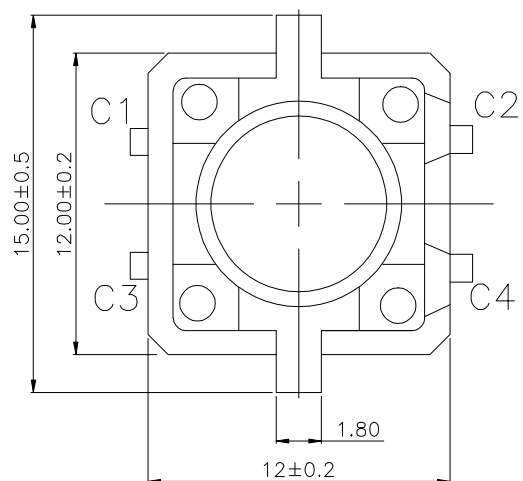
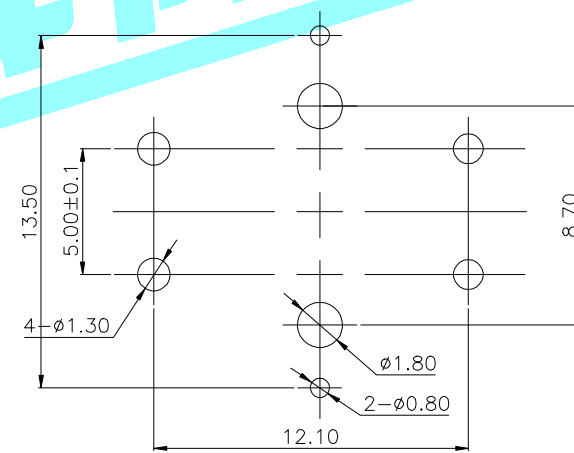


ROHS

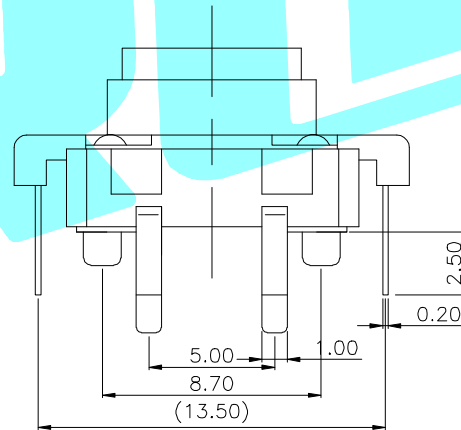

LEDcolour(LED颜色)	Part No.(料号)
White(白色)	K6-1212A01
Red(红色)	K6-1212A02
Blue(蓝色)	K6-1212A03
Green(绿色)	K6-1212A04
Yellow(黄色)	K6-1212A05
Orange(橙色)	K6-1212A06

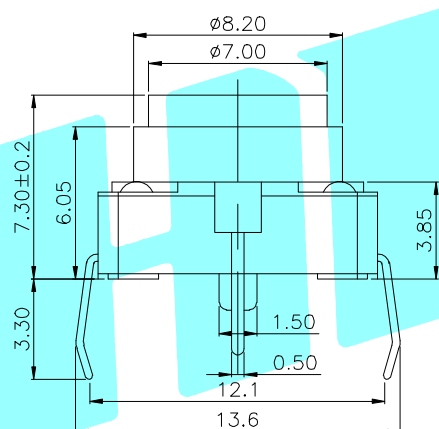

PCBLayout(pattern Side)

Typical Specifications
 1. Rating : DC 12V 50mA
 2. Operating Force : 250 ± 50 gf
 3. Contact Resistance : 100mΩMAX
 4. Life : 200,000 Cycles Min
 5. LED Life: 100,000 Hour Min

②	Terminal	——		Phosphor bronze	Ag Plating	——
①	Housing	——		Nylon	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	 ELECTRONICS CO.,LTD		
DRAWN	QIFEEG.XU	2013/11/11				
CHECKED				TITLE:	LED Tact Switch	
APPROVALS				PART NO.	K6-1212A	
TOLERANCES ARE		30~0.1	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
			±2°	DRAWING NO.	——	PROJ: 
						SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			