

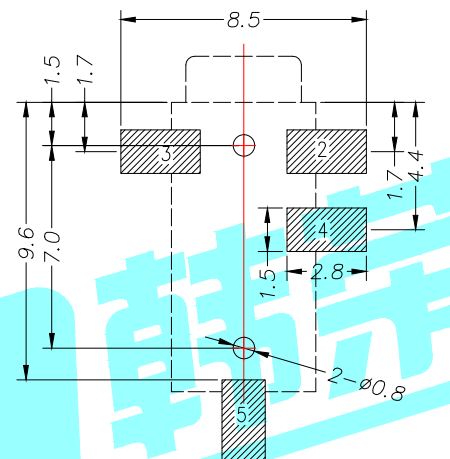
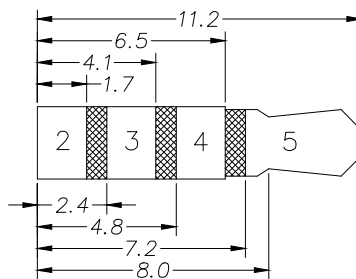
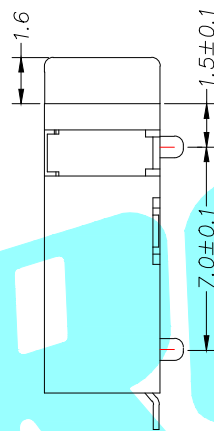

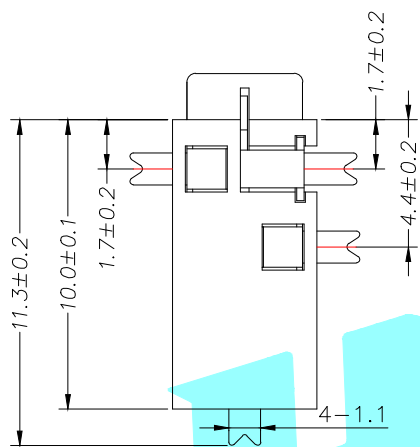


ROHS

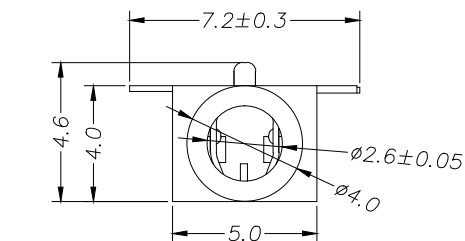

P.C.B LAYOUT(TOP view)



Rating:0.5A 30V DC
Contact Resistance:30 mΩ Max.
Operating temperature:-30℃~70℃
Operating force:3-20N
Operating Life:5,000cycles

②	Terminal	—	4	Phosphor bronze	Ag Plating	—
①	Housing	—	1	PPA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	HRO® ELECTRONICS CO.,LTD		
DRAWN	LIUCAN	2021.01.06		TITLE:	PHONE JACKS	
CHECKED				PART NO.	PJ-226	
APPROVALS				UNIT: mm	SCALE: 1:1	PROJ:
TOLERANCES ARE			30~以上 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10	ANGLE ±2'	DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			