


9001 Series

DIN41612 F Type Male

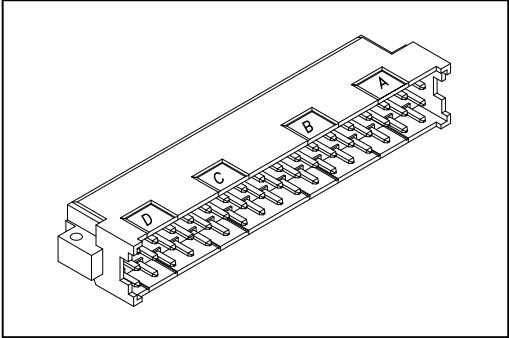

Material:


Housing: Thermoplastic Polyester Glass Filled UL94V-0
Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 5.6 A.
Dielectric Withstanding Voltage: AC 1550V.
Insulator Resistance: 1000M Ω min.
Contact Resistance: 15m Ω max.
Operating Temperature: -55°C ~+125°C.

Features:

* Mates with Female 3Row
9001-62481C, 9001-64481C

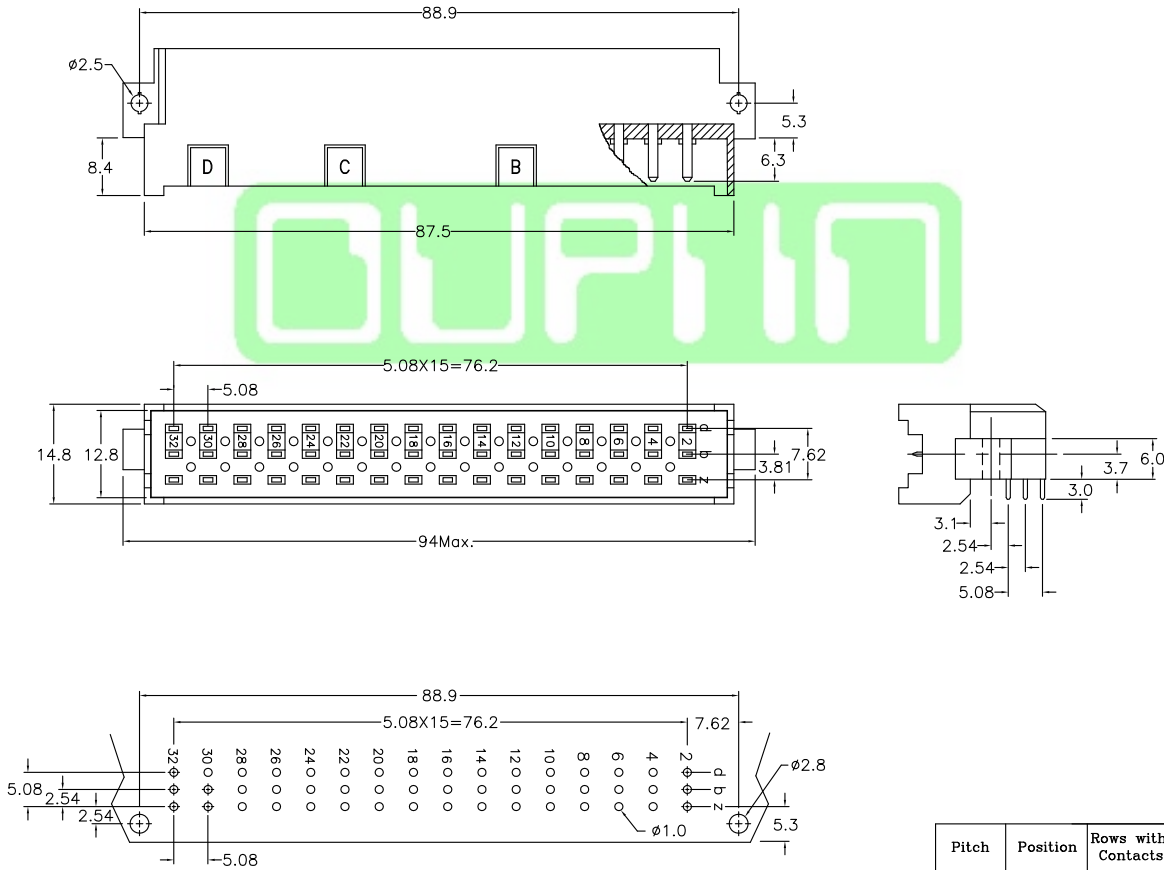

P.C. Board Layout

Pitch	Position	Rows with Contacts	Contact Arrange
5.08mm	48	z b d	
	32	z - d	
	16	z - -	

Ordering information

9001- 6 1 48 1 C 00 A
Series 1: Male Position 1: Dip Length C: Selective Gold Plated 00: G/F A: Tray Package