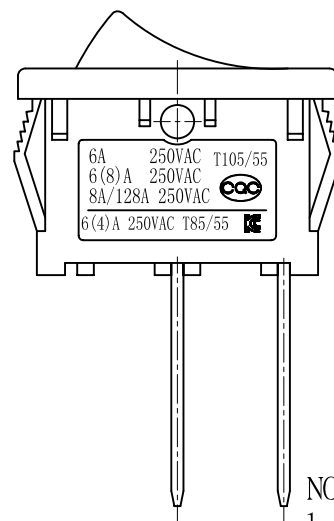
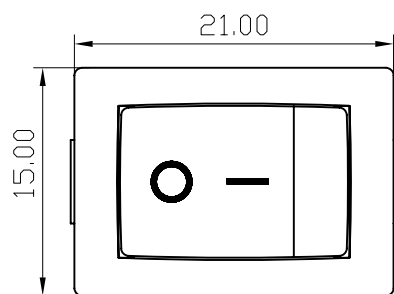
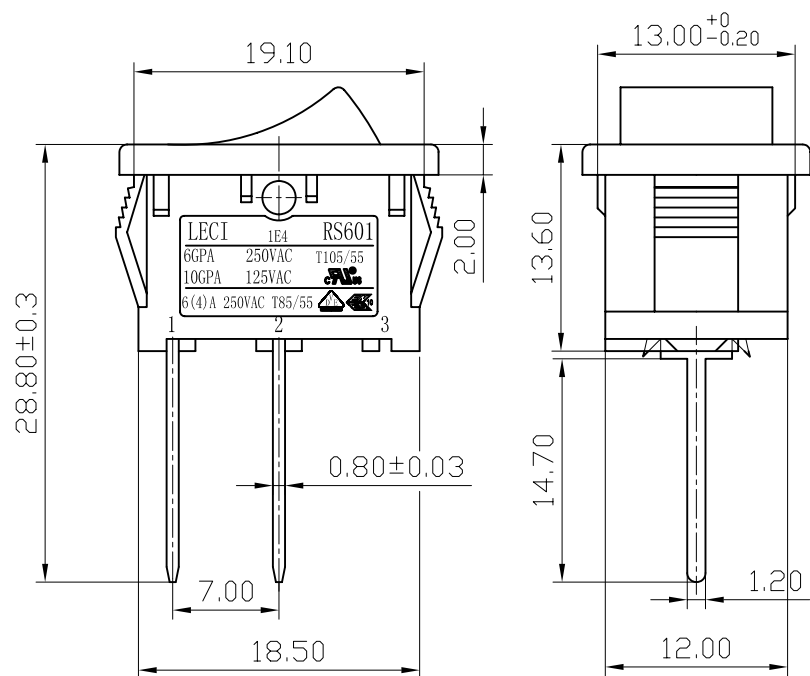


PANEL CUT-OUT

PANEL CUT-OUT		
Z	Y	X
0.70~1.25	12.90~13.10	18.9~19.1
1.25~2.00	12.90~13.10	19.1~19.2
2.00~3.00	12.90~13.10	19.3~19.4

NOTES:

1.Rating:

CQC 6A 250VAC 6(8)A 250VAC
8A/128A 250VAC T105/55

UL CUL 10GPA 125VAC

6GPA 250VAC T105/55

VDE ENEC 6(4)A 250VAC T85/55

KC 6(4)A 250VAC T85/55

2.Circuit Diagram:2P ON-OFF

3.Terminal Strength:≥80N

4.Electrical life:≥10000 cycles

5.Withstand Voltage:Withstand Voltage:1500VAC 1min Terminals to Button:3000VAC 1min


6.Leakage Current:1mA

7.Current resistance:≤50mΩ(initial)

8.Insulation resistance:≥100MΩ

9.Body Materil:NYLON 66 94V-2~0

SWITCHING CIRCUIT



A4				普通公差：		深圳市华灿天禄电子有限公司							
A3				COMMON TOLERANCE：									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	跷板开关	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	周 金 勇	核 对 CHECKED BY	梁 金 勇	型 号 MODEL NO.	RS601		
				ABOVE 30	±0.50								
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期 DATE	2016.1.20	核 准 APPROVAL BY	周 培 雷	图 号 DWG NO.	RS601A-1010015BB		