
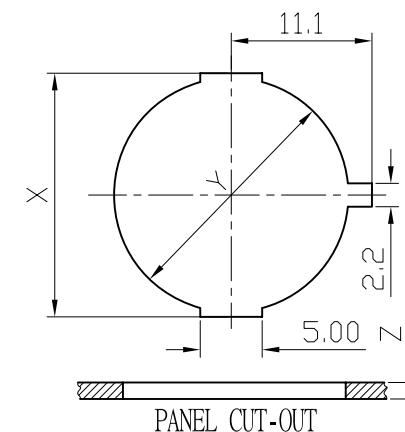


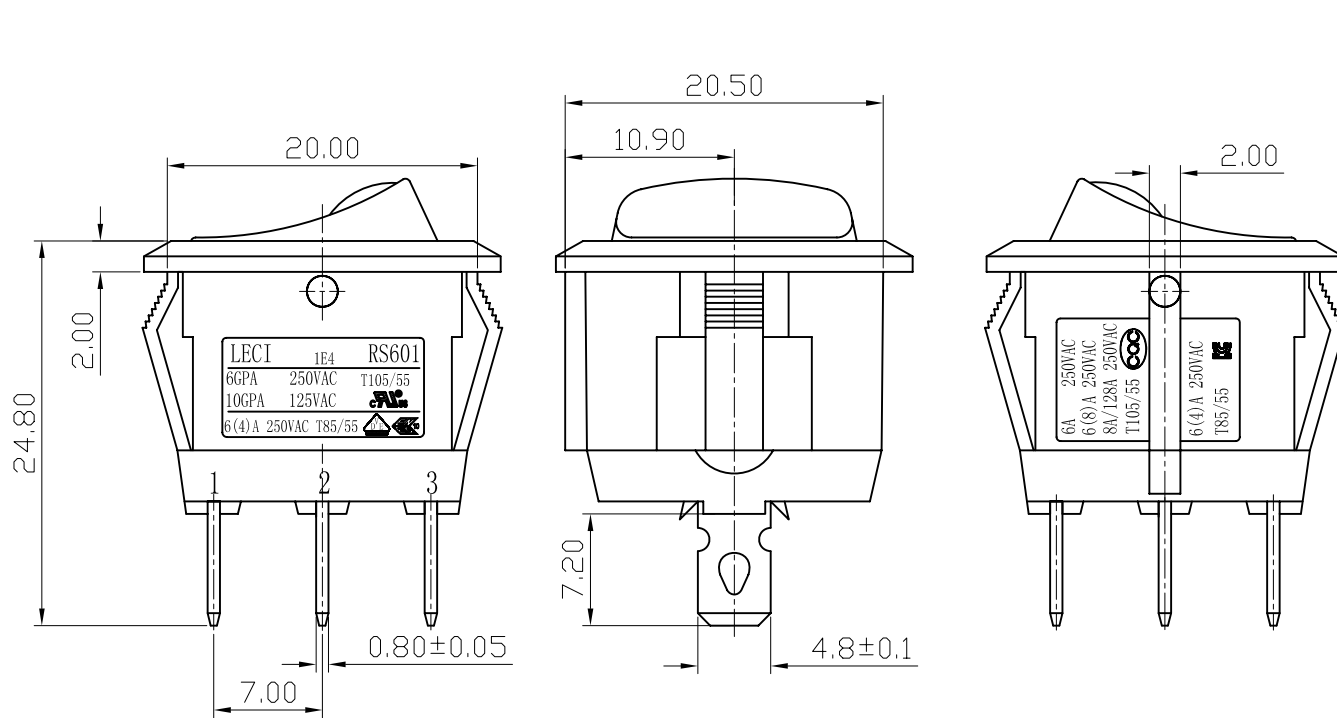

PANEL CUT-OUT		
Z	X	Y
0.70~1.25	19.90~20.30	19.4~19.5
1.25~2.00	20.40~20.70	19.4~19.5
2.00~3.00	20.80~21.10	19.4~19.5

NOTES:

1.Rating:

CQC 6A 250V AC T105/55

6(8)A 250VAC

8A/128A 250VAC

cUL 10GPA 250V AC

6GPA 125V AC T105/55

VDE ENEC 6(4)A 250V AC T85/55

KC 6(4)A 250V AC T85/55

2.Circuit Diagram:3P ON-OFF

3.Terminal Strength:≥80N

4.Electrical life:≥10000 cycles

5.Withstand Voltage:Withstand Voltage:1500VAC 1min



Terminals to Button:3000VAC 1min

Leakage Current:1mA

6.Current resistance:≤50mΩ(initial)

7.Insulation resistance:≥100MΩ

8.Body Materil:NYLON 66 94V-0~2

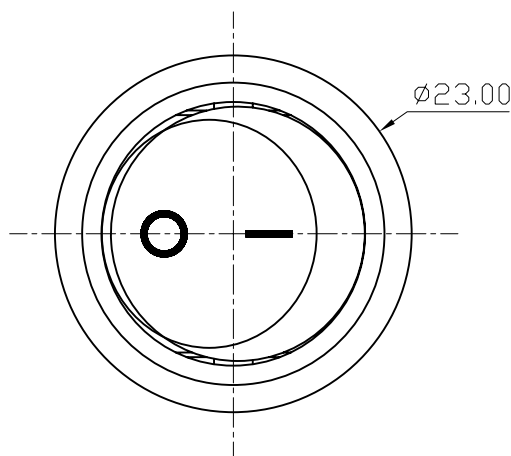

A4				普通公差:		深圳市华灿天禄电子有限公司							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位 UNIT	mm	投 影 PROJECTED		品 名 PRODUCT NAME	跷板开关	比 例 SCALE	Free
A1				ABOVE 5 TO 30	±0.30	绘 图 DRAWN BY	周金勇	核 对 CHECKED BY	梁金勇	型 号 MODEL NO.	RS601		
				ABOVE 30	±0.50								
REV.	DATE	REVISION DESCRIPTION	ISSUE	ANGULAR	±5°	日 期 DATE	2015.10.26	核 准 APPROVAL BY	周培雷	图 号 DWG NO.	S601C-101N011RB		