






SPECIFICATIONS

Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au Or Tin Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

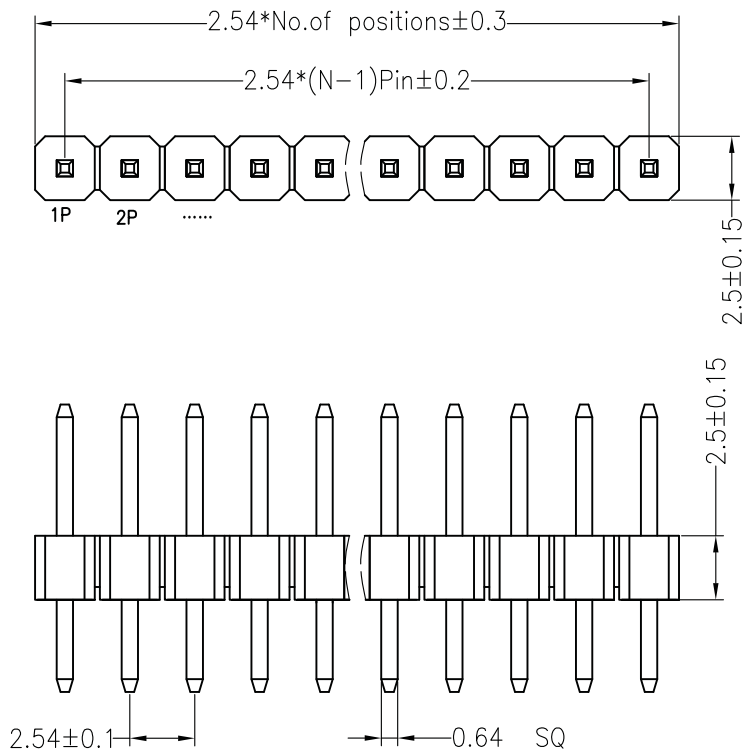

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

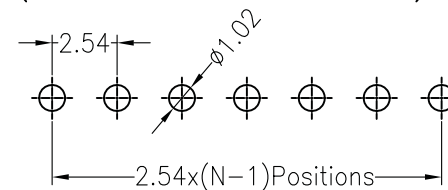

Dimension antitheses list			
ITEM	PA	PC	L
Standard	6.0	3.00	11.50
Alternate			

深圳市华灿天禄电子有限公司

PART NO.

PZ254-1-N-Z-8.5

TITLE:

2.54mm Pin Header 2.5mm Single 180°

OPERATION

X.X

±0.30

X.XX

±0.20

X.XXX

±0.10

Angle

±3°

DIM

TOL

CHECK

APPROVE

DRAW

YiYuSheng

12.03.28

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

A0 2012.03.28

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

DIM

TOL

CHECK

APPROVE

DRAW

YiYuSheng

12.03.28

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

◆

PART NO.

PZ254-1-N-Z-8.5

TITLE:

2.54mm Pin Header 2.5mm Single 180°