

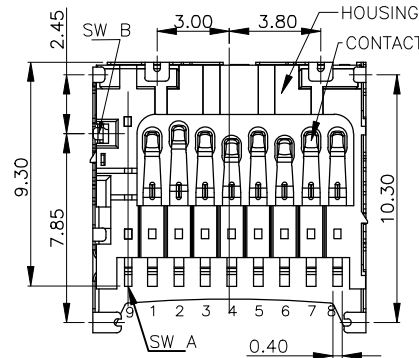






REV.	ECN NO OR DESCRIPTION	REVISED	DATE


WITHOUT CARD	
INSERTING CARD	

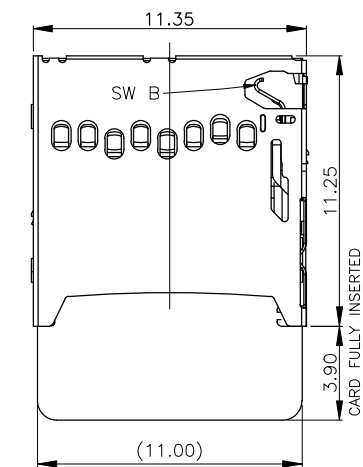

PIN NO.	NAME	YTYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

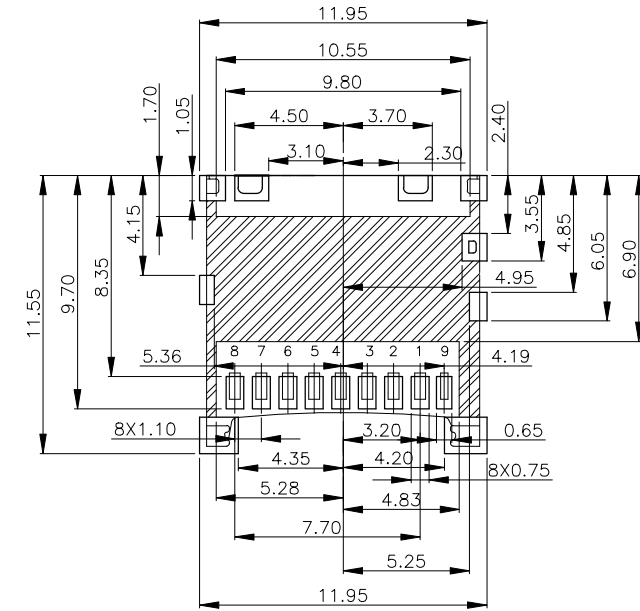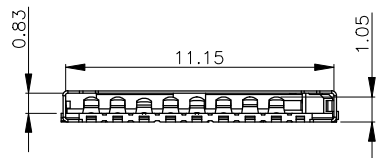

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

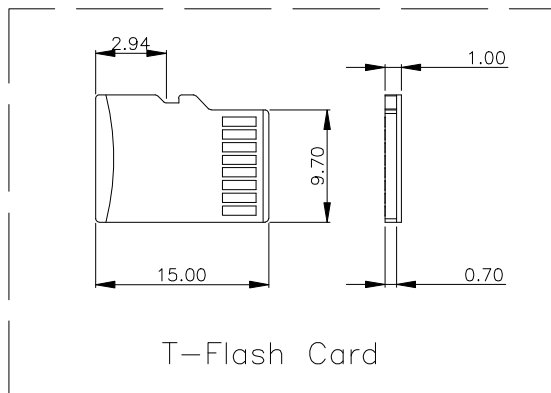

- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS**
 - 1-1. CONTACT RESISTANCE: 80 milliohms MAX.
 - 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - MECHANICAL CHARACTERISTICS**
 - 2-1. RETENTION FORCE: MIN.100gf/PIN
 - 2-2. DURABILITY: 5,000 CYCLES
 - RoHS 2002/95/EC COMPLIANT.**

E	SW-B	1	STAINLESS STEEL	Ni/Au PLATING
D	SW-A	1	COPPER ALLOY	Ni/Au PLATING
C	SHELL-A	1	STAINLESS STEEL	Ni/Au PLATING
B	CONTACT	8	COPPER ALLOY	Gold Flash On Contact Area Tin plated on Solder tail All over Nickel Plated .
A	HOUSING	1	HIGH-TEMPERATURE PLASTIC UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFED TOLERANCES			 东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD	
DECIMALS: ANGLES:			TITLE T-FCARD CONN SMT 9P 1.32H	
X :±0.5 X :±2°	DWN xiong TF-020			
X.X :±0.20 X.X :±1°	CHKD lee SCALE:1:1 UNIT: mm 			
X.XX :±0.10	APVD wang SIZE: A4 SHEET:1OF 1 REV: A4			
CUSTOMER COPY				