
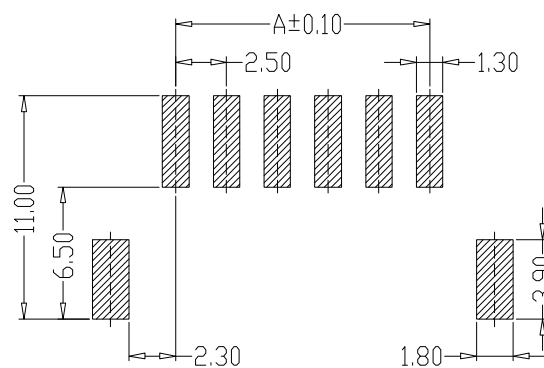


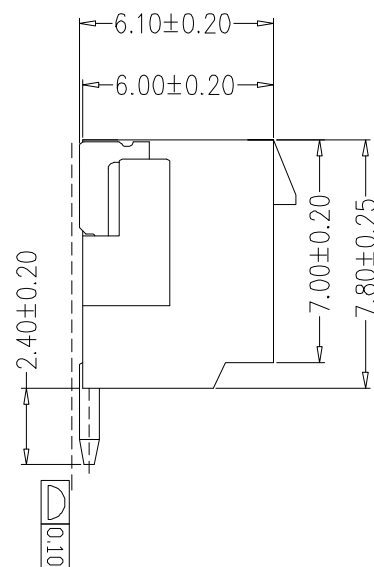

PCB LAYOUT

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1000V AC/minute
- 7、Material: Wafer LCP, UL94V-0
PIN Brass Tin-plated
Solder tad Brass Tin-plated

编 号	尺寸 (mm)		
	A	B	C
HC-HA-2AWT	2.50	7.50	10.00
HC-HA-3AWT	5.00	10.00	12.50
HC-HA-4AWT	7.50	12.50	15.00
HC-HA-5AWT	10.00	15.00	17.50
HC-HA-6AWT	12.50	17.50	20.00
HC-HA-7AWT	15.00	20.00	22.50
HC-HA-8AWT	17.50	22.50	25.00
HC-HA-9AWT	20.00	25.00	27.50
HC-HA-10AWT	22.50	27.50	30.00
HC-HA-11AWT	25.00	30.00	32.50
HC-HA-12AWT	27.50	32.50	35.00

制 图 DRAWN	变 更 内 容 DESCRIPTION	日 期 DATE	GENERAL TOLERANCE		制 图 DRAWING	钱岳生 2013、07、01			料 号 PART NO.	HC-HA-AWNT		版 本 REV.	A					
			X.±0.25	X.°±2°		审 核 CHECK	张 名 2013、07、03			品 名 TITLE	贴片			页 次 SHEET	1/1			
			.X±0.20	.X°±1°			核 准 APPROVAL				客户料号 CUTM NO.							
			.XX±0.15	.XX°±0.5°			张 名 2013、07、05											
			.XXX±0.10	.XXX°±0.5°			单 位 UNITS	MM										比 例 SCALE
深圳市华灿天禄电子有限公司																		

深圳市华灿天禄电子有限公司