





- SPECIFICATIONS
- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 10mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltang: 1000V AC/minute
 - 7、Material:Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
HC-XHB-2A	2.50	7.50
HC-XHB-3A	5.00	10.00
HC-XHB-4A	7.50	12.50
HC-XHB-5A	10.00	15.00
HC-XHB-6A	12.50	17.50
HC-XHB-7A	15.00	20.00
HC-XHB-8A	17.50	22.50
HC-XHB-9A	20.00	25.00
HC-XHB-10A	22.50	27.50
HC-XHB-11A	25.00	30.00
HC-XHB-12A	27.50	32.50
HC-XHB-13A	30.00	35.00
HC-XHB-14A	32.50	37.50
HC-XHB-15A	35.00	40.00
HC-XHB-16A	37.50	42.50

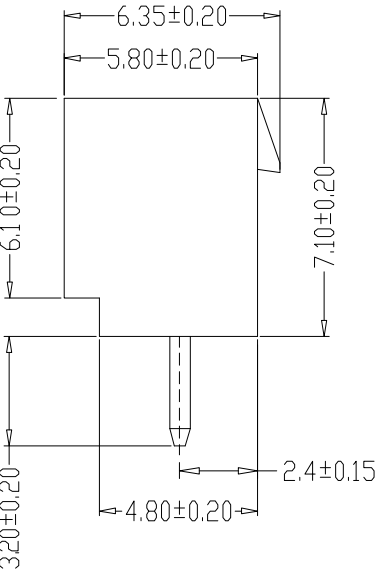

PCB LAYOUT

2-6A

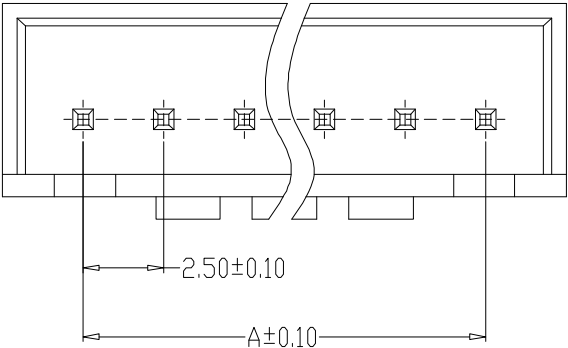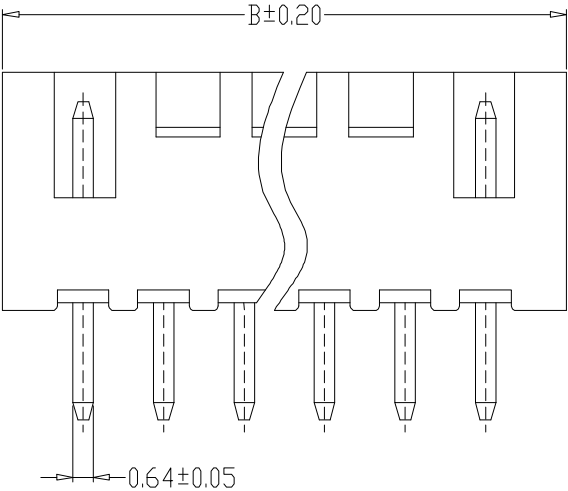

联系方式 18058866958

GENERAL TOLERANCE		制 图		林月旺		料 号	XHB-NA		版 本	A
X.±0.25	X.*±2°	审 核		李攀进		品 名	带扣直针座		页 次	
.X±0.20	.X*±1°	核 准		罗观彬		TITLE			SHEET	
.XX±0.15	.XX*±0.5°					客户料号			1/1	
.XXX±0.10	.XXX*±0.5°	单 位		MM	比 例	深圳市华灿天禄电子有限公司				
		UNITS		SCALE	1:1					
						CUTM. NO.				