
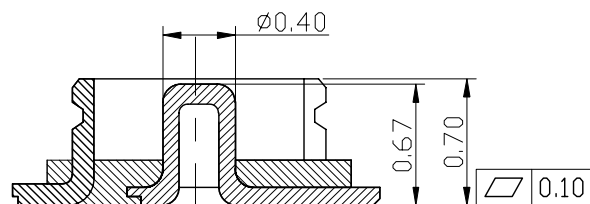
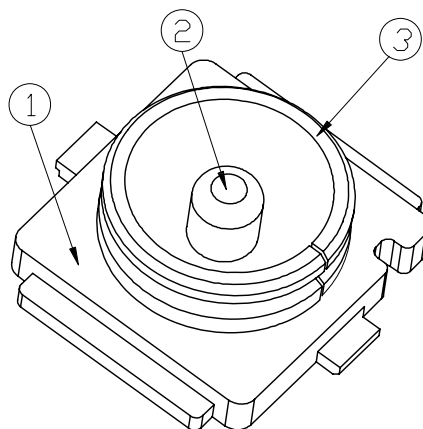




Kinghelm®

型号: KH-IPEX3-2020

REV	ECN NO.	APPD
A	ECN1211001	MAX

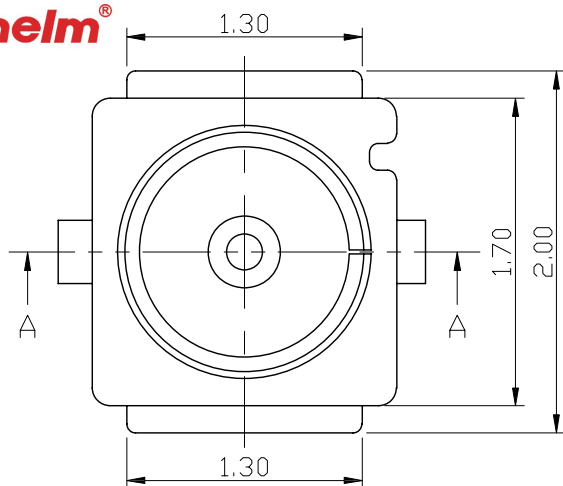

Section: A-A

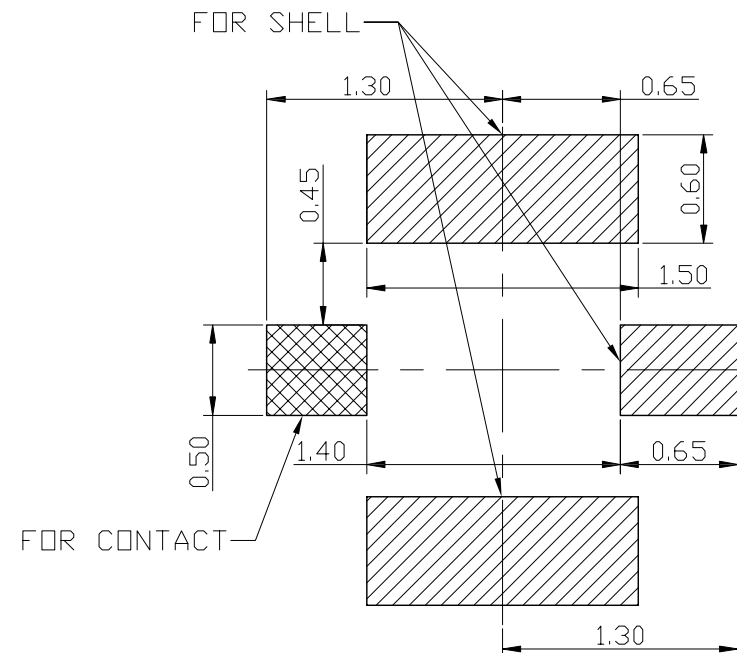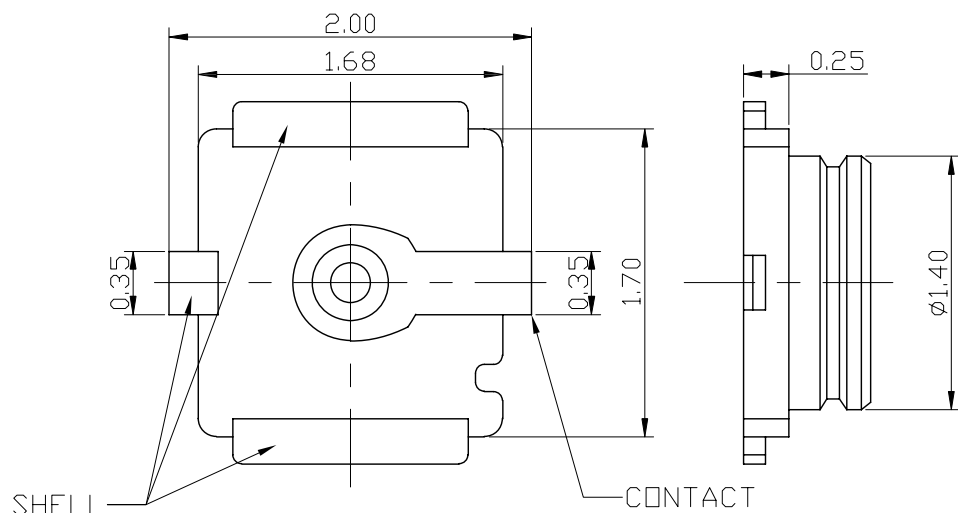

Contact Pad Shell Pad

P.C.B Layout

NOTE: UNLESS OTHERWISE SPECIFIED

1. DIMENSION SHALL BE INTERPRETED PER ANSI Y14.5M-1994.
2. DIMENSION MARKED WITH "▼" SHOULD SPECIFIED ON INSPECTION PLAN.
3. CONTACT RETENTION FORCE: 0.2 N MIN.
4. CONTACT MATERIAL: COPPER ALLOY.
5. INSULATOR: HIGH TEMPERATURE PLASTIC UL94 V-0.
6. LOW PROFILE: 1.5MM MAX. MATING HEIGHT.
7. APPLICATION FREQUENCY UP TO 6 G HZ.

3	SHELL	1	COPPER ALLOY	Ni: 50u"~100u"/Tin Plating	
2	CONTACT	1	COPPER ALLOY	Ni: 50u"~100u"/Gold Flash	
1	HOUSING	1	LCP(BLACK)	UL94V-0	
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH	REMARK

深圳市金航标电子有限公司		WWW.BDS666.COM			
型号: KH-IPEX3-2020		0755-83044319		DWG NO.:	
.X± 0.25	.X± 5'	APPD: Max 11/2'12		PARTING: :	
.XX± 0.25	.XX± 3'	CHKD: Max 11/2'12			
.XXX±	.XXX± 1'	DR: Andy 11/2'12			
				UNITS	SCALE
				mm	1:1
				SHEET	REV.
				1/1	A