

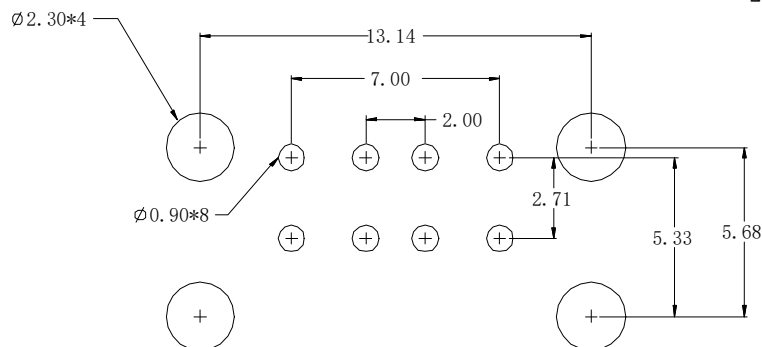
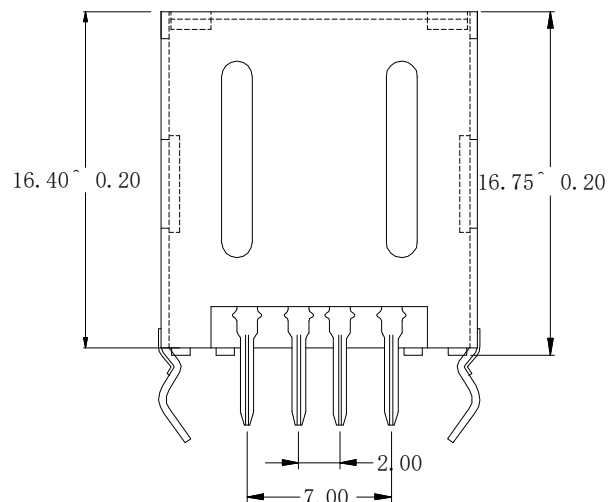


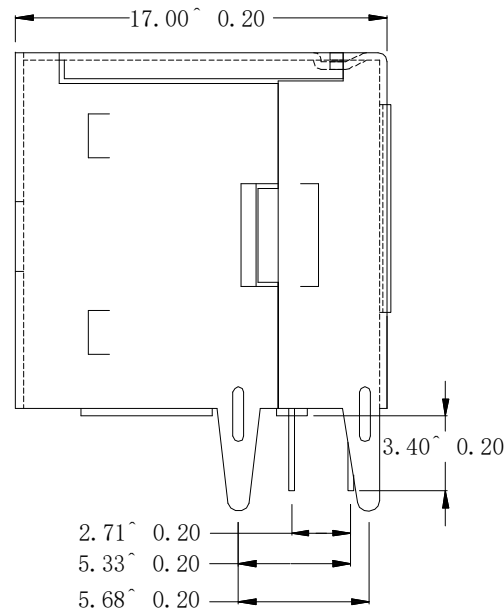

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

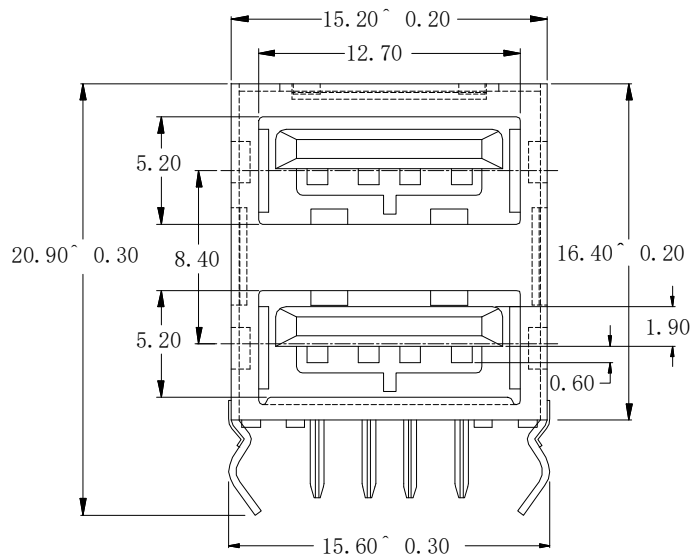

HIJK :Specifications:

3EFG :Electrical:

- 1.AB3DC Current Rating
1.5 A/contact terminal
- 2.AB3>C Voltage Rating
30V DC
- 3.?@;< :Contact Resistance
30 milliohms MAX
- 4.=3> :Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
- 5.9:;< :Lnsulation Resistance:
1000MEGA ohms MIN

78. :Matarial:

- 1.56 :Housing:
Hing Temperature Tnermaplastics,
UL 94V-0 PBT White/Black

2.12 :Contact:Copper Alloy C2680

3.*+ :Shell: Copper Alloy C2680/SPCC

34 :Finish:

- 1.12 :Contact: Piated Gold in Mating Area;
Tin On Solder Talls

2.*+ :Shell:
Nickel Plating

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.30 X :±2°
X.X :±0.20 X.X :±1°
X.XX :±0.10



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	USB AF 90度双层全包			
DWN	xiong	PART NO. USB-U267-BWS		
CHKD	lee	SCALE:1:1	UNIT: mm	REV: A4
APVD	wang	SIZE: A4	SHEET:10F 1	REV: A4

CUSTOMER COPY