



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C


Contact Material:Brass

Contact Plating:Au or Sn Over Ni





Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

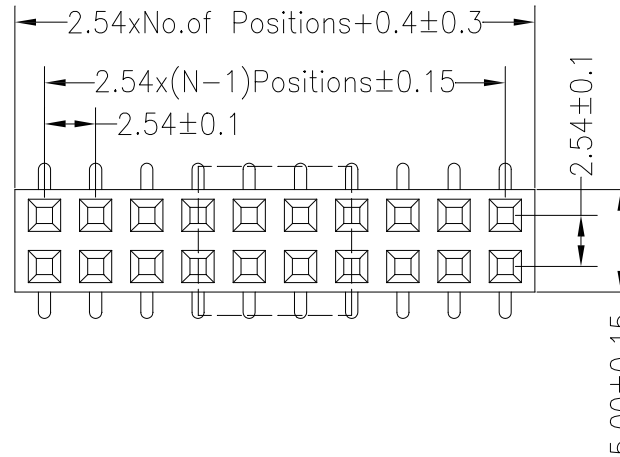

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

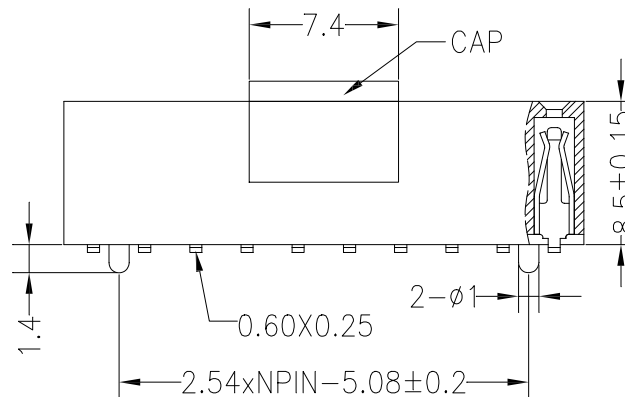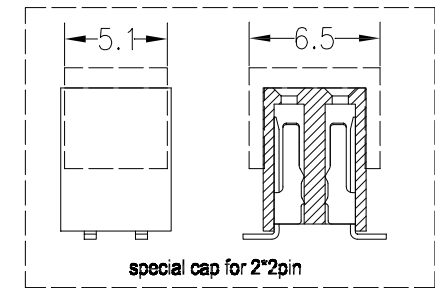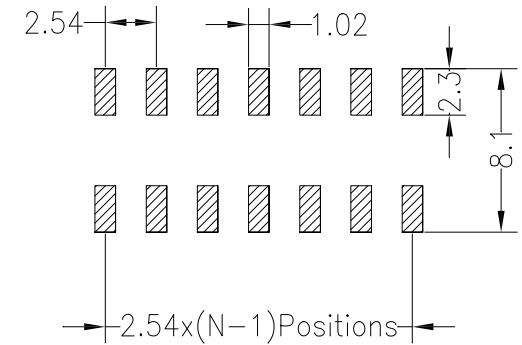

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

BEN

12.09.25

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

PROJ.

深圳市华灿天禄电子有限公司

PART NO.

PM254-2-N-S-8.5

TITLE:

2.54PF 2xNpin SMT

REV DATE MODIFICATION DESCRIPTION

CHANGE