

SPECIFICATIONS

Rated Current:1.5AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃


Contact Material:Brass

Contact Plating:Au or Sn Over Ni




Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

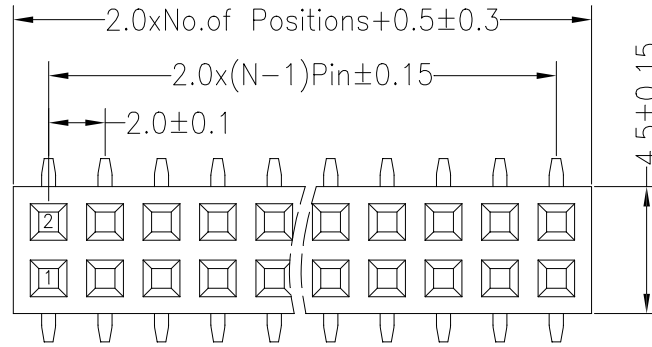

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

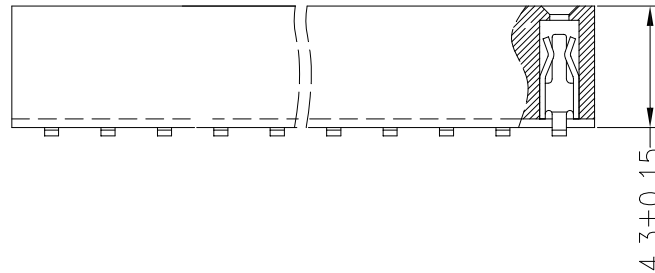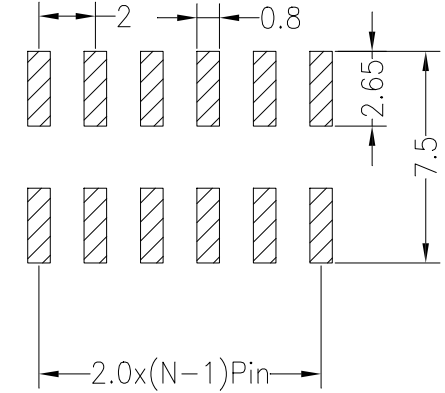

W= With Post

				OPERATION		DRAW	YiYuSheng	12.07.23	SCALE	FIT	深圳市华灿天禄电子有限公司	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	PM200-2-N-S-4.3
A0	2012.07.23	NEW DRAWING		X.XXX	±0.10				SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	Angle	APPROVE			PROJ.	1/1	TITLE:	2.00PF H4.3mm 2xNpin SMT W4.50
					TOL							