



SPECIFICATIONS

Rated Current:1.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:500V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃



Contact Material:Phosphor Bronze

Contact Plating:Au Over Ni



Insulator Material:Polyester(UL94V-0)

Standard: PA9T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

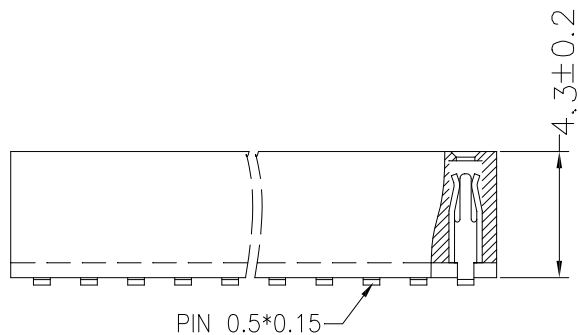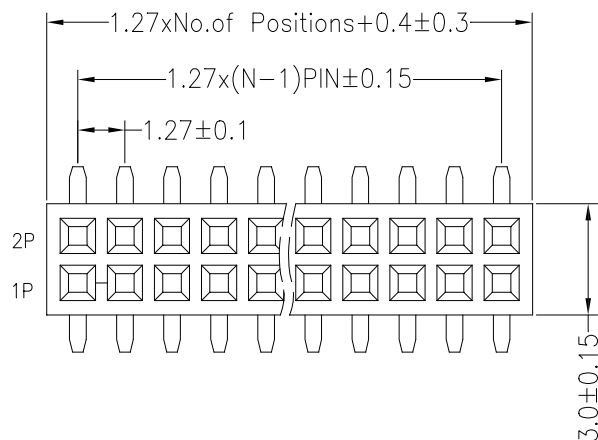

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

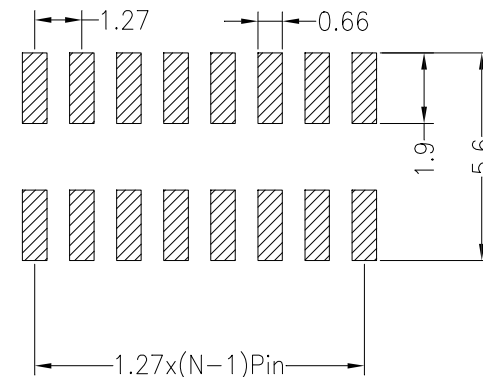

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

BEN

12.04.18

SCALE

FIT

UNIT

mm

SIZE

A4

SHEET

1/1

PROJ.

PROJ.

深圳市华灿天禄电子有限公司

PART NO.

PM127-2-N-S-4.3

TITLE:

1.27PF 2xNPin H4.3

A0 2012.04.18 NEW DRAWING

REV DATE MODIFICATION DESCRIPTION

CHANGE