


## Description

The 5.0SMDJ series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. For surface mounted applications in order to optimize board space.

## Features

- Halogen free and RoHS compliant
- Low profile package
- Built-in strain relief design
- Low inductance
- Excellent clamping capability
- 5000W peak pulse power capability at 10/1000 $\mu$ s waveform, repetition rate (duty cycle): 0.01%
- Fast response time
- Typical  $I_R$  less than 2 $\mu$ A above 22V devices
- Peak 260 $^{\circ}$ C high temperature Reflow Soldering withstanding
- Meet MSL level1, per J-STD-020
- IEC-61000-4-2 ESD 30kV(Air), 30kV (Contact)
- Unit Weight: 0.30g



## Applications

TVS components are ideal for the protection of I/O Interfaces, VCC bus and other vulnerable circuits used in telecom, computer, Industrial and consumer electronic applications.

## Maximum Ratings and Characteristics ( $T_A=25^{\circ}\text{C}$ )

| Rating                                                                                                            | Symbol          | Value                                           |
|-------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------|
| Peak pulse power dissipation at 10/1000 $\mu$ s waveform (Note1, Note2, Fig.1)                                    | $P_{PPM}$       | 5000W                                           |
| Peak pulse current of at 10/1000 $\mu$ s waveform (Note 1, Fig.3)                                                 | $I_{PPM}$       | See Table(A)                                    |
| Steady state power dissipation at $T_A=50^{\circ}\text{C}$ (Fig.5)                                                | $P_{M(AV)}$     | 6.5W                                            |
| Maximum Instantaneous Forward Voltage at 100A for Unidirectional Only                                             | $V_F$           | 3.5V/5.0V                                       |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method) (Note3, Fig.6) | $I_{FSM}$       | 300A                                            |
| Operating junction and Storage Temperature Ranges                                                                 | $T_J, T_{STG}$  | $-55^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Typical thermal resistance junction to lead                                                                       | $R_{\theta JL}$ | 15 $^{\circ}\text{C/W}$                         |
| Typical thermal resistance junction to ambient                                                                    | $R_{\theta JA}$ | 75 $^{\circ}\text{C/W}$                         |

Notes:1. Non-repetitive current pulse, per Fig.3 and derating above  $T_A=25^{\circ}\text{C}$  per Fig.2.

2. Each terminal is surface Mounted on the 8.0mm $\times$ 8.0mm copper pads.

3. 8.3ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minutes maximum.

4.  $V_F < 3.5\text{V}$  for single die parts and  $V_F < 5.0\text{V}$  for stacked-die parts.

## Electrical Characteristics (T<sub>A</sub>=25°C)

| Part Number |             | Device Marking Code |      | Reverse Stand-Off Voltage | Breakdown Voltage @I <sub>T</sub> |                         | Test Current        | Maximum Clamping Voltage @I <sub>PP</sub> | Peak Pulse Current  | Reverse Leakage @V <sub>R</sub> |
|-------------|-------------|---------------------|------|---------------------------|-----------------------------------|-------------------------|---------------------|-------------------------------------------|---------------------|---------------------------------|
| Uni.        | Bi.         | Uni.                | Bi.  | V <sub>R</sub> (V)        | V <sub>B Min.</sub> (V)           | V <sub>B Max.</sub> (V) | I <sub>T</sub> (mA) | V <sub>C</sub> (V)                        | I <sub>PP</sub> (A) | I <sub>R</sub> (μA)             |
| 5.0SMDJ11A  | 5.0SMDJ11CA | 5PEN                | 5BEN | 11.0                      | 12.20                             | 13.50                   | 10                  | 18.2                                      | 275.0               | 800                             |
| 5.0SMDJ12A  | 5.0SMDJ12CA | 5PEP                | 5BEP | 12.0                      | 13.30                             | 14.70                   | 10                  | 19.9                                      | 252.0               | 800                             |
| 5.0SMDJ13A  | 5.0SMDJ13CA | 5PEQ                | 5BEQ | 13.0                      | 14.40                             | 15.90                   | 10                  | 21.5                                      | 233.0               | 500                             |
| 5.0SMDJ14A  | 5.0SMDJ14CA | 5PER                | 5BER | 14.0                      | 15.60                             | 17.20                   | 10                  | 23.2                                      | 216.0               | 200                             |
| 5.0SMDJ15A  | 5.0SMDJ15CA | 5PES                | 5BES | 15.0                      | 16.70                             | 18.50                   | 1                   | 24.4                                      | 205.0               | 100                             |
| 5.0SMDJ16A  | 5.0SMDJ16CA | 5PET                | 5BET | 16.0                      | 17.80                             | 19.70                   | 1                   | 26.0                                      | 193.0               | 50                              |
| 5.0SMDJ17A  | 5.0SMDJ17CA | 5PEU                | 5BEU | 17.0                      | 18.90                             | 20.90                   | 1                   | 27.6                                      | 181.0               | 20                              |
| 5.0SMDJ18A  | 5.0SMDJ18CA | 5PEV                | 5BEV | 18.0                      | 20.00                             | 22.10                   | 1                   | 29.2                                      | 172.0               | 10                              |
| 5.0SMDJ20A  | 5.0SMDJ20CA | 5PEW                | 5BEW | 20.0                      | 22.20                             | 24.50                   | 1                   | 32.4                                      | 155.0               | 5                               |
| 5.0SMDJ22A  | 5.0SMDJ22CA | 5PEX                | 5BEX | 22.0                      | 24.40                             | 26.90                   | 1                   | 35.5                                      | 141.0               | 5                               |
| 5.0SMDJ24A  | 5.0SMDJ24CA | 5PEZ                | 5BEZ | 24.0                      | 26.70                             | 29.50                   | 1                   | 38.9                                      | 129.0               | 2                               |
| 5.0SMDJ26A  | 5.0SMDJ26CA | 5PFE                | 5BFE | 26.0                      | 28.90                             | 31.90                   | 1                   | 42.1                                      | 119.0               | 2                               |
| 5.0SMDJ28A  | 5.0SMDJ28CA | 5PFG                | 5BFG | 28.0                      | 31.10                             | 34.40                   | 1                   | 45.4                                      | 110.0               | 2                               |
| 5.0SMDJ30A  | 5.0SMDJ30CA | 5PFK                | 5BFK | 30.0                      | 33.30                             | 36.80                   | 1                   | 48.4                                      | 103.0               | 2                               |
| 5.0SMDJ33A  | 5.0SMDJ33CA | 5PFM                | 5BFM | 33.0                      | 36.7                              | 40.6                    | 1                   | 53.3                                      | 93.9                | 2                               |
| 5.0SMDJ36A  | 5.0SMDJ36CA | 5PFP                | 5BFP | 36.0                      | 40.0                              | 44.2                    | 1                   | 58.1                                      | 86.1                | 2                               |
| 5.0SMDJ40A  | 5.0SMDJ40CA | 5PFR                | 5BFR | 40.0                      | 44.4                              | 49.1                    | 1                   | 64.5                                      | 77.6                | 2                               |
| 5.0SMDJ43A  | 5.0SMDJ43CA | 5PFT                | 5BFT | 43.0                      | 47.8                              | 52.8                    | 1                   | 69.4                                      | 72.1                | 2                               |
| 5.0SMDJ45A  | 5.0SMDJ45CA | 5PFV                | 5BFV | 45.0                      | 50.0                              | 55.3                    | 1                   | 72.7                                      | 68.8                | 2                               |
| 5.0SMDJ48A  | 5.0SMDJ48CA | 5PFX                | 5BFX | 48.0                      | 53.3                              | 58.9                    | 1                   | 77.4                                      | 64.7                | 2                               |
| 5.0SMDJ51A  | 5.0SMDJ51CA | 5PFZ                | 5BFZ | 51.0                      | 56.7                              | 62.7                    | 1                   | 82.4                                      | 60.7                | 2                               |
| 5.0SMDJ54A  | 5.0SMDJ54CA | 5PGE                | 5BGE | 54.0                      | 60.0                              | 66.3                    | 1                   | 87.1                                      | 57.5                | 2                               |
| 5.0SMDJ58A  | 5.0SMDJ58CA | 5PGG                | 5BGG | 58.0                      | 64.4                              | 71.2                    | 1                   | 93.6                                      | 53.5                | 2                               |
| 5.0SMDJ60A  | 5.0SMDJ60CA | 5PGK                | 5BGK | 60.0                      | 66.7                              | 73.7                    | 1                   | 96.8                                      | 51.7                | 2                               |
| 5.0SMDJ64A  | 5.0SMDJ64CA | 5PGM                | 5BGM | 64.0                      | 71.1                              | 78.6                    | 1                   | 103.0                                     | 48.6                | 2                               |

## Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ )

| Part Number |              | Device Marking Code |      | Reverse Stand-Off Voltage | Breakdown Voltage @ $I_T$ |                  | Test Current | Maximum Clamping Voltage @ $I_{PP}$ | Peak Pulse Current | Reverse Leakage @ $V_R$ |
|-------------|--------------|---------------------|------|---------------------------|---------------------------|------------------|--------------|-------------------------------------|--------------------|-------------------------|
| Uni.        | Bi.          | Uni.                | Bi.  | $V_R(V)$                  | $V_{B\ Min.}(V)$          | $V_{B\ Max.}(V)$ | $I_T(mA)$    | $V_C(V)$                            | $I_{PP}(A)$        | $I_R(\mu A)$            |
| 5.0SMDJ70A  | 5.0SMDJ70CA  | 5PGP                | 5BGP | 70.0                      | 77.8                      | 86.0             | 1            | 113.0                               | 44.3               | 2                       |
| 5.0SMDJ75A  | 5.0SMDJ75CA  | 5PGR                | 5BGR | 75.0                      | 83.3                      | 92.1             | 1            | 121.0                               | 41.4               | 2                       |
| 5.0SMDJ78A  | 5.0SMDJ78CA  | 5PGT                | 5BGT | 78.0                      | 86.7                      | 95.8             | 1            | 126.0                               | 39.7               | 2                       |
| 5.0SMDJ85A  | 5.0SMDJ85CA  | 5PGV                | 5BGV | 85.0                      | 94.4                      | 104.0            | 1            | 137.0                               | 36.5               | 2                       |
| 5.0SMDJ90A  | 5.0SMDJ90CA  | 5PGX                | 5BGX | 90.0                      | 100.0                     | 111.0            | 1            | 146.0                               | 34.3               | 2                       |
| 5.0SMDJ100A | 5.0SMDJ100CA | 5PGZ                | 5BGZ | 100.0                     | 111.0                     | 123.0            | 1            | 162.0                               | 30.9               | 2                       |
| 5.0SMDJ110A | 5.0SMDJ110CA | 5PHE                | 5BHE | 110.0                     | 122.0                     | 135.0            | 1            | 177.0                               | 28.3               | 2                       |
| 5.0SMDJ120A | 5.0SMDJ120CA | 5PHG                | 5BHG | 120.0                     | 133.0                     | 147.0            | 1            | 193.0                               | 26.0               | 2                       |
| 5.0SMDJ130A | 5.0SMDJ130CA | 5PHK                | 5BHK | 130.0                     | 144.0                     | 159.0            | 1            | 209.0                               | 24.0               | 2                       |
| 5.0SMDJ150A | 5.0SMDJ150CA | 5PHM                | 5BHM | 150.0                     | 167.0                     | 185.0            | 1            | 243.0                               | 20.6               | 2                       |
| 5.0SMDJ160A | 5.0SMDJ160CA | 5PHP                | 5BHP | 160.0                     | 178.0                     | 197.0            | 1            | 259.0                               | 19.3               | 2                       |
| 5.0SMDJ170A | 5.0SMDJ170CA | 5PHR                | 5BHR | 170.0                     | 189.0                     | 209.0            | 1            | 275.0                               | 18.2               | 2                       |

## Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ )

Figure 1. Peak Pulse Power Rating Curve

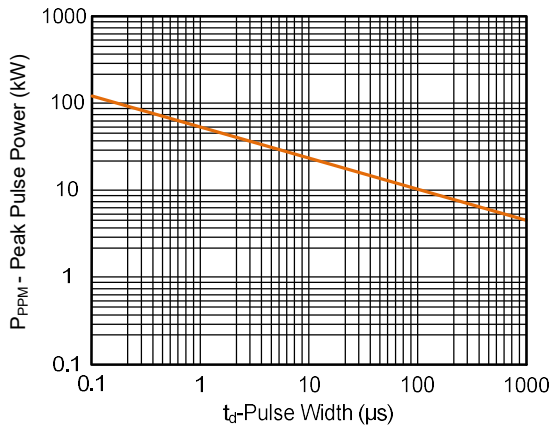


Figure 2. Pulse Derating Curve

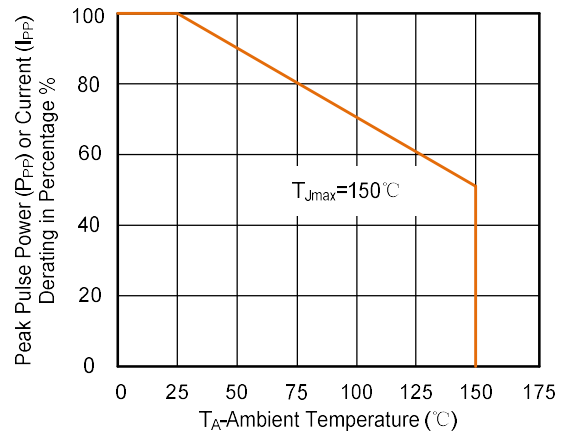


Figure 3. Pulse Waveform

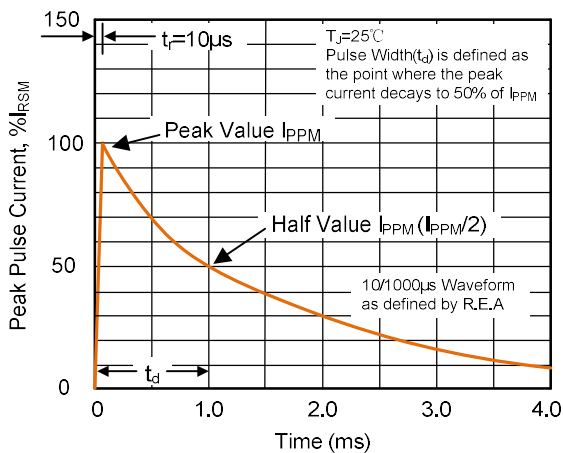


Figure 4. Typical Junction Capacitance

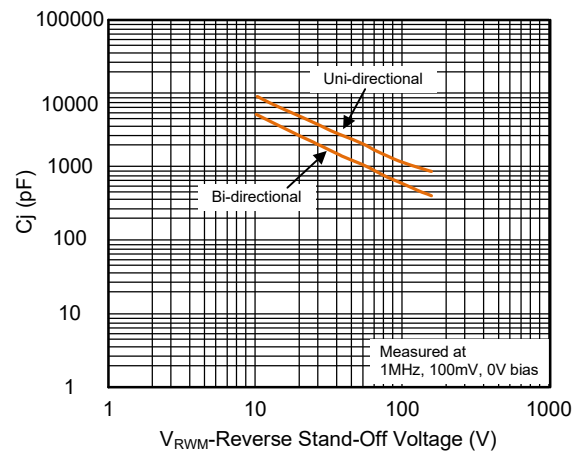


Figure 5. Steady State Power Dissipation Derating Curve



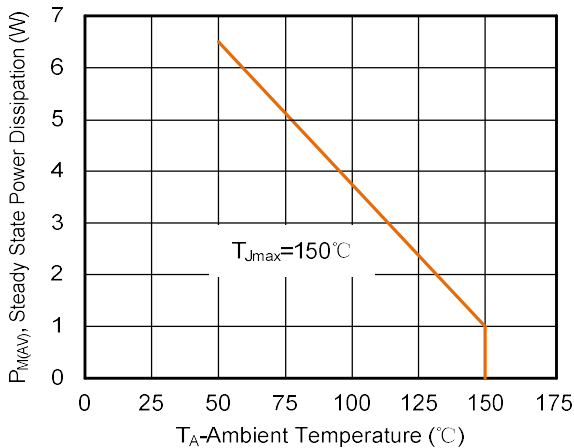


Figure 6. Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

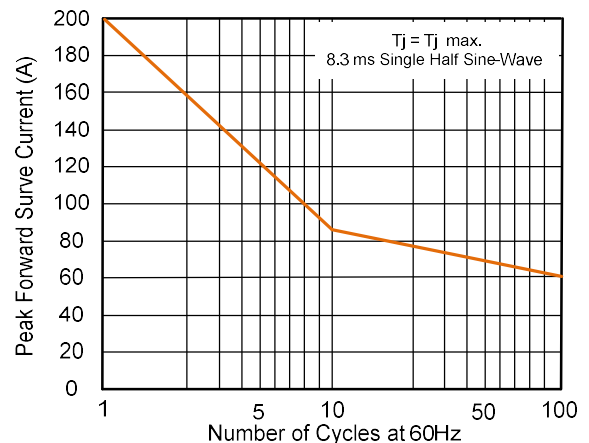


## Soldering Parameters

### Reflow Soldering

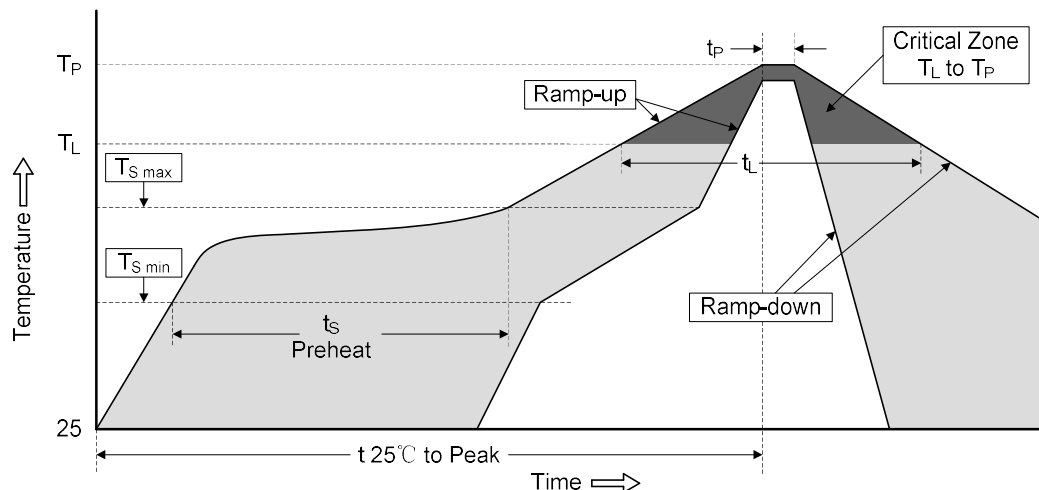

| Profile Feature                                                                                                                                                                                         | Pb-Free Assembly                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Average ramp-up rate ( $T_L$ to $T_P$ )                                                                                                                                                                 | 3°C/second max.                  |
| Preheat <ul style="list-style-type: none"> <li>-Temperature Min (<math>T_{S\ min}</math>)</li> <li>-Temperature Max (<math>T_{S\ max}</math>)</li> <li>-Time (min to max) (<math>t_s</math>)</li> </ul> | 150°C<br>200°C<br>60-180 seconds |
| $T_{S\ max}$ to $T_L$ <ul style="list-style-type: none"> <li>-Ramp-up Rate</li> </ul>                                                                                                                   | 3°C/second max.                  |
| Time maintained above: <ul style="list-style-type: none"> <li>-Temperature (<math>T_L</math>)</li> <li>-Time (<math>t_L</math>)</li> </ul>                                                              | 217°C<br>60-150 seconds          |
| Peak Temperature ( $T_P$ )                                                                                                                                                                              | 260°C                            |
| Time within 5°C of actual Peak Temperature ( $t_p$ )                                                                                                                                                    | 20-40 seconds                    |
| Ramp-down Rate                                                                                                                                                                                          | 6°C/second max.                  |
| Time 25°C to Peak Temperature                                                                                                                                                                           | 8 minutes max.                   |

## Part Number Code and Marking Code

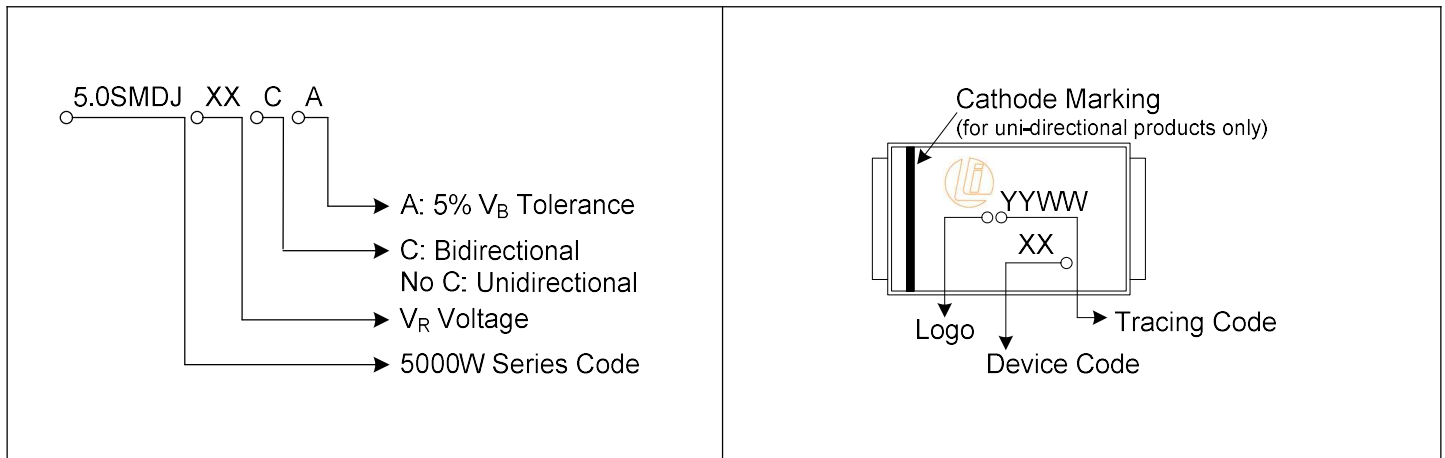

## Dimensions (SMC/DO-214AB)


The diagram shows the dimensions for the SMC/DO-214AB TVS diodes. The dimensions are labeled as follows:

- A: Cathode Band (for uni-directional products only)
- B: Width
- C: Height
- D: Thickness
- E: Lead Length
- F: Lead Width
- G: Total Length
- H: Lead Spacing
- I: Pad Width
- J: Pad Length
- K: Pad Spacing


| Symbol | Millimeters |       | Inches |       |
|--------|-------------|-------|--------|-------|
|        | Min.        | Max.  | Min.   | Max.  |
| A      | 2.900       | 3.200 | 0.114  | 0.126 |
| B      | 6.600       | 7.110 | 0.260  | 0.280 |
| C      | 5.590       | 6.220 | 0.220  | 0.245 |
| D      | 2.060       | 2.620 | 0.079  | 0.103 |
| E      | 0.760       | 1.520 | 0.030  | 0.060 |
| F      | -           | 0.203 | -      | 0.008 |
| G      | 7.750       | 8.130 | 0.305  | 0.320 |
| H      | 0.152       | 0.305 | 0.006  | 0.012 |
| I      | 3.300       | -     | 0.129  | -     |
| J      | 2.400       | -     | 0.094  | -     |
| K      | -           | 4.200 | -      | 0.165 |

## Packaging Specification


### Tape

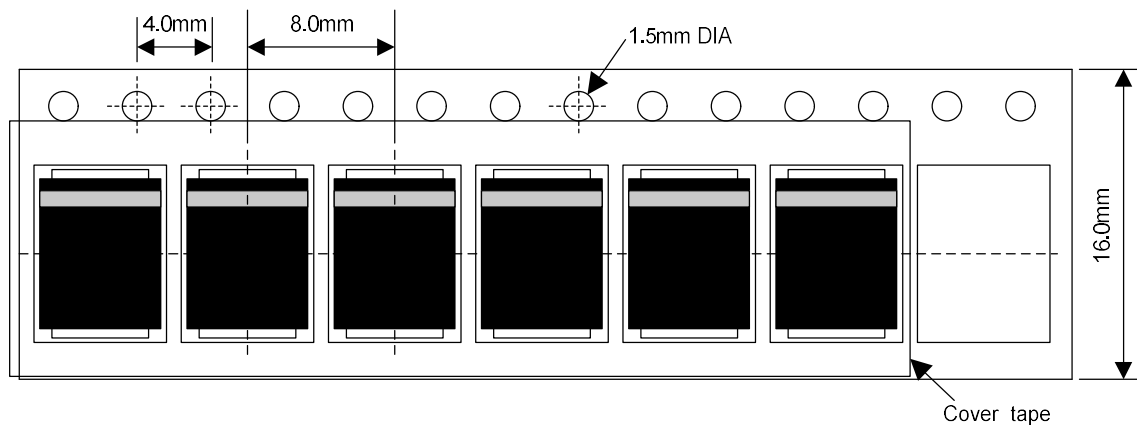

### For Uni-Devices

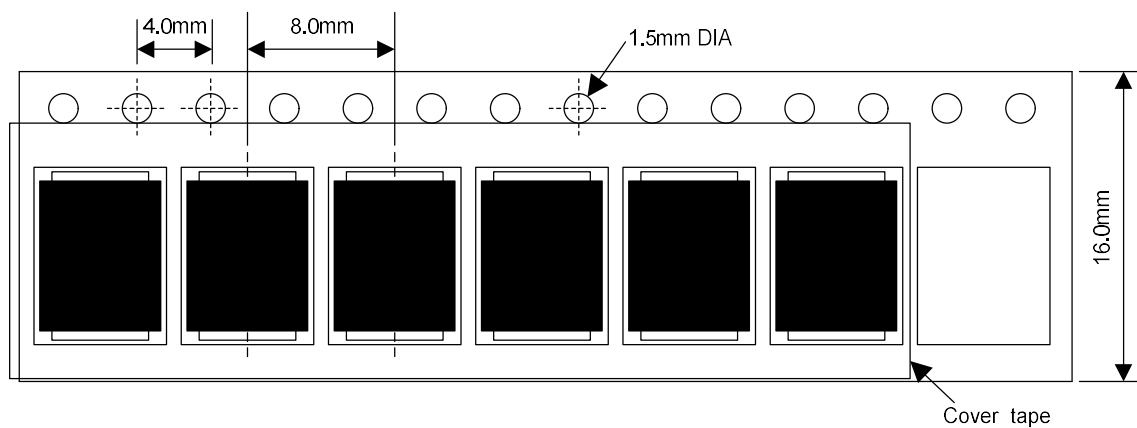

### 13 Inches Reel

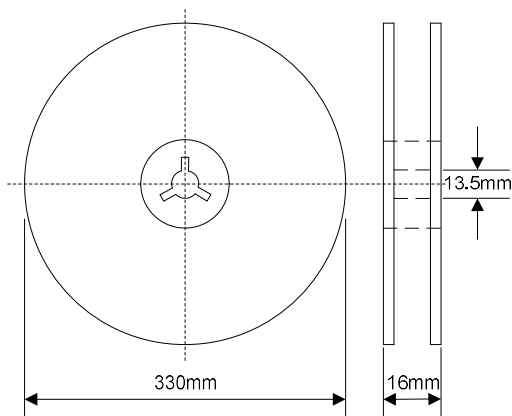

**Quantity:** 3000pcs/reel