

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5



6

7



8

9

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BATCH PRODUCTION INITIAL RELEASE.	2013.11.26	邱明周
02	△	依業務要求增加CAP與膠紙配方	2017.09.01	馮國東

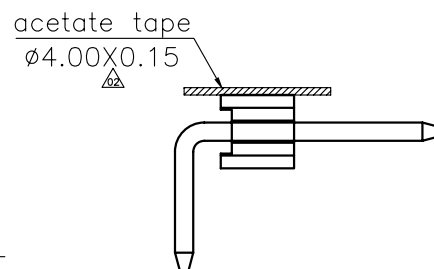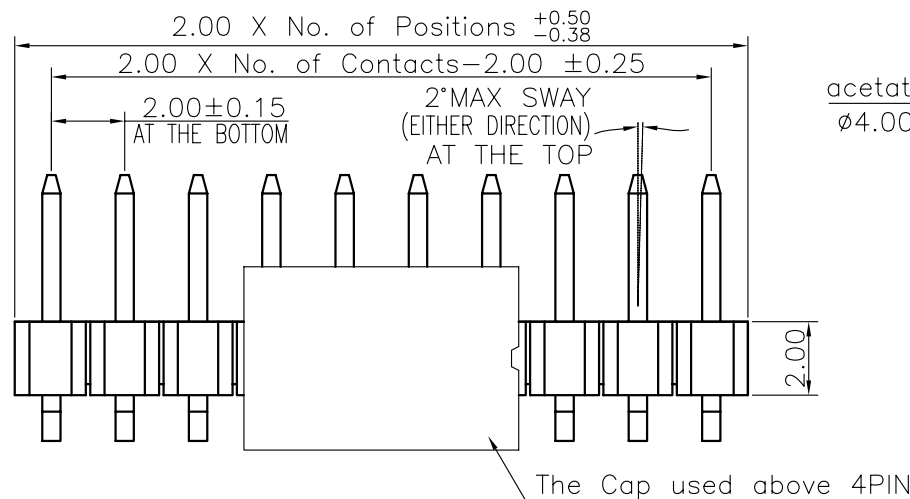


Specifications
Current Rating: 2.0Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding Voltage: 500VAC
Contact Resistance: 20mΩ Max.
Operating Temperature: -40°C to +105°C
Materials
Contact Material: Brass
Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T (Halogen Free) or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

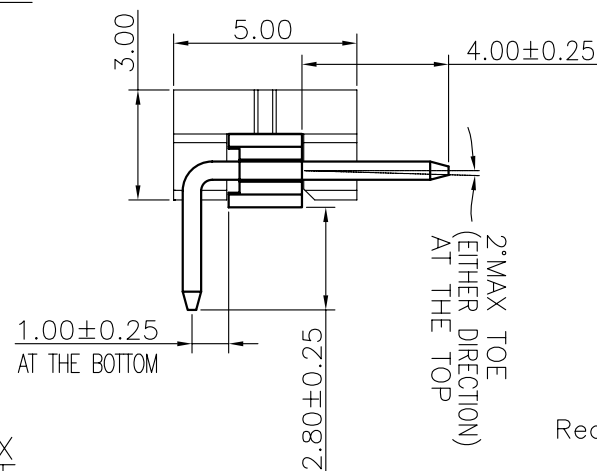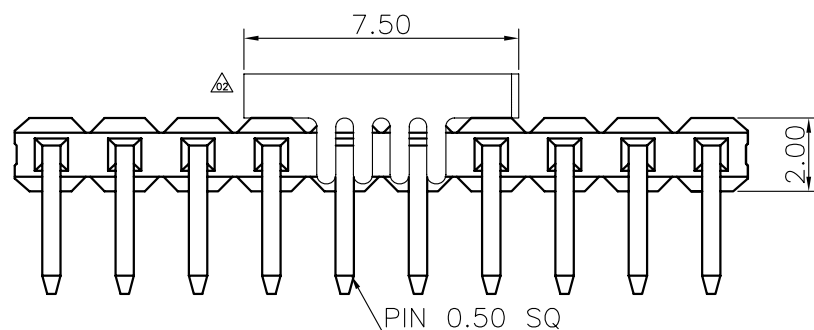

Ordering Information

G	PFB101	-	XX	XX	A	001	R	1	B	X
No. of Pins per Row	01~40	Standard Plating	02=Gold Flash	Selective Plating	01=Tin	05=Gold Flash/Tin	Color	1=Black	Standard Packing	A=Box
									Selective Packing	C=Tube
										E=CAP+Tube
										F=CAP+Tape&Reel
										G=Acetate tape+Tube
										H=Acetate tape+T&R

Recommended P.C.Board Layout
(Tolerance: ±0.05)



格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX±0.15
.XXX.*±1.0°	.XXX±0.10

DESIGNED: 馮國東	DATE: 2017.09.01
CHECKED: 曹 熙	DATE: 2017.09.01
CO SIGNED: 劉北平	DATE: 2017.09.01
APPROVED: 李 輝	DATE: 2017.09.01

DWG. NO.	GPFB101-CA1RB
PART NO.	GPFB101-XXXX A001R1BX

TITLE.
2.00 PIN HEADER
SINGLE ROW R/A TYPE
CONNECTOR

1

2

3

4

5

6

7

8

9