




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2013.05.04	李芳忠

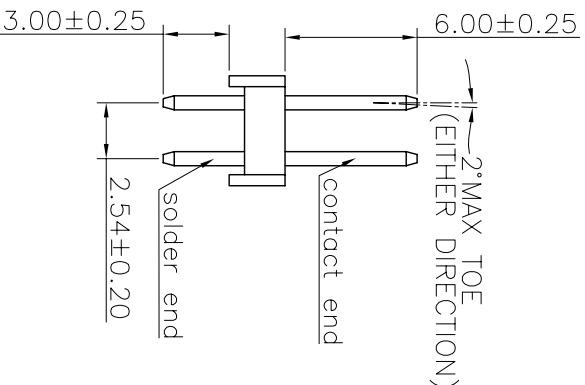

2.54 X No. of Positions $+0.50$
 -0.38

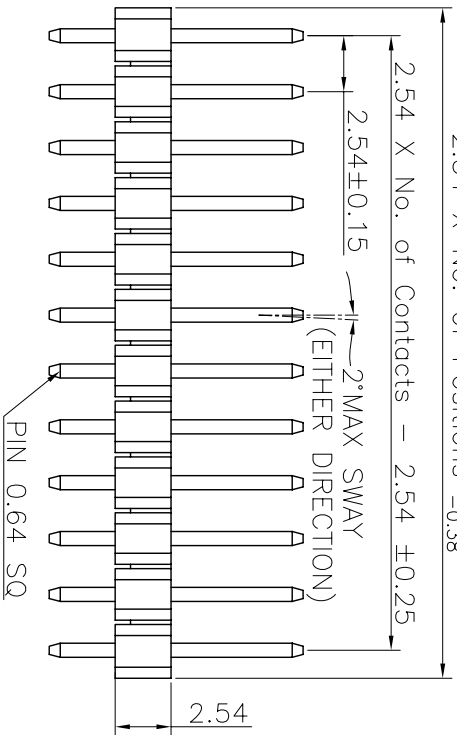

Specifications
Current Rating:3Amp
Insulation Resistance:1000MΩmin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 Nylon 6T(Halogen Free) or the equivalent material
All materials must meet Greencoan requirement for environment protection.

Ordering Information

G PHA201 - XX XX A 001 R 1 A X


No. of Pins per Row
01~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black

Standard Packing
A=Box
Selective Packing
C=Tube

Recommended P.C.Board
Layout

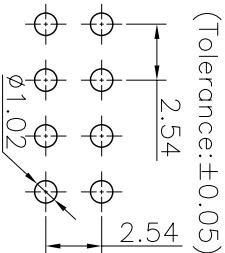

格 菱 股 份 有 限 公 司 <i>Greencom Corporation</i>				GENERAL TOLERANCE		DESIGN: 李芳忠	DATE: 2013.05.04	DWG. NO.	TITLE.
				X.±5.0°		CHECKED: 劉北平	DATE: 2013.05.04	PART NO. GPHA201-XXXX A001R1AX	2.54 PIN HEADER DUAL ROWS DIP TYPE CONNECTOR
				.X.±3.0°		AUDITED:	DATE:		
				.XX±2.0°		APPROVED:	DATE:		
REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1	.XXX±1.0°					