REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2009.06.12	車 澈
02	02	變更圖號	2011.05.20	曹 熙
03	03	依業務求增加CAP配方	2011.12.05	李芳忠

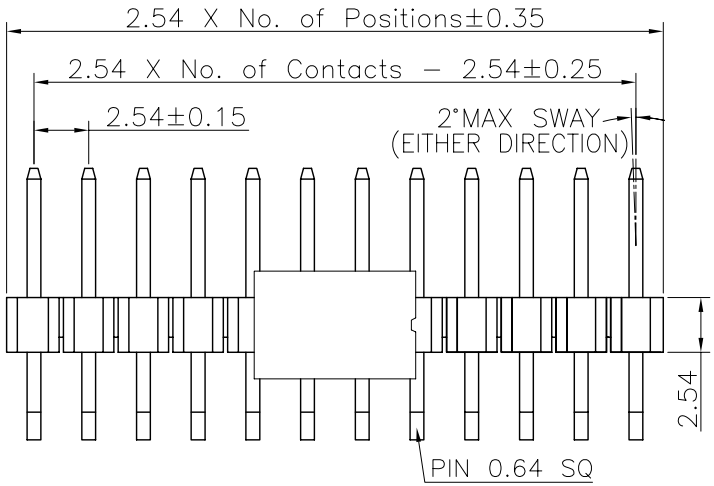

Specifications
Current Rating:3Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Brass
Insulator Material:High Temperature Thermoplastic, UL 94V−0 Nylon6T(無鹵) or the equivalent material
All materials must meet Greenconn requirement for environment protection.

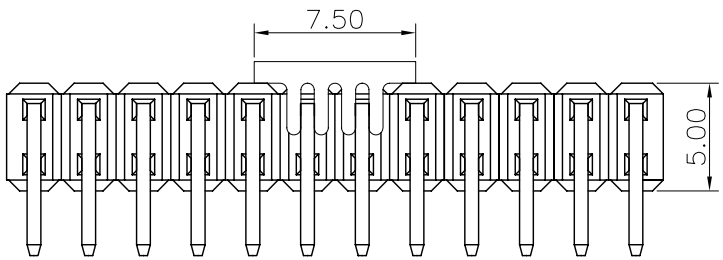

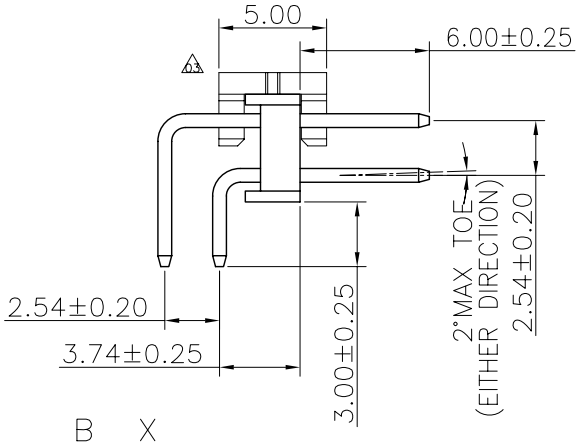

Recommended P.C.Board Layout
(Tolerance:±0.05)



Ordering Information

G PHB201 − XX XX A 001 R 1 B X

- XX: No. of Pins per Row 02~40
- XX: Standard Plating 02=Gold Flash; Selective Plating 01=Tin, 05=Gold Flash/Tin
- 1: Color 1=Black
- X: Standard Packing A=Box; Selective Packing C=Tube, E=Cap+Tube, F=Cap+Tape&Reel

格 稜 股 份 有 限 公 司
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.
03	mm	3:1	1/1

GENERAL TOLERANCE	
X.°±5.0°	X.±0.30
.X°±3.0°	.X±0.25
.XX°±2.0°	.XX±0.15
.XXX°±1.0°	.XXX±0.10

DESIGN:	李芳忠	DATE: 2011.12.05
CHECKED:	劉北平	DATE: 2011.12.05
AUDITED:	李 輝	DATE: 2011.12.05
APPROVED:	cc_li	DATE: 2011.12.05

DWG. NO. 02 GPHB201−CA1RB

PART NO. GPHB201−XXXX A001R1BX

TITLE. 2.54 PIN HEADER DUAL ROWS R/A TYPE BASE 2.54H