
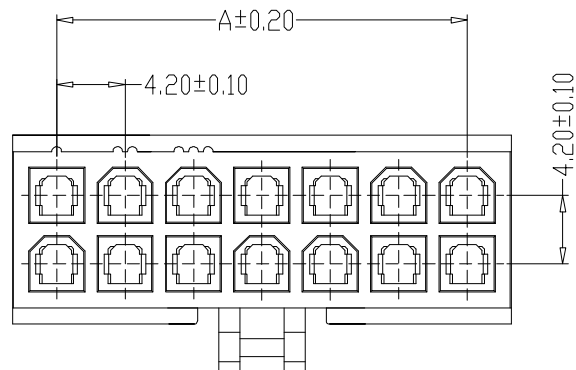
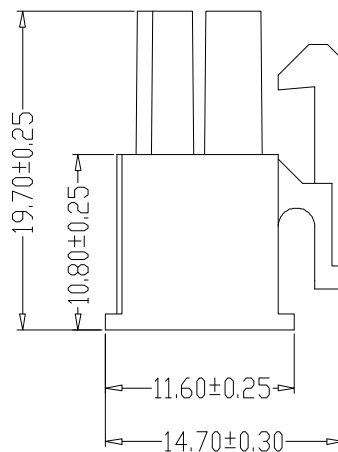
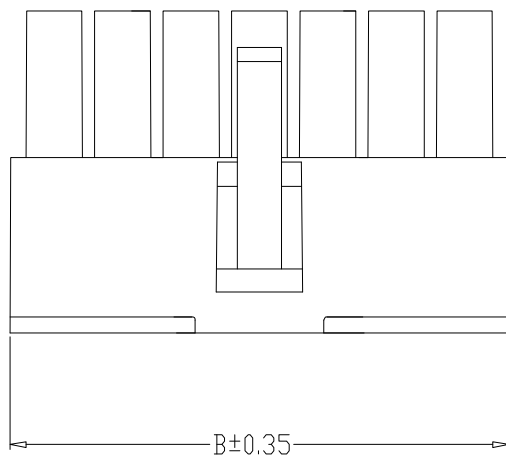



2X2P



2X1P

SPECIFICATIONS

- 1、Current Rating: 9A AC, DC
- 2、Voltage Rating: 600V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Nylon66,UL94V-0

编 号	尺寸 (mm)	
	A	B
HC-5557-2*1Y	---	5.40
HC-5557-2*2Y	4.20	9.60
HC-5557-2*3Y	8.40	13.80
HC-5557-2*4Y	12.60	18.00
HC-5557-2*5Y	16.80	22.20
HC-5557-2*6Y	21.00	26.40
HC-5557-2*7Y	25.20	30.60
HC-5557-2*8Y	29.40	34.80
HC-5557-2*9Y	33.60	39.00
HC-5557-2*10Y	37.80	43.20
HC-5557-2*11Y	42.00	47.40
HC-5557-2*12Y	46.20	51.60

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE		制 图 DRAWING	钱岳生 2013、07、01			料 号 PART NO.	HC-5557-2*NY		版 本 REV.	A
			X.±0.25	X.±2°	审 核	张 名			品 名 TITLE	5557双排孔座		页 次 SHEET	1/1
			.X±0.20	.X'±1°	CHECK	2013、07、03			客户料号 CUTL NO.				
			.XX±0.15	.XX'±0.5°	核 准	张 名							
			.XXX±0.10	.XXX'±0.5°	APPROVAL	2013、07、05							
					单 位 UNITS	MM	比 例 SCALE	1:1	深圳市华灿天禄电子有限公司				