






注：整条总长+0.8

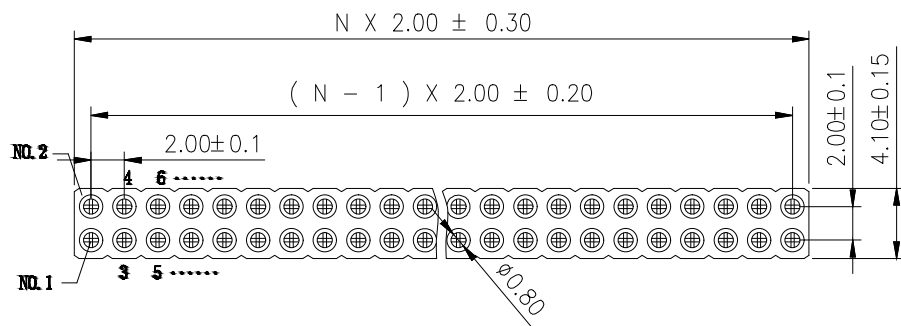

注：整条总长+0.5

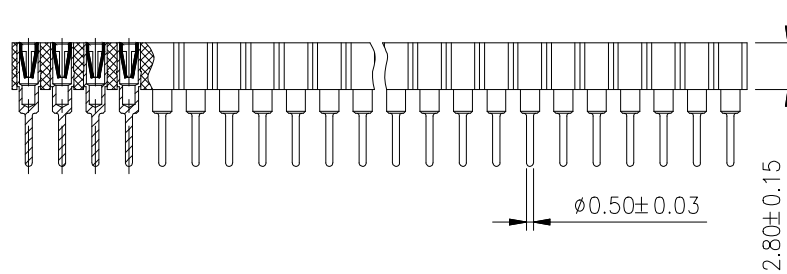

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

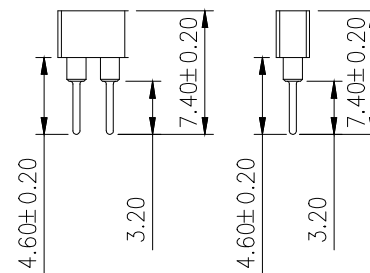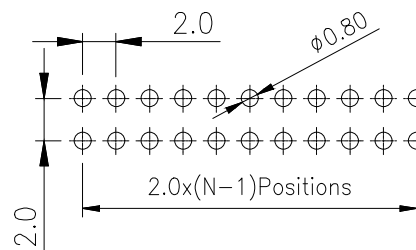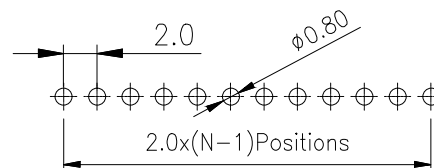

SPECIFICATIONS

Current Rating:3.0AMP

Contact Resistance:10mΩ Max

Dielectric Strength:Min 1000V RMS

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Clip(4/6 finger):Becu(C17200)

Accepted Pin:0.40 to 0.60mm

Insulator Material:Polyester(UL94V-0)

Standard: PPS

Soldering temperature: 260°C±5° 5S

Ordering Information

PM 200 - * - N - Z - C

No.of Rows
1=Single Row
2=Dual Row

No.of Pins
2-40Pin

Length
100=10.0mm

			GENRL TOLERANCE		制图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	审核 CHECK				
			X.X	±0.30	批准 APPROVAL	产品名称 TITLE	2.0x2.8mm 圆针排母 L=7.4	版本 REV.	A
1	初版发行		X.XX	±0.20	比例 SCALE	产品料号 PART NO.	PM200-1-N-Z-3.0-C	单位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X.XXX	±0.10	投影 Projection	材料 MATERIAL		页次 SHEET	1/1
			Angle	±3.0°					