


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

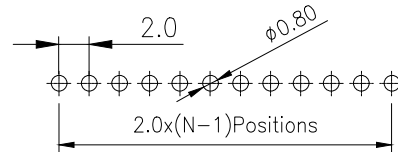

SPECIFICATIONS

Current Rating:3.0AMP

Contact Resistance:10mΩ Max

Dielectric Strength:Min 1000V RMS

Operation Temperature:-40°C to +105°C

Contact Material:Brass



Contact Clip(4/6 finger):Becu(C17200)

Accepted Pin:Ø0.40 to 0.60mm

Insulator Material:Polyester(UL94V-0)

Standard: PPS

Soldering temperature: 260°C±5° 5S

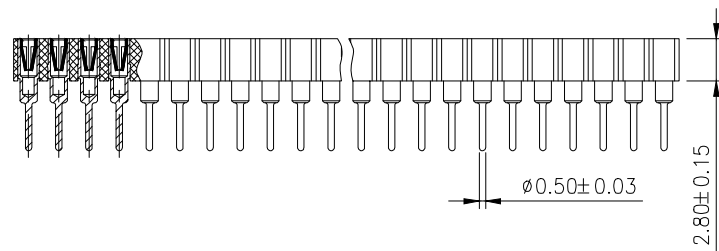

			GENE RL TOLERANCE	制 图 DRAWING		深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	2.54x3.0圆孔 单排母座 180°	版 本 REV.	A
			X.XX ±0.20	比 例 SCALE		产品料号 PART NO.	PM254-1-N-Z-3.0-C	单 位 UNITS	mm
1	初版发行		X.XXX ±0.10	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°						