
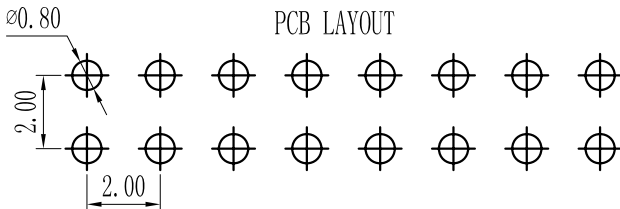
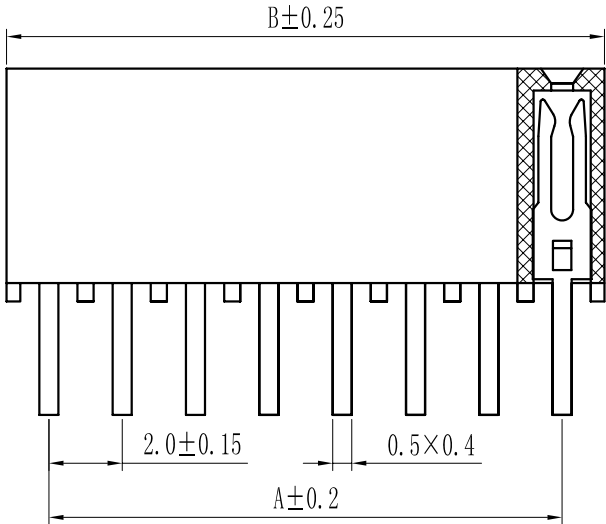


Pin数	尺寸A	尺寸B
2×3	4.0	6.0
2×4	6.0	8.0
2×5	8.0	10.0
2×6	10.0	12.0
2×7	12.0	14.0
2×8	14.0	16.0
2×9	16.0	18.0
2×10	18.0	20.0
2×11	20.0	22.0
2×12	22.0	24.0
2×13	24.0	26.0
2×14	26.0	28.0
2×15	28.0	30.0
2×16	30.0	32.0
2×17	32.0	34.0
2×18	34.0	36.0
2×19	36.0	38.0
2×20	38.0	40.0
2×21	40.0	42.0
2×22	42.0	44.0
2×23	44.0	46.0
2×24	46.0	48.0
2×25	48.0	50.0
2×26	50.0	52.0
2×27	52.0	54.0
2×28	54.0	56.0
2×29	56.0	58.0
2×30	58.0	60.0
2×31	60.0	62.0
2×32	62.0	64.0
2×33	64.0	66.0
2×34	66.0	68.0
2×35	68.0	70.0
2×36	70.0	72.0
2×37	72.0	74.0
2×38	74.0	76.0
2×39	76.0	78.0
2×40	78.0	80.0

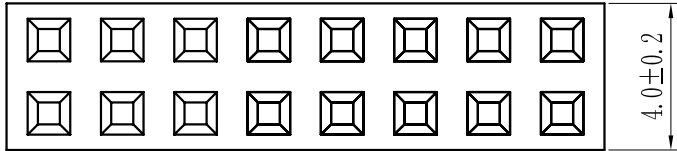

LTR	DESCRIPTION	DATE	CHANGE	APPL'
△				
△				
△				

符合ROHS标准

SPECIFICATIONS

Current Rating : 1.5AMP
Operating Temperature : -40℃to+105℃
Contact Resistance : 20mΩ Max
Insulation Resistance : 1000MΩ Min
Withstand Voltage : AC 5000V
Insulating Material : Polyester (UL94V-0)
Standard : PBT
Contact Material : Brass
Contact Plating : Au or Sn Over 50u" Ni

For and on behalf of
XKB INDUSTRIAL PRECISION CO., LIMITED
香港星坤工業精密有限公司

XKB INDUSTRIAL PRECISION CO., LIMITED				
SIGNATURES	DATE	PRODUCT: 2.00间距 Female Header connectors		
DEN		DWG NO: X4621FV-2xXX-C64D24-4429	SCALE:	
CHK		#: MAJOR DIMENSION	ALL DIMENSIONS ARE IN MM Taper	
APL		#: ORDER DIMENSION	TOLERANCES CLASS:	
		&c: C.P.K		SHEET: 01