
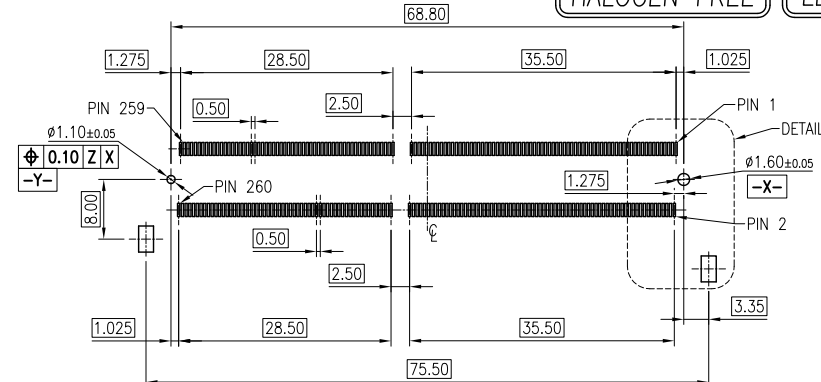
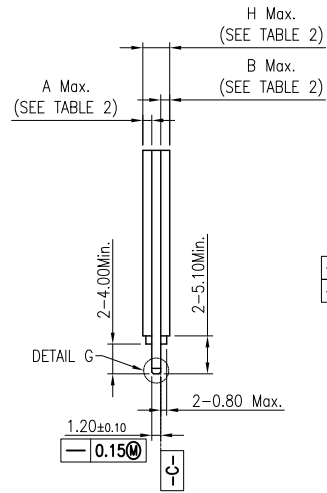


A
B
C
D
E
F






1 2 3 4 5 6 7 8

REV.	MODIFICATION	DATE	DRAW
A	INITIAL RELEASE	2015.05.12	Ann
B	ECN-2015029	2015.07.31	Ann
C	ECN-2016003	2016.05.31	Vincent

HALOGEN FREE LEAD FREE

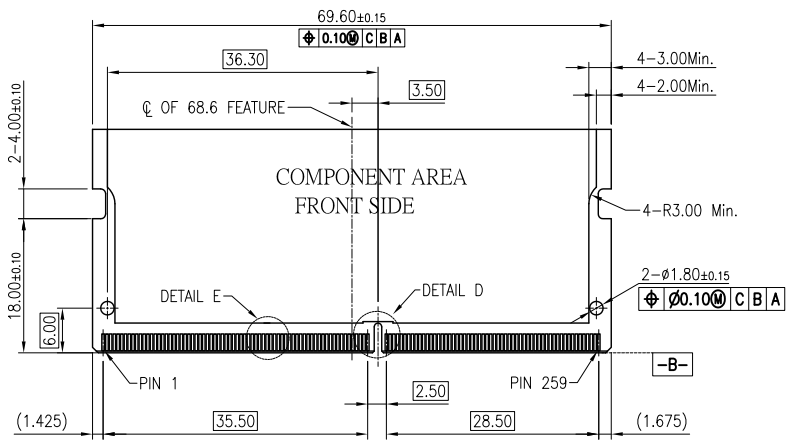

RECOMMEND P.C BOARD LAYOUT
PCB THICKNESS 0.80mm Min.
PCB LAYOUT GENERIC TOLERANCE:±0.05
(-Z-:PCB SURFACE)

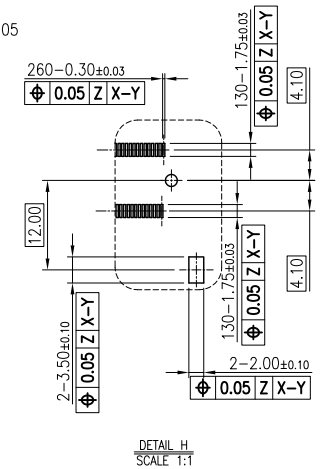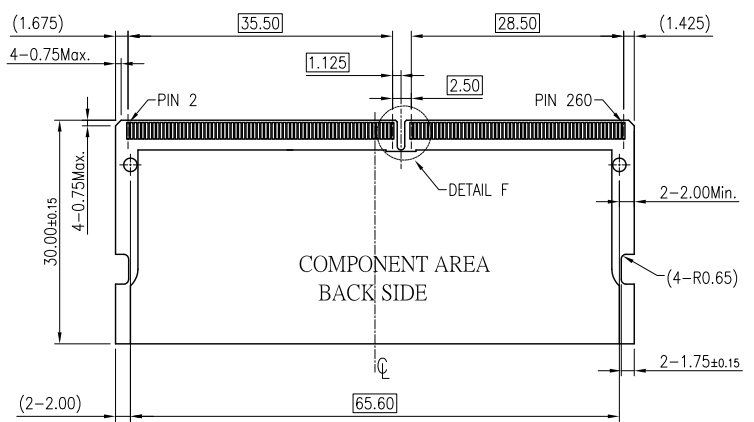

RECOMMEND MODULE CONFIGURATION

DIM. H	DIM. A	DIM. B	DIM. C	DIM. D
4.70	1.70	1.70	10.50	4.90
3.70	1.20	1.20	10.00	5.40

DIMENSION IN mm [Inch]		PROD. SPEC. SP-D4XXXL1	深圳市逸沛兴电子科技有限公司		
TOLERANCE UNLESS OTHERWISE SPECIFIED		PKG. SPEC. PK-D4XXX-XXX			
.X±0.35	X*± 1°	APR. Tony 2016.05.31	TITLE: DDR4 9.2H STD CONNECTOR		
.XX±0.25	.X*±	CHK. Leon 2016.05.31	FILE NO. ARG-224	DWG NO. D4ASX-260XX-XX92	
.XXX±	.XX*±	DRA. Vincent 2016.05.31	PROJ.	CUSTOMER DRAWING	
			SIZE A4	SCALE 1:1	SHEET 2/2
				REV. C	C

1 2 3 4 5 6 7 8