

NR6028 Series

FEATURES

- Magnetically shielded structure that ensures the high-density mounting configurations.
- Closed magnetic circuit design reduces leakage 4. Small and low profile inductor.tal material for large current and low loss.
- Provided in embossed carrier tape packaging for use with automatic mounting machines.
- 30% higher current rating than conventional inductors of equal size.

APPLICATIONS




- Smart phone.
- Smart TV
- LED lighting
- Flat-screen TVs, blue-ray disc recorders,set top boxes.
- Notebooks, desktop computers, servers,graphic cards.

PRODUCT IDENTIFICATION

NR	6028	1R0	M
1	2	3	4


1. Series Name : Wire Wound SMD Power Inductor
2. Size Code : Dimensions (unit:mm)
3. Nominal Inductance Value : R33=0.33μH, 1R0=1.0μH, 100=10μH
4. Inductance Tolerance : N=±30%, M=±20%, K=±10%

DIMENSIONS



Using Ink for marking

Series	A	B	C(MAX)	D	E	F
NR6028	6.00±0.20	6.00±0.20	3.00	5.00	1.85	2.30




APPLICATIONS

Part NO.	Inductance L0 (μH)	Test Condition	Tolerance (%)	DCR (mΩ) Max.	DCR (mΩ) Typ.	Isat (A) ΔL/L0≤30%	Irms (A) ΔT≤40°C
▪ NR6028 Series							
NR6028-1R0N	1.00	100kHz/0.25V	±30	20.0	15.0	8.00	5.50
NR6028-1R5N	1.50	100kHz/0.25V	±30	25.0	18.0	7.00	5.20
NR6028-2R2M	2.20	100kHz/0.25V	±20	28.0	21.0	6.00	4.50
NR6028-3R3M	3.30	100kHz/0.25V	±20	40.0	32.0	4.50	3.50
NR6028-4R7M	4.70	100kHz/0.25V	±20	45.0	40.0	4.00	3.00
NR6028-5R6M	5.60	100kHz/0.25V	±20	60.0	50.0	3.50	2.50
NR6028-6R8M	6.80	100kHz/0.25V	±20	65.0	55.0	3.20	2.40
NR6028-100M	10.0	100kHz/0.25V	±20	85.0	70.0	2.50	2.00
NR6028-120M	12.0	100kHz/0.25V	±20	96.0	80.0	2.40	1.90
NR6028-150M	15.0	100kHz/0.25V	±20	125.0	100.0	2.30	1.80
NR6028-220M	22.0	100kHz/0.25V	±20	185.0	150.0	1.90	1.40
NR6028-270M	27.0	100kHz/0.25V	±20	210.0	185.0	1.60	1.30
NR6028-330M	33.0	100kHz/0.25V	±20	260.0	200.0	1.40	1.20
NR6028-470M	47.0	100kHz/0.25V	±20	410.0	350.0	1.30	1.00
NR6028-560M	56.0	100kHz/0.25V	±20	420.0	360.0	1.10	0.90
NR6028-680M	68.0	100kHz/0.25V	±20	500.0	400.0	1.00	0.85
NR6028-820M	82.0	100kHz/0.25V	±20	680.0	550.0	0.90	0.80
NR6028-101M	100	100kHz/0.25V	±20	750.0	620.0	0.85	0.75
NR6028-151M	150	100kHz/0.25V	±20	860.0	800.0	0.65	0.60
NR6028-221M	220	100kHz/0.25V	±20	1600	1300	0.55	0.50
NR6028-331M	330	100kHz/0.25V	±20	2400	1850	0.50	0.45
NR6028-471M	470	100kHz/0.25V	±20	3200	2400	0.35	0.32
NR6028-681M	680	100kHz/0.25V	±20	5500	4300	0.32	0.30
NR6028-821M	820	100kHz/0.25V	±20	5800	4500	0.26	0.25
NR6028-102M	1000	100kHz/0.25V	±20	7800	5950	0.23	0.22

Notes

1. All test data is referenced to 25 °C ambient .
2. Isat: DC current (A) that will cause L0 to drop approximately 30% TYP .
3. Irms: DC current (A) that will cause an temperature rise ΔT approximate to 40°C .
- 4 Operating temperature range - 40 °C to + 125 °C(Including self - temperature rise) .
5. Storage temperature and humidity range (product with tapping):-10°C~+40°C,RH70% Max

RELIABILITY TEST

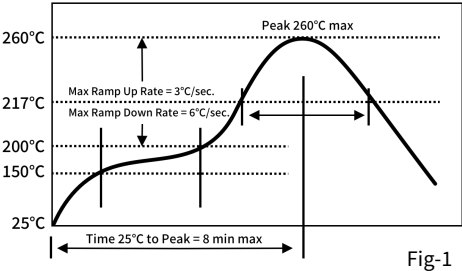TEST ITEM	REQUIREMENTS	TEST METHODS AND REMARKS
Resistance to Soldering Heat	- No visible mechanical damage - Inductance change: Within $\pm 5\%$	- Solder on PCB to Reflow test Peak Temp. $260 \pm 5^\circ\text{C}$ 5 ~ 10 secs ,Cycles :2 times..Re-flowing Profile: Please refer to Fig-1 - Test board thickness: 1.5mm - Test board material: glass epoxy resin - The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.product showed no damage under microscope.(for microscope of Shun Yu SZM-45 20X)  Fig-1
High Temperature	- No visible mechanical damage - Inductance change: Within $\pm 10\%$	- Temperature: $125 \pm 2^\circ\text{C}$ - Duration: 1000 hours - The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.
Steady damp-heat	- No visible mechanical damage - Inductance change: Within $\pm 10\%$	- Temperature: 85°C - Humidity: 85% RH - Duration: 1000 hours - The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.
Mechanical Vibration	- No visible mechanical damage - Inductance change: Within $\pm 10\%$	- Frequency: 10HZ~55HZ~10HZ/Min Cycles - Amplitude: 1.5 mm - Directions: X,Y,Z - Time: 2 hours in each directions (total of 6 hours)

RELIABILITY TEST


TEST ITEM	REQUIREMENTS	TEST METHODS AND REMARKS
Thermal Shock	- No visible mechanical damage - Inductance change: Within $\pm 10\%$	- Temperature and time: -40°C for 30 ± 3 min → 125°C for 30 ± 3 min, please refer to Fig-2 - Transforming interval: Max. 3 Min - Tested cycle: 1000 cycles - The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made. Fig-2
Salt Spray	- No visible mechanical damage - Inductance change: Within $\pm 10\%$	- Salt concentration: $(5 \pm 1)\%$ (mass percent) - pH value: 6.5 - 7.2 - Temperature: 35 ± 2 °C - humidity: 85% - time: 24 hours - in normal temperature and humidity for 1 ~ 2 hours, testing inductance, the inductance value change can not be more than before test $\pm 10\%$.
Terminal Strength	The peak thrust is greater than 10N	- The electrode of the inductor is soldered to the PCB, to Fig-3 Then apply a force in the X direction of the arrow. 10N force. - Keep time: $10(\pm 1)$s - The first three tests were OK, and the force was applied until the peak value of the product peeling. The test speed was set in the range of 3 ~ 8mm/min. Fig-3

PACKAGING INFORMATION

REEL DIMENSION (mm)



TAPING DIMENSIONS (mm)

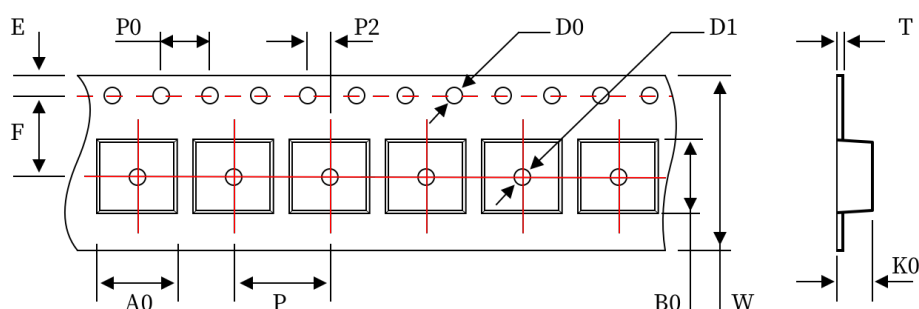

Type	Tape dimensions (mm)											
Series	W	P	P0	P2	D0	D1	T	A0	B0	K0	E	F
NR6028	16.0 ±0.3	8.0 ±0.1	4.0 ±0.1	2.0 ±0.1	1.5 ±0.1	1.5 ±0.1	0.35 ±0.05	6.45 ±0.1	6.4 ±0.1	3.15 ±0.1	1.75 ±0.1	7.5 ±0.1

PACKAGING QUANTITY (Standard)

Type	Reel	Inner Box	Carton Box
NR6028	2000 pcs / Reel	4 Reel / Box (8000 pcs)	4 Middle boxes (32,000 pcs)

PEEL FORCE OF TOP COVER TAPE

The peel speed shall be about 300mm/minute

The peel force of top cover tape shall be between 0.1 to 1.3 N

