

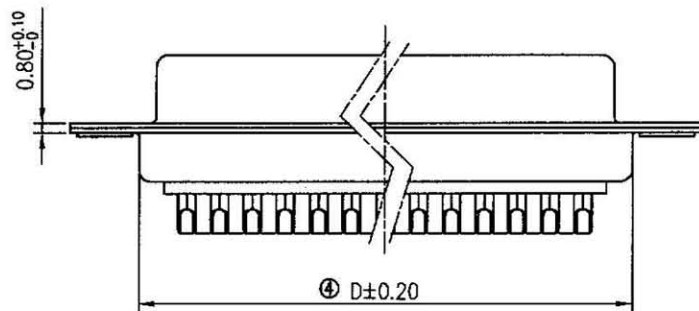


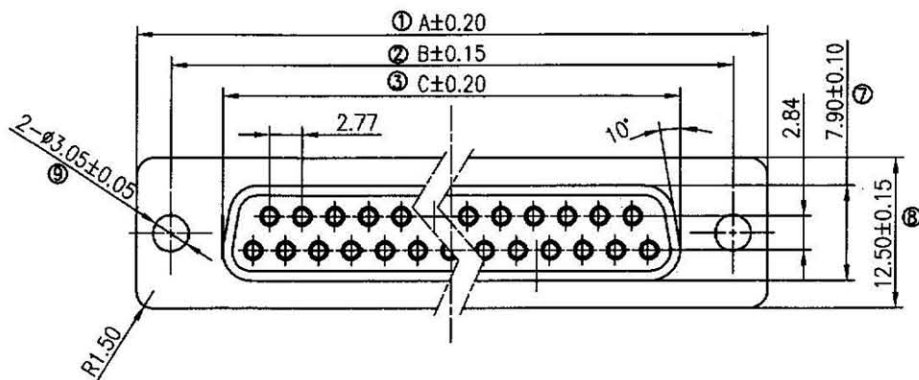


Material:

1. Insulator: PBT+30%Glass Fiber (UL94V-0)
2. Contact: Brass C2680 H65
3. Contact Plated: gold plated over Nickel
4. Shell: SPCC-SD
5. Shell Plated: Cu60u"/Ni100-120u" and Cu60u"/Sn100-120u"

SPECIFICATION:

1. Contact Current Rating: 3 AMPS
2. Insulation Resistance: 1000M Ohm MIN. AT 500V DC
3. Dielectric Withstanding Volt: AC 500V (R.M.S)/1 minute
4. Operation Temperature: -55° C ~ +105° C

铆钉型式说明

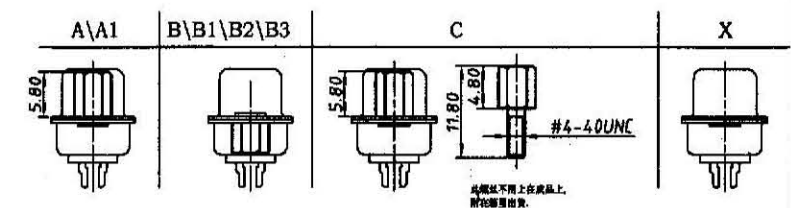

PIN DIM	9Pin	15Pin	25Pin	37Pin
A	30.80	39.20	53.05	69.40
B	25.00	33.30	47.05	63.50
C	16.92	25.25	38.95	55.40
D	19.20	27.70	41.10	57.30
E	10.80	10.70	10.70	10.70

TOLERANCE TABLE

.0	±0.20
.00	±0.10
.000	±0.05

APPROVED:	DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRY CO., LTD			
CHECKED:	DATE:	TITLE: DB-XP 母头 焊线式			
DRAWN:	DATE:	P/N			
LYF	2009-07-17	UNIT	mm	SCALE	free
		FILE NO.	Ckmtw-DB-0001	REV.	A
		SH00			