



TEL :+86(0)769-38879888 Fax :+86(0)769-38879889 E-mail : yl@dqylec.com

PRODUCT SPECIFICATION SHEET

CUSTOMER	:	
PRODUCT TYPE	:	OSC 3.2X2.5 (4PAD)
NOMINAL FREQ.	:	32.768000 KHz
FL P/N	:	3CQ3200016-Q
REVISION	:	S1
CUSTOMER P/N	:	

CUSTOMER'S APPROVAL&DATE

[illegible]

FL CORPORATION

APPROVED	CHECKED	DESIGNED
Xing Yue	Huang Ji Ning	Li Xiang

MSL1

RoHS Compliant



CONTENTS

PAGE

• SPECIFICATION REVISION RECORD SHEET	2
• ELECTRICAL SPECIFICATIONS	3
• DIMENSIONS & MARKING	4
• STRUCTURE ILLUSTRATION	5
• RELIABILITY TEST SPECIFICATIONS	6
• PACKAGING REQUIREMENT	7/8
• SPECIFICATION OF THE ENVIRONMENT-RELATED SUBSTANCES	9

ATTACHMENT (optional)

- | | | | |
|------------------------------------|---|------------------------------|--|
| • ELECTRICAL CHARACTERISTICS TEST | A | ☐ YES | ☒ NO |
| • TEMPERATURE CHARACTERISTICS TEST | B | ☐ YES | ☒ NO |



FL P/N:		3CQ3200016-Q	
VER:	S1	PAGE:	2/9

[illegible]



ELECTRICAL SPECIFICATIONS

Standard atmospheric conditions

Unless otherwise specified. The standard range of atmospheric conditions for making measurement and tests are as follow:

Ambient temperature $25\pm 2^{\circ}\text{C}$

Relative humidity 40%~70%

If there is no doubt the results, measurement shall be made within the following limits:

Ambient temperature $25\pm 2^{\circ}\text{C}$

Relative humidity 40%~70%

Measure equipment

Electrical characteristics measured by S&A 280A or equivalent.

Crystal cutting type


The crystal is using AT CUT (thickness shear mode)

ELECTRICAL SPECIFICATIONS


Parameters	Symbol	Electrical Spec.	UNITS	Notes
Nominal Frequency	FL	32.768000	KHz	-
Operating Temperature	TOPR	-40 ~ +85	$^{\circ}\text{C}$	-
The Total Frequency Offset	-	+/-25	ppm	-
Output Load	CL	15.0	p F	Max.
Supply Voltage	VDD	1.8	V	-
"0"Level	VOL	$VDD \times 0.1$	V	Max.
"1"Level	VOH	$VDD \times 0.9$	V	Min.
Enable High Voltage	ELH	$VDD \times 0.7$	V	Min.
Enable Low Voltage	ELL	$VDD \times 0.3$	V	Max.
Symmetry of Wave From	Symmetry	45~55%		-
Current Consumption	IDD	0.3	m A	Max.
Rise and Fall Time	Tr,Tf	25.0	nSec	Max.
Start time	tosc	3.0	mSec	Max.
Aging	-	+/-5	ppm	1st Year
Storage Temperature Range	-	-55 ~ +125	$^{\circ}\text{C}$	-
Output waveform	-	CMOS	-	-
ESD	-	HBM>2000V	-	JESD22-A114-B
MSL	-	Level 1	-	IPC/JEDEC J-STD-033C




DIMENSIONS

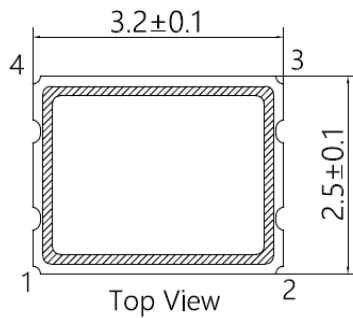


Top View



Side View



Bottom View



PAD FUNCTION

1: ENABLE CONTROL


2: GND

3: OUT

4: VDD


Enable Control

Pad 1 Input	Pad 3 Output
Level High or Open	Normal Operation
Level Low	Stopped



Top View Suggested Layout

MARKING



Frequency

Ex: Q32=32.768KHz

Lot (2 digits)

Year Month Code


Administrative Symbo

month year		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2021	2025	A	B	C	D	E	F	G	H	J	K	L	M
2022	2026	N	P	Q	R	S	T	U	V	W	X	Y	Z
2023	2027	a	b	c	d	e	f	g	h	j	k	l	m
2024	2028	n	p	q	r	s	t	u	v	w	x	y	z

SUGGESTED REFLOW PROFILE


Total time : 360 sec. Max.

Solder melting point :185 °C

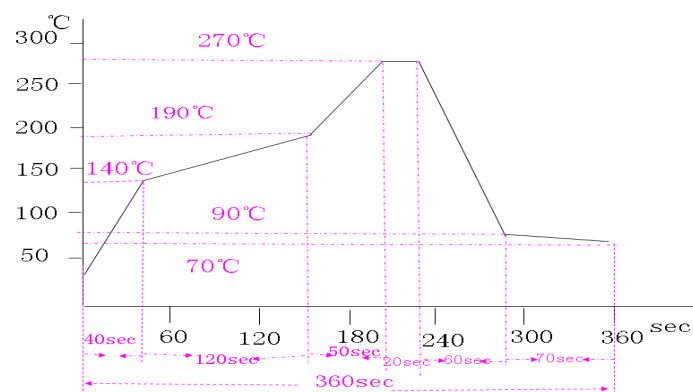



STRUCTURE ILLUSTRATION

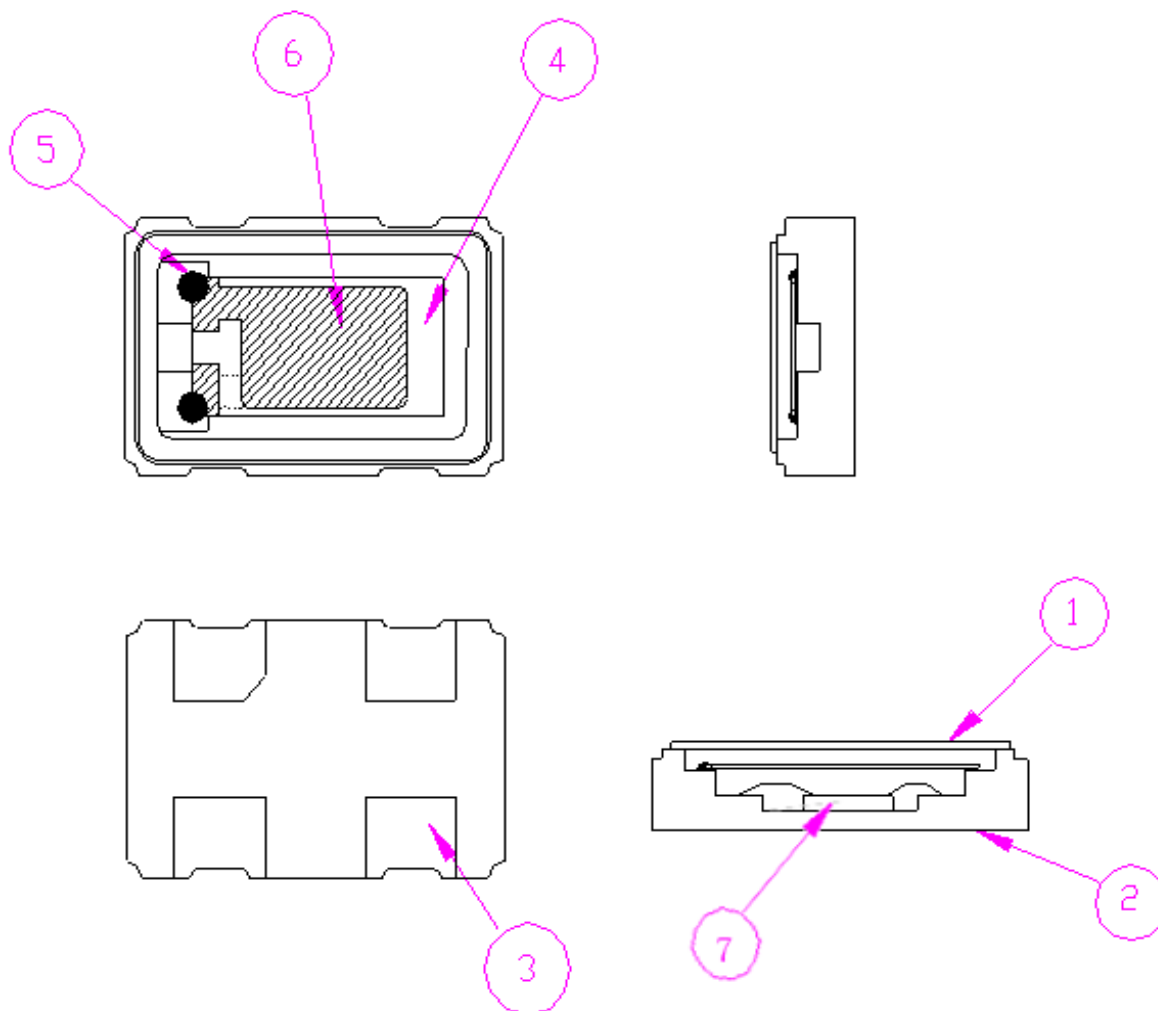

NO	COMPONENTS	MATERIALS	QTY	FINISH/SPECIFICATIONS
1	Cap (Lid)	Metal (Fe)	1	-
2	Base (Package)	Ceramic (Al_2O_3)	1	Alumina ceramics
3	Pad (Package)	Au	4	Tungsten metalize +Ni plating +Au plating
4	Crystal blank	SiO_2	1	-
5	Conductive adhesive	Ag	4	Silicone resin
6	Electrode	Noble metal	2	-
7	IC	Silicon (Si)	1	-



RELIABILITY SPECIFICATIONS


1.MECHANICAL ENDURANCE

No.	Test Item	Test Methods	
1	Drop Test	75 cm height, fall freely onto stainless plate 3 times.	JIS C6701
2	Mechanical Shock	Device are shocked to half sine wave (1000 G) three mutually pendicular axes each 3 times. 0.5m sec. duration time	MIL-STD-202F
3	Vibration	Frequency range 10 ~ 2000 Hz Amplitude 1.52 mm Pendicular axes each test time 4 hours (Total test time 12 hours)	MIL-STD-883E
4	Solderability	Temperature 260°C +/- 5 °C , 5 +/-1 sec Immersing depth 0.5 mm minimum Immersion time 10 +/- 0.5 seconds Flux Rosin resin methyl alcohol solvent (1 : 4)	MIL-STD-883E
5	Resistance To Soldering Heat	Pre-heat temperature 125 °C Pre-heat time 60 ~ 120 sec. Test temperature 260 +/- 5 °C Test time 5 +/- 1 sec.	MIL-STD-202F

*Storage conditions : 18 months

*Constant humidity : 40~70%


2.ENVIRONMENTAL ENDURANCE

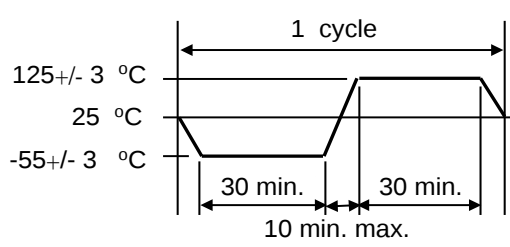No.	Test Item	Test Methods	
6	High Temp. Storage	+ 125 °C +/- 3 °C for 500 +/- 12 hours	MIL-STD-883E
7	Low Temp. Storage	- 40 °C +/- 3 °C for 500 +/- 12 hours	
8	Thermal Shock	Total 100 cycles of the following temperature cycle 	MIL-STD-883E
9	High Temp&Homidity	85°C±3°C, RH 85%,500Hrs	JIS C5023
10	Low Temp. Operation	- 40°C, VCC, for 1000 hours	MIL-STD-883E





PACKING :

8mm-4mm, 3000pcs / reel, ϕ 178;

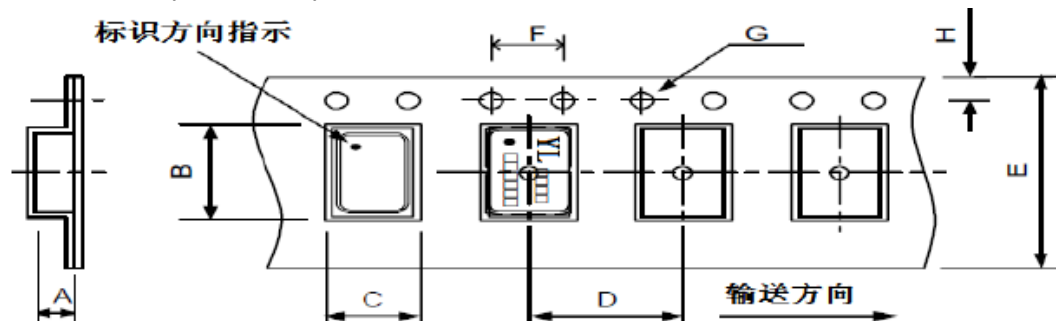

尺寸	A	B	C	D	E	F	G	H	单位:
	1.40 ± 0.1	3.40 ± 0.1	2.70 ± 0.1	4.00	8.00	4.00	1.50	1.75	mm

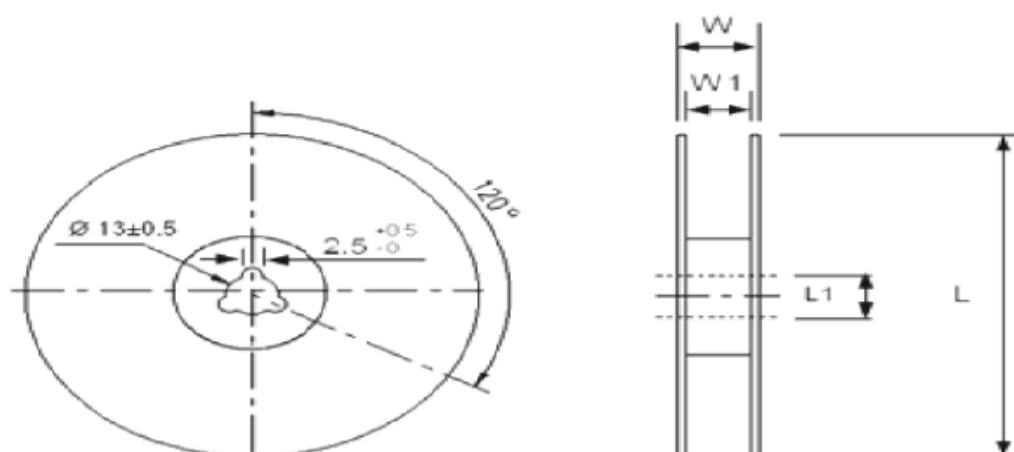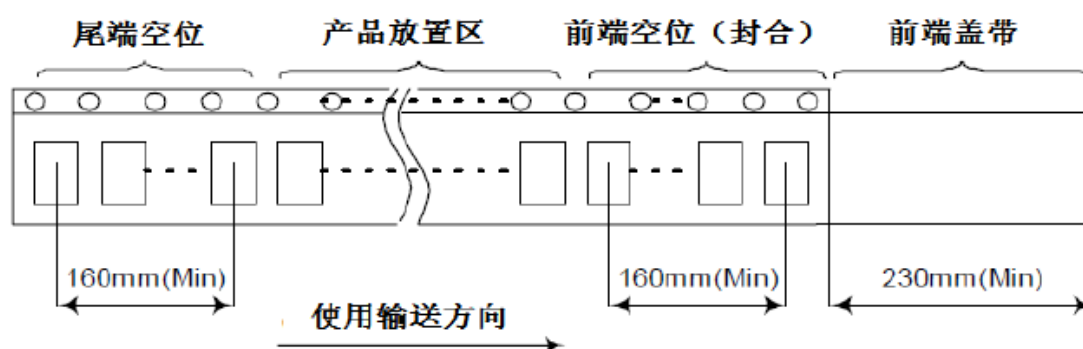

尺寸	L	L1	W	W1	单位: mm
	178	13	11.5	8	每卷数量: 3000 支



SMD PRODUCT PACKING STANDARD

Out-going packing instruction

Reel Packing	Inner Packing	Carton
name: reel standard: diameter 18cm material: plastics name: Anti-Static Shielding Bag standard: 205×250mm material: APET/ CPP	name: Anti-Static Bubble Bags standard: 430x330+20mm material: HDPE(15 reels enter)	name: carton standard: 400x400x280mm material: AB corrugated paper (60 boxes enter)
		
	PART NO : 3526000389 LOT NO : 20041400 Q'TY : 3000 FREQ : 26.000000MHz  MSL 1  MADE IN CHINA	

The label instruction

Label Drawing	Mark	Name of Article	Spec.	Size	Printing
PART NO : 3526000389 LOT NO : 20041400 Q'TY : 3000 FREQ : 26.000000MHz  MSL 1  MADE IN CHINA	L1	条码标签 Bar Code Label (Chintz Paper)	1.Part No. 2.Lot No. 3.Q'ty 4.Freq	70x50mm	White
PART NO : 3526000389 DATE CODE: 2015 Q'TY : 30000 FREQ : 26.000000MHz  MSL 1  MADE IN CHINA	L2	条码标签 Bar Code Label (Chintz Paper)	1.Part No. 2.Date Code 3.Q'ty 4.Freq	70x50mm	White

Remark

Specifications on the label is for the use of templates with different product specifications may vary.
If customer specified requirements for labels packaging, please provide the operation procedure.

 广东惠伦晶体科技股份有限公司 GUANGDONG FAITH LONG CRYSTAL TECHNOLOGY Co.,Ltd.		TEL : +86(0)769-38879888 FAX : 86(0)769-38879889	FL P/N: 3CQ3200016-Q VER: S1 PAGE: 9/9
Range	Products	Packing Material	
Banned Substances	Maximum concentration ppm(mg/kg)	Maximum concentration ppm(mg/kg)	
1.镉及镉化合物 Cadmium and cadmium compounds	100	100	
2.铅及铅化合物 Lead and lead compounds	1000	100	
3.汞及汞化合物 Mercury and mercury compounds	1000	100	
4.六价铬化合物 Hexavalent-Chromium VI (Cr+6)	1000	100	
5.聚溴联苯 PBB Polybrominated biphenyls	1000	N/A	
6.聚溴二苯醚 PBDE Polybrominated diphenyl ethers	1000	N/A	
7.邻苯二甲酸二(2-乙基己基)酯 DEHP Di (2-ethylhexyl) phthalate	1000	N/A	
8.邻苯二甲酸丁苄酯 BBP Butyl Benzyl Phthalate	1000	N/A	
9.邻苯二甲酸二丁酯 DBP Dibutyl Phthalate	1000	N/A	
10 邻苯二甲酸二异丁酯 DIBP Diisobutyl Phthalate	1000	N/A	
11. 氟 (F)、氯 (Cl)、溴 (Br)、碘 (I) Fluorine、Chlorine、Bromine、Iodine	900、900、900、900 注: Br+Cl<1000	N/A	
12.包装材料中重金属(汞、镉、六价铬、铅、PBB、PBDE)之总量 Heavy metals (mercury, cadmium, lead, Cr+6,PBB and PBDE) in packing materials	N/A	100 铅(Pb) + 镉(Cd) + 汞(Hg) + 六价铬 (Cr+6) <100ppm	
13.高度关注物质 SVHC-Substances of Very High Concern	1000	N/A	

