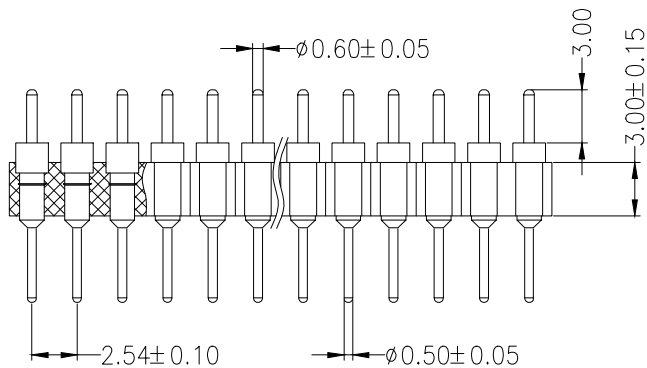
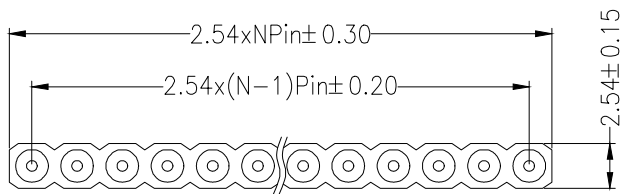


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

SPECIFICATIONS

Current Rating: 3.0AMP

Contact Resistance: $10 \text{m}\Omega$ Max

Dielectric Strength: Min 1000V RMS

Operation Temperature: -40°C to $+105^\circ\text{C}$

Contact Material: Brass

Contact Plating: Au Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PPS

Soldering Temperature: $260^\circ\text{C} \pm 5^\circ$ 5S

			GENERAL TOLERANCE	制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审 核 CHECK				
			X.X ± 0.30	批 准 APPROVAL	产品名称 TITLE	2.54x3.0 单排双头针 L=11.96 上针0.6 下针0.5	版 本 REV.	A
			X.XX ± 0.20	比 例 SCALE	产品料号 PART NO.	PZ254-1-N-Z-C	单 位 UNITS	mm
			X.XXX ± 0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1
1	初版发行		Angle $\pm 3.0^\circ$					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE						