

09	16.33	24.99	30.81	19.28	11.08
15	24.66	33.32	39.14	27.51	19.39
25	38.38	47.04	53.04	41.28	33.24
37	54.84	63.50	69.32	57.71	49.86
No. of Contact	A±0.25	B±0.15	C±0.38	D±0.25	E±0.25

BACK SHELL TIN FINISHED

FILLED, UL 94V-0 RATED, BLACK COLOR

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, FRONT SHELL NICKEL FINISHED





INSULATOR : PBT THERMOPLASTIC, 30% GLASS

CONTACT MATERIAL : BRASS

CONTACT FINISH : SELECTIVE GOLD FLASH
 RIVETED INSERT : BRASS MATERIAL ; NICKEL FINISHED
 WITH #4-40 THREADED RIVETED CLINCH NUTS

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 1.0 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
 INSULATION RESISTANCE : 1000 MEGOHMS MIN.
 TEMPERATURE RATING : -55°C ~ +105°C
 CONTACT RESISTANCE : 20 MILLIOHMS MAX.

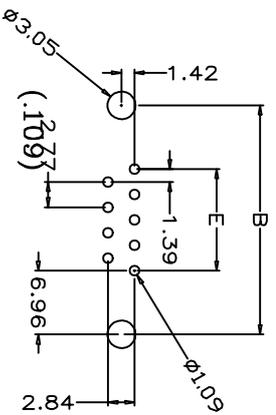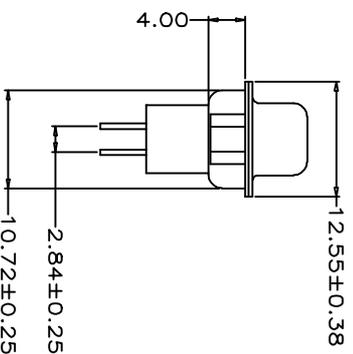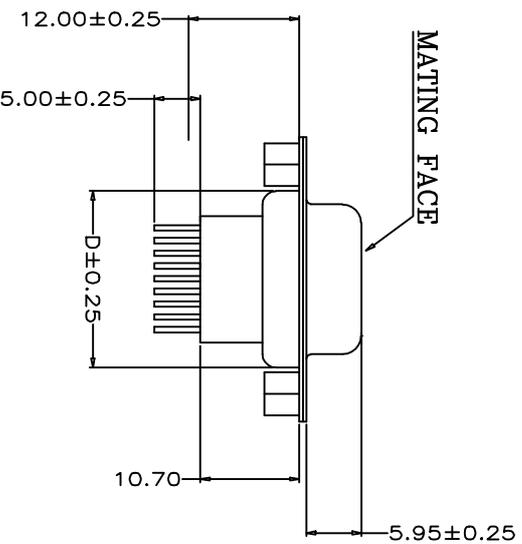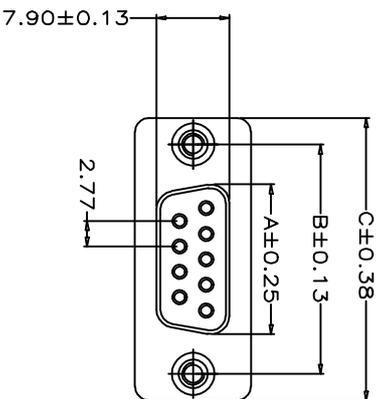

P.C.B LAYOUT

Tolerance	Drawn by	YANG FAN
Dimensions	Designed by	YANG FAN
I. ±0.38		
XX ±0.35		
X, II. ±0.25		
X, III. ±0.15		
Angle	DWG NO. CP-024	Scale 1:1
I. ° ±2°	Sheet 1 of 1	Unit mm
XX. ° ±10°	REV A0	
X, III. ° ±0.5°		

深圳市威尔杰电子有限公司

Title: DB 母头高塑胶 后铆螺母

Part No: 1408-092-01-1