



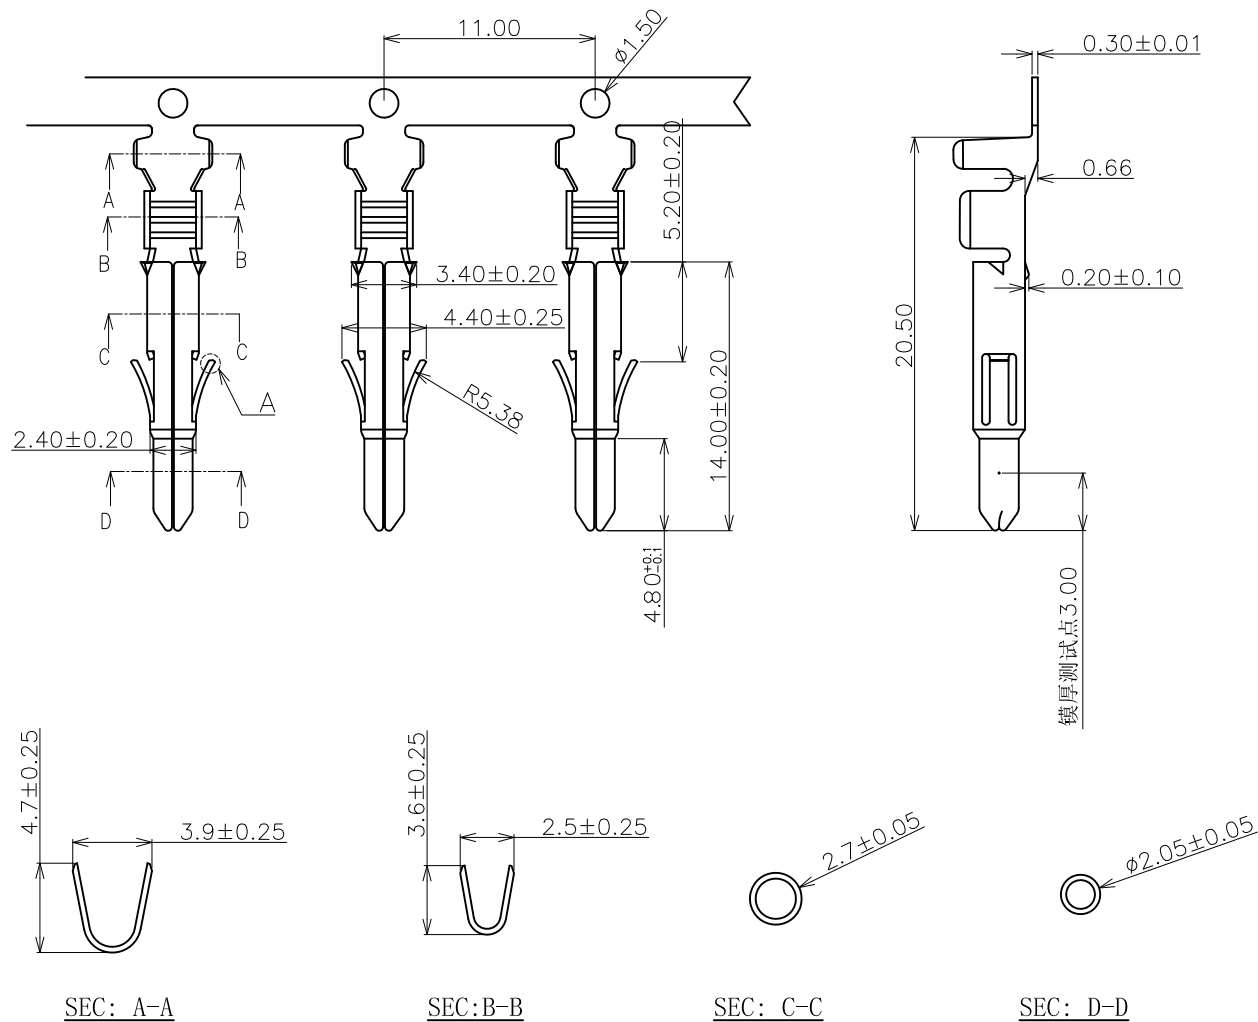

Current rating:19A AC,DC(Max)
Voltage rating:600V AC,DC
Temperature range:-40° C~+105° C
Contact resistance:3.5mΩ Max.
Insulation resistance:1000MΩ Min.
Withstanding voltage:5000V AC/minute
Reference Informations:
Used in C6351HM series Housing
C6351M-①-②-③

- ① pin information:
TB=Brass plated tin
② S=Standard
③ Client code

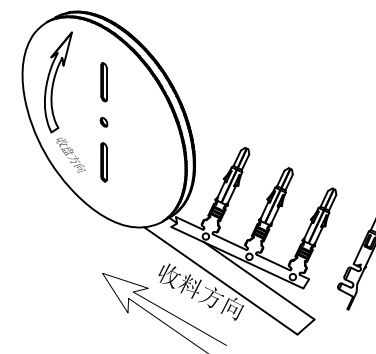

Ordering Information & Specifications

Unit: mm

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
C6351M-TB-S	AWG#16-#20	3.30mm(max)	Brass	Tin over Nickel	4,000PCS

Note:E-Stamping before Tin-plated

REVISION	DATE	DESCRIPTION	APPROVALBY	DRAWN BY	Li Huaming	DESIGNED BY	SCALE	1:1
△				CHECKED BY		MATERIALS	DATE	2016.05.26

深圳市威尔杰电子有限公司

C6351M-T-S

0.	±0.25
0.0	±0.20
0.00	±0.15
0.000	±0.05
VER NO.	A4
001	