


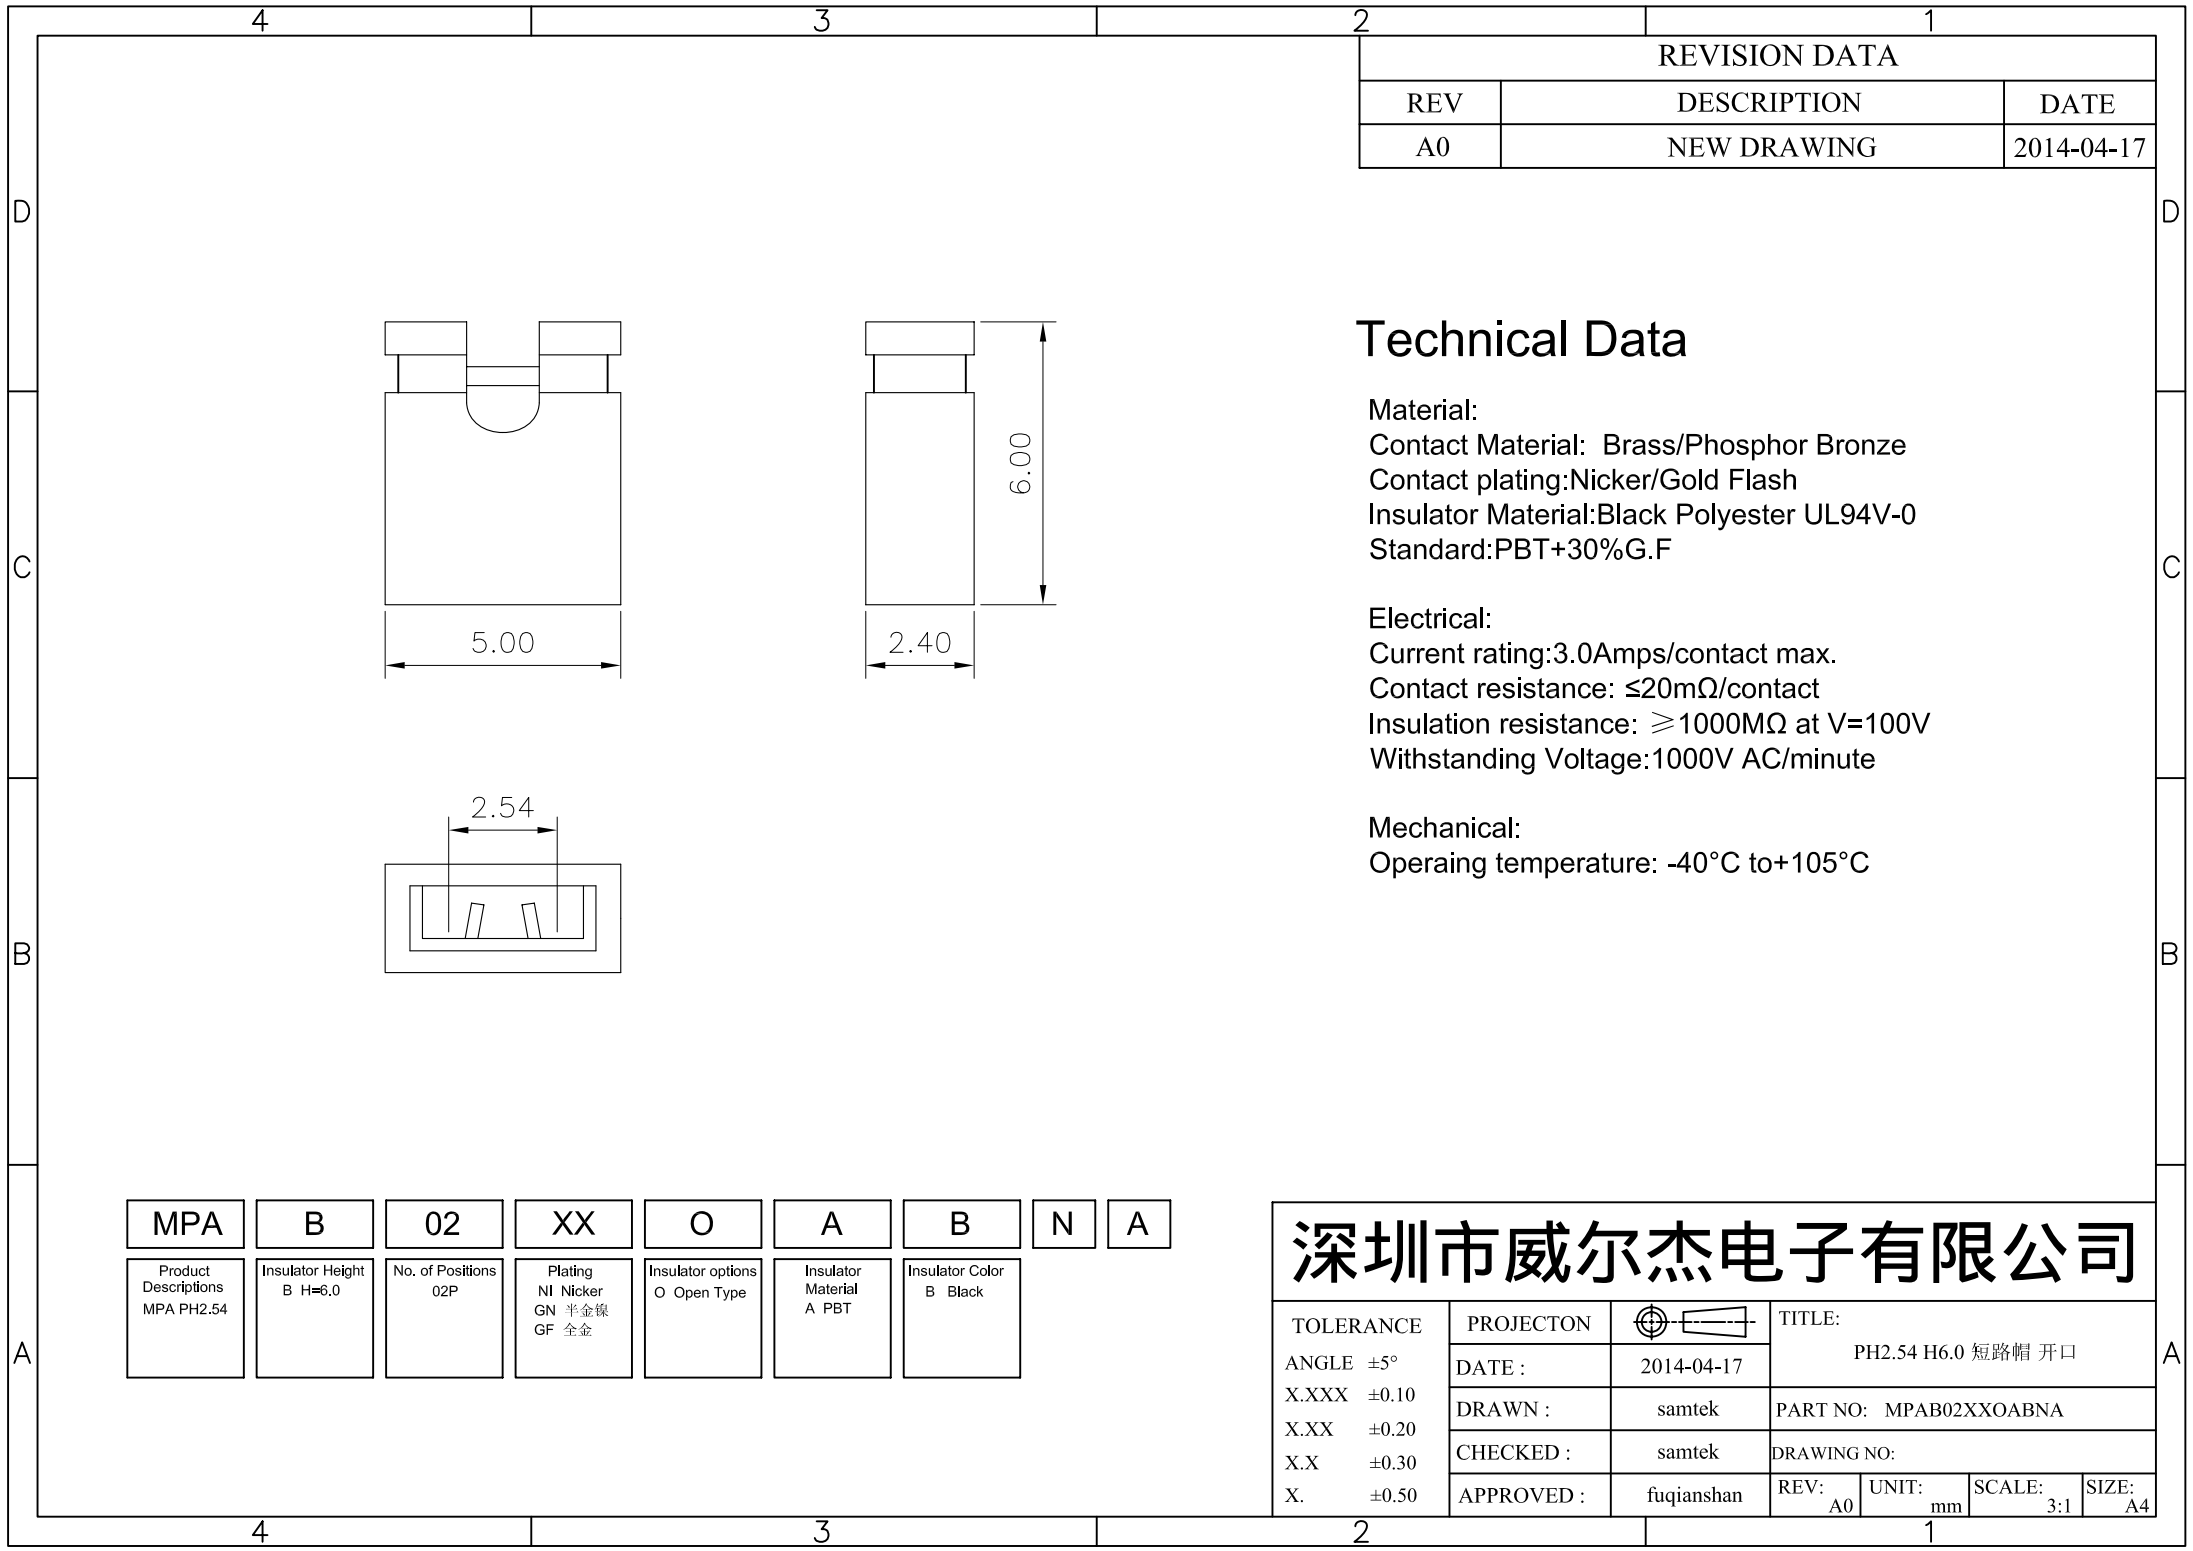

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2014-04-17

Technical Data

Material:
Contact Material: Brass/Phosphor Bronze
Contact plating:Nicker/Gold Flash
Insulator Material:Black Polyester UL94V-0
Standard:PBT+30%G.F

Electrical:
Current rating:3.0Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding Voltage:1000V AC/minute

Mechanical:
Operaing temperature: -40°C to+105°C

MPA	B	02	XX	O	A	B	N	A
Product Descriptions MPA PH2.54	Insulator Height B H=6.0	No. of Positions 02P	Plating NI Nicker GN 半金镍 GF 全金	Insulator options O Open Type	Insulator Material A PBT	Insulator Color B Black		

深圳市威尔杰电子有限公司

TOLERANCE	PROJECTON		TITLE:			
ANGLE ±5°	DATE :	2014-04-17	PH2.54 H6.0 短路帽 开口			
X.XXX ±0.10	DRAWN :	samtek	PART NO: MPAB02XXOABNA			
X.XX ±0.20	CHECKED :	samtek	DRAWING NO:			
X.X ±0.30	APPROVED :	fuqianshan	REV: A0	UNIT: mm	SCALE: 3:1	SIZE: A4
X. ±0.50						