





## PRODUCT PACKAGING

|                                                                                                                      |                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Package:<br/>265*170*145mm</p> |  <p>BST-878D</p>        |  <p>Power cable</p>                                                                                                                                                                                                                                                                                                                                                              |
|  <p>Soldering Iron frame</p>      |  <p>Soldering Iron</p> | <div data-bbox="979 1106 1302 1144"> <p>Starter</p>  </div> <div data-bbox="979 1196 1302 1252"> <p>Wrench</p>  </div> <div data-bbox="979 1285 1302 1375">  <p>Wind gun nozzle 5, 8, 10mm</p> </div> |

Pure copper transformer

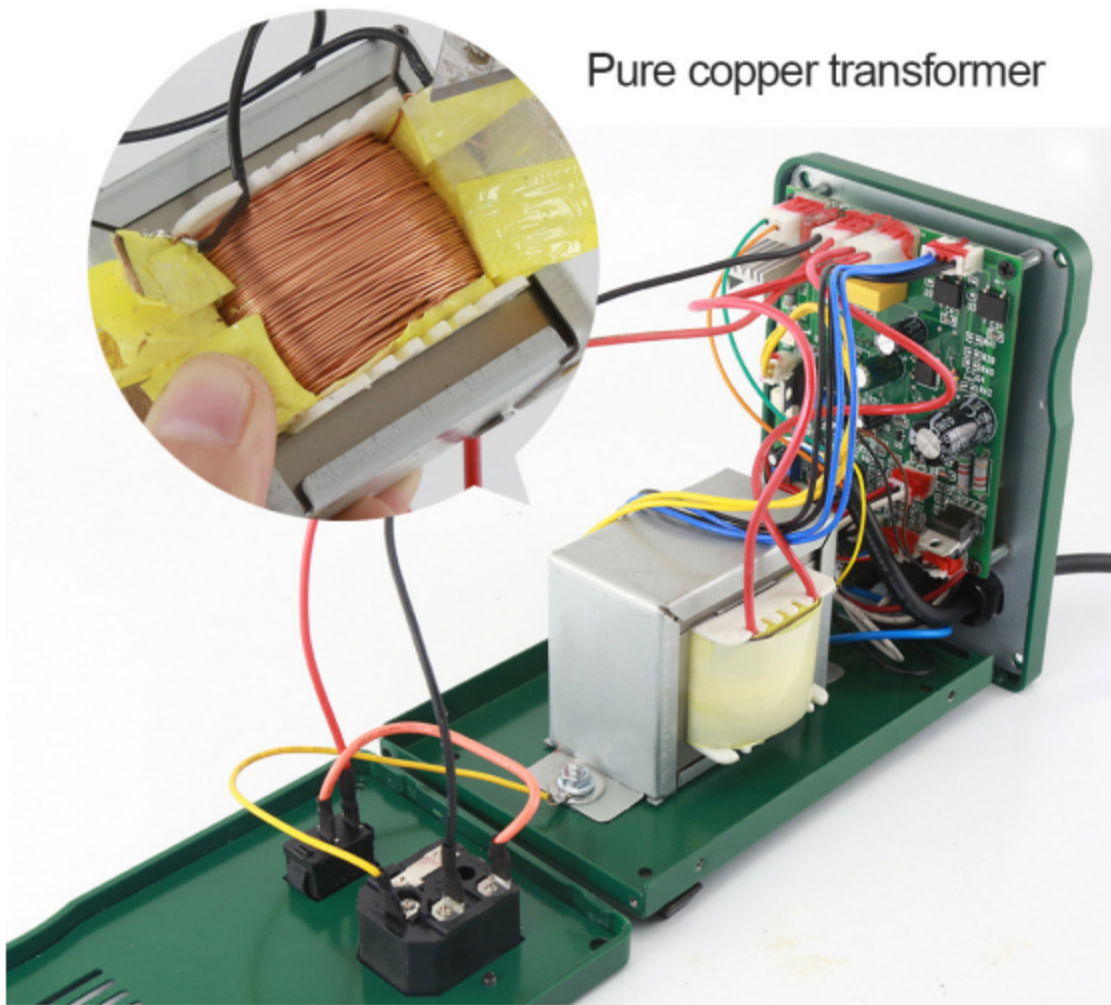

Rapid temperature rise  
durable Intelligent, put back on the  
bracket to automatically cool down




|                                   |                                                                                                                                                                    |                   |                                        |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------------------------------------|
| Brand:                            |                                                                                 | Name:             | 2 in 1 digital heat gun rework station |
| Model:                            | BST-878D                                                                                                                                                           | Rated voltage:    | AC 110/220V 50/60HZ                    |
| Rated power:                      | 700W/40W                                                                                                                                                           | Airflow:          | 120L/min (Max)                         |
| Air gun temperature range:        |                                                                                                                                                                    | 100 ° C - 480 ° C |                                        |
| Soldering iron temperature range: |                                                                                                                                                                    | 200 ° C - 480 ° C |                                        |
| Weight(including packaging):      | 2.65KG                                                                                                                                                             | Size:             | Packing: L265*W170*H145mm              |
|                                   |                                                                                                                                                                    |                   | Machine: L98*W140*H132mm               |
| Accessories:                      | 878D, wind gun nozzle 5, 8, 10mm, soldering iron frame, power cord, air gun handle, soldering iron handle, wrench, starter                                         |                   |                                        |
| Features:                         | 1. LED temperature display, temperature is accurate and stable, clearly visible                                                                                    |                   |                                        |
|                                   | 2. When the air gun is placed on the bracket, it will automatically enter the cooling and cooling standby. When the air gun is picked up, it will heat up quickly. |                   |                                        |
|                                   | 3. High power, fast heating, anti-static, temperature adjustable                                                                                                   |                   |                                        |

## PRODUCT FEATURES




## PRODUCT DETAILS

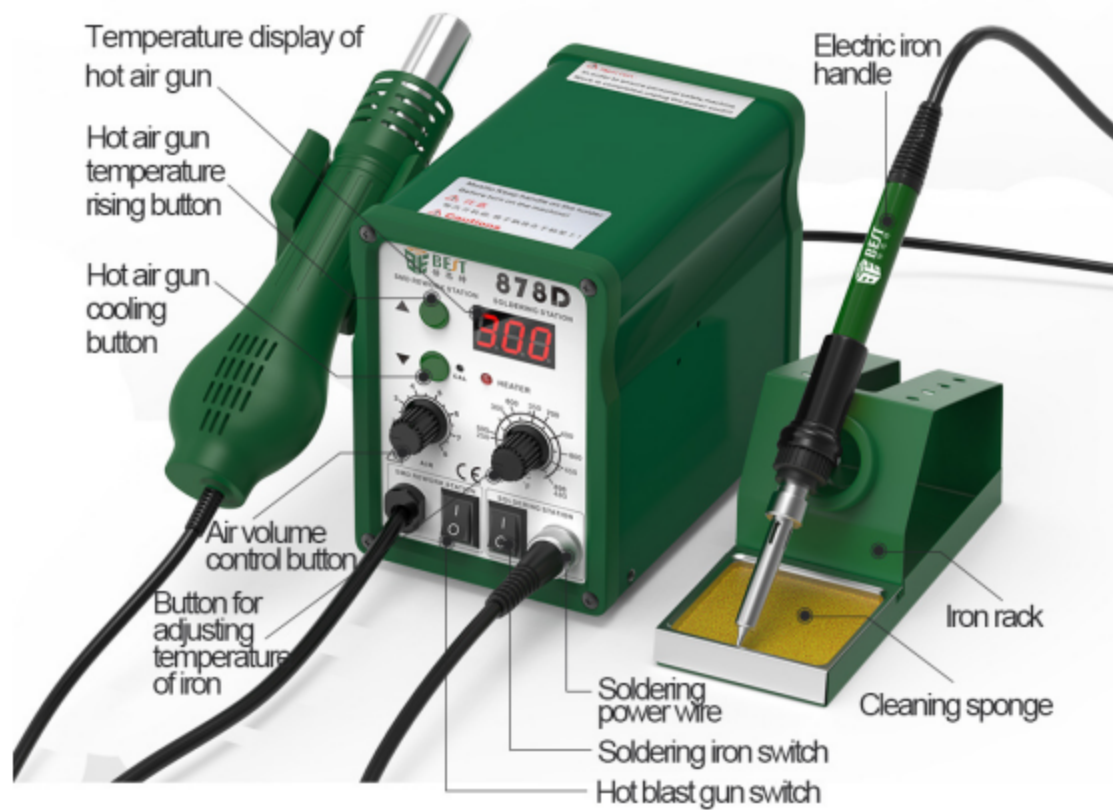

## PRODUCT SIZE



## 2 in 1 digital display lead-free helical wind hot air soldering station

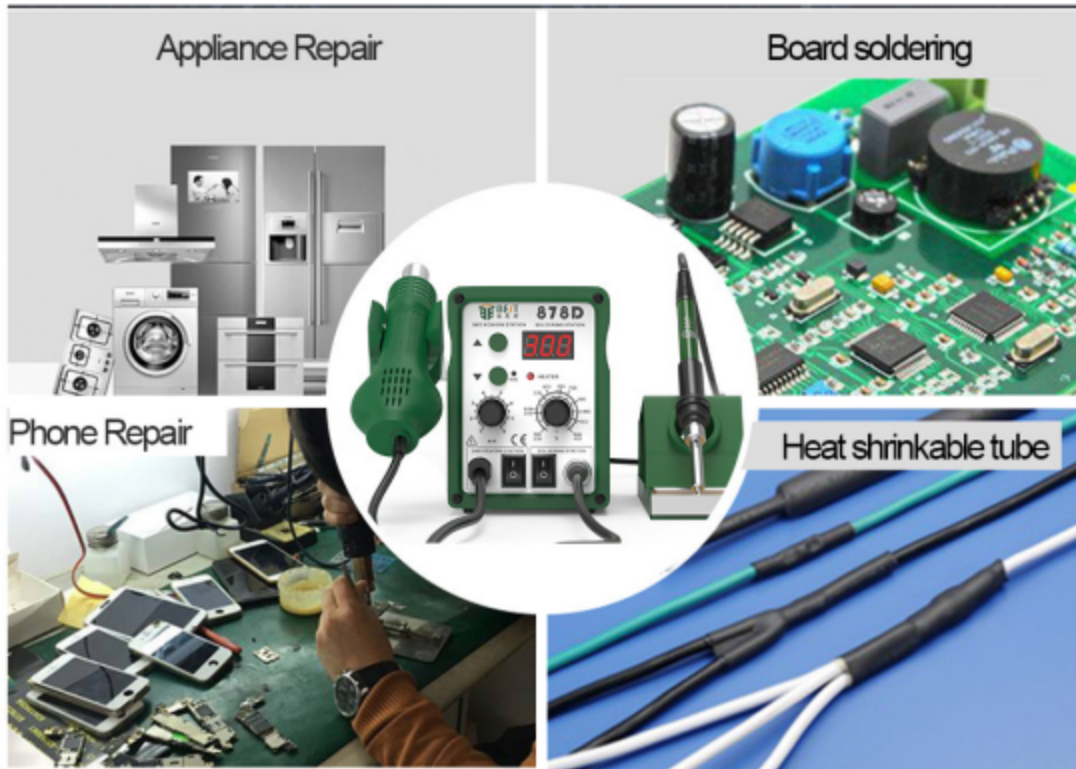

## 产品参数

| 额定工作条件 |                                                                  |
|--------|------------------------------------------------------------------|
| 额定电压   | AC 220V±10% 50Hz                                                 |
| 总机功率   | 750W±10% (Max)                                                   |
| 工作环境   | 0~40℃ 相对湿度<80%                                                   |
| 储存环境   | -20~80℃ 相对湿度35~45%                                               |
| 热风枪部分  |                                                                  |
| 工作电压   | AC 220V±10% 50Hz                                                 |
| 输出功率   | 700W±10%                                                         |
| 温度范围   | 100℃~480℃                                                        |
| 温度稳定度  | ±2℃ (静态)                                                         |
| 气流类型   | 进口无刷风机/柔和风                                                       |
| 气流量    | 120L/min (Max)                                                   |
| 风咀规格   | 直径分别为5mm 8mm 10mm                                                |
| 噪 音    | ≤45dB                                                            |
| 焊台部分   |                                                                  |
| 工作电压   | AC 26V±10% 50Hz                                                  |
| 输出功率   | 40W±10%                                                          |
| 温度范围   | 200℃~480℃                                                        |
| 温度稳定度  | ±2℃ (静态)                                                         |
| 焊咀对地阻抗 | <2Ω                                                              |
| 焊咀对地电压 | <2mV                                                             |
| 发热芯    | 四芯陶瓷发热芯                                                          |
| 烙铁线长   | 120cm                                                            |
| 包装规格   |                                                                  |
| 内箱尺寸   | 260*165*150mm                                                    |
| 一台重量   | 2.65kg                                                           |
| 外箱尺寸   | 580*370*340mm                                                    |
| 一件数量   | 8                                                                |
| 一件毛重   | 22.3kg                                                           |
| 配 件    | 878主机*1, 风枪手柄*1, 烙铁手柄*1, 烙铁架*1, 风咀*3, 起拔器*1, 扳手夹*1, 说明书*1, 电源线*1 |

## 产品包装







产品图片



## 产品说明



## 产品尺寸



## 产品描述



|       |                      |       |             |
|-------|----------------------|-------|-------------|
| 名称:   | 二合一数显热风枪返修台          | 型号:   | BST-878D    |
| 额定电压: | AC 110V/220V 50/60Hz | 额定功率: | 700W/40W    |
| 气流量:  | 120L/min(Max)        | 温度范围: | 100°C-480°C |
| 机身尺寸: | 98*148*132mm         | 机身重量: | 2.65kg      |